



Stepper Products

General Catalogue

Integrated Step-Servo Motor
Step-Servo Motor & Driver
Integrated Stepper Motor
Stepper Driver
Stepper Motor

Dawn of MOONS' 3A Era

1st A Motion Products & Motion Control Products for Manufacturing Automation

MOONS' is a leading manufacturer of the key parts, components and system level products used in manufacturing automation including: Stepper Motor and Drive, Brushless Motor and Drive, AC Servo Motor and Drive, Integrated solutions. We continue to play a major role in the manufacturing automation field with us moving forward to being a system level provider of total motion control solutions.

2nd A Intelligent LED Driver & Control Technologies for LED Lighting Management Automation

3rd A Online Asset Monitoring, Fault Detection and Diagnosis Solutions for EAM Automation



MOONS' Business Philosophies

- Customer satisfaction
- Employee satisfaction
- Partnership

MOONS' aims to enhance customer satisfaction through the provision development of innovative solutions, manufacture of high quality products, and ontime delivery and outstanding customer support.

MOONS' values and respects our employees input and encourages them to grow together with the company.

We have been working to develop tools and trainings to build a thriving culture of excellence internally to support the future growth of our employees and the company.

MOONS' strongly believes in a true integrated partnership between all partners in business including customers, distributors and all these in supply chain. As a result of our this philosophy, we endeavor to provide the best value contribution to all partners, which can help our partners improve their competitiveness to achieve the win-win situation.

Worldwide service map





moving in better ways

To demonstrate our commitment to our community and our customers, **MOONS'** has adopted as our official slogan: "Moving in Better Ways". These words have following meanings to **MOONS'**:

- **MOONS'** is an excellent global manufacturer of control motor & control motor drive system
- **MOONS'** is a leading global supplier of intelligent LED lighting control system and drive solutions
- **MOONS'** is a well-recognized reliable provider of system solutions for the intelligent system management in large asset-intensive industrial enterprises

We provide superior motion control systems to our global customers through optimizing of product design, engineering, and manufacturing. This is done by strengthening process and quality control and constantly creating solutions using motion control products that are more energy efficient and environmental friendly.

We provide leading-edge LED lighting drivers, controls and management solutions. Our leading lighting control technology makes the drive professional, convenient to use, and more energy efficient in reducing costs and enhancing profits for global customers.

We provide management system solutions for large asset-intensive industries including power generation, petrochemical, metallurgy, coal and large scale agriculture.

- **We are an ambitious and enterprising company**

MOONS' never stops the on-going accelerated pace to improve processes and increase efficiency. Through scientific management methodologies and tools and incorporating advanced technology with senior management experience, we constantly optimize management processes that enable **MOONS'** to maintain on-going growth in competitive markets.

- **We are a cooperative and thriving group**

All members of our team are able to incorporate the concept of moving in better ways during work, they continually upgrade our collective values, and strive for excellence in the process of doing business to improve expertise and gain better opportunities.

Motion Control Products and Solutions

MOONS' provides a wide range of motion control products and solutions serving the fields of printing, intelligent stage lighting, textile machinery, consumer appliance, banking equipment, factory automation, electronics, semiconductor equipment, packaging machinery, medical equipment and measuring equipment, to name a few.

Entering into the hybrid stepper motor business in 1997, **MOONS'** has grown to where it is now one of the top 5 global manufacturers of stepper motors, and an integrated provider of related motion control products and solutions.

MOONS' has been and is concentrating on technological advancement, product design innovation and improvement for standard and customized motion control products and solutions. Cutting edge technologies, product improvement and scientifically proven management systems permit **MOONS'** to exceed customers' requirements around the world. **MOONS'** supports our growing customer base by providing exceptional quality, application engineering, rapid prototyping, regional warehousing and competitive pricing.



Introduction to Stepper Motors

A stepper motor is an electromechanical device which converts electrical pulses into discrete mechanical movements. The shaft of a stepper motor rotates in discrete step increments when electrical command pulses are applied to it in the proper sequence.


Stepper motors are the easiest devices for precise positioning control. They are widely being used in various application for position and speed via all kinds of control signals such as digital, analog, communication etc.

■ Features

◇ Precise Positioning Control


A stepper motor rotates with a fixed step angle, just like the second hand of a clock. This angle is called "basic step angle." MOONS' offers several types of "basic step angle" as standard motors: 2-phase stepping motors with a basic step angle of 0.9° and 1.8° and 3-phase stepping motors with a basic step angle of 1.2°.

Besides the standard motor, MOONS' also has stepper motors available with other "basic step angle." They are 0.72°, 1.5°, 3.6° and 3.75°, these motors are not listed in this catalogue, please contact MOONS' for details.

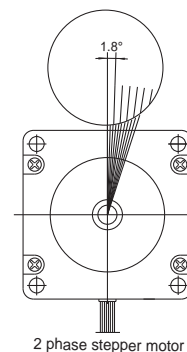

◇ Easy Control with Pulse Signals

A system configuration for high accuracy positioning is shown below. The rotation angle and speed of the stepping motor can be controlled accurately using pulse signals from the controller.

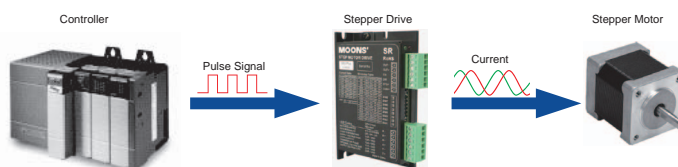


■ What is a Pulse Signal?

A pulse signal is an electrical signal whose voltage level changes repeatedly between ON and OFF.

Each ON/OFF cycle is counted as one pulse. A command with one pulse causes the motor output shaft to turn by one step.

The signal levels corresponding to voltage ON and OFF conditions are referred to as "H" and "L," respectively.

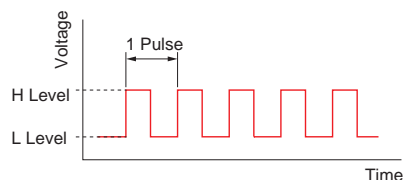


■ The length of Rotation is Proportional to the Number of Pulses

The length of rotation of the stepping motor is proportional to the number of pulse signal (pulse number) given to the driver.

The relationship of the stepper motor's rotation (rotation angle of the motor output shaft) and pulse number is expressed as follows:

$$\theta = \theta_s \times A$$

θ : Rotation angle of the motor output shaft [deg]
 θ_s : Step angle [deg/step]
 A : Pulse number [pulses]

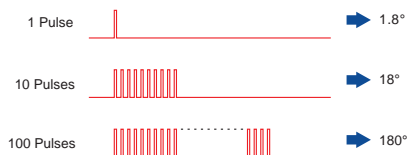


■ The Speed is Proportional to the Pulse Frequency

The speed of the stepper motor is proportional to the frequency of pulse signals given to the driver.

The relationship of the pulse frequency [Hz] and motor speed [r/min] is expressed as follows:

$$N = \frac{\theta_s}{360} \times f \times 60$$

N : Speed of the motor output shaft [r/min]
 θ_s : Step angle [deg/step]
 f : Pulse frequency [Hz]
 (Number of pulses input per second)

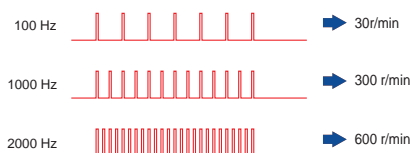

Efficient Integrated TSM	IP65 Integrated TXM	Motor & Drive RS	Motor & Drive SS	Pulse Input With Controller STM-R	With Controller With Controller STM	IP65 With Controller With Controller SWM	Pulse Input With Controller SRAC	With Controller With Controller STAC	Pulse Input With Controller SR	Field Bus With Controller STF	With Controller With Controller ST	AC Input 2-Phase Stepper Drive	DC Input 3-Phase Stepper Drive	2-Phase Stepper Motor	3-Phase Stepper Motor	UL	Power Supplies	Cables	Software	Glossary
--------------------------	---------------------	------------------	------------------	-----------------------------------	-------------------------------------	------------------------------------------	----------------------------------	--------------------------------------	--------------------------------	-------------------------------	------------------------------------	--------------------------------	--------------------------------	-----------------------	-----------------------	----	----------------	--------	----------	----------


◇ Generating High Torque with a Compact Size

Stepper motors generate high torque with a compact size.


These features give them excellent acceleration and response, which in turn makes these motors well-suited for torque-demanding applications where the motor must be started and stopped frequently.

To meet the need for greater torque at low speed, MOONS' also has geared motors option.

- Frequent Starting/Stopping is Possible




- Speed VS Torque Characteristics comparison between servo and stepper with same motor size.

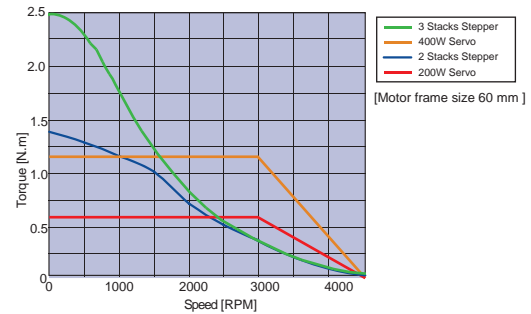


◇ The Motor Holds Itself at a Stopped Position

Stepper motor has full torque at stand-still as long as the windings are energized. This means that the motor can be held at a stopped position without using a mechanical brake.

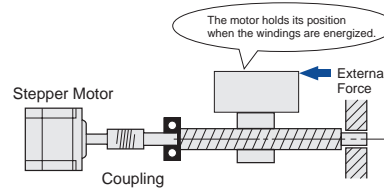

◇ Motor with Electromagnetic Brake

Once the power is cut off, the self-holding torque of the motor is lost and the motor can no longer be held at the stopped position in vertical operations or when an external force is applied. In lift and similar applications, an electromagnetic brake type motor is required.




◇ Closed Loop Servo Control Stepper Motors

Step-Servo

The **Step-Servo** is an innovative revolution for the world of stepping motor, it enhances the stepping motor with servo technology to create a product with exceptional feature and broad capability.

The **Step-Servo** greatly improves the performance to be much more Intelligent, Efficient, Compact, Accurate, Fast and Smooth.

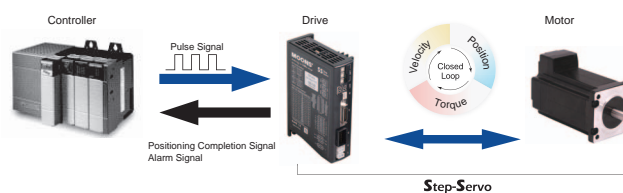

■ Stepper Motor Category

Stepper motors come in different types including the basic type, encoder type, IP65 type, Integrated type with drive and controller, brake type and geared type. The availability of all options can also be combined together as the most optimize and compact motion control unit, for example, MOONS' can offer encoder and geared type, IP65 integrated with drive, controller and encoder, all combinations are available per request.


<p>◇ Basic Type</p> <p>A basic model that is easy to use and designed with a balanced set of functions and characteristics.</p>	
<p>◇ Encoder Type</p> <p>Encoder type stepper gives the possibility for closed loop control, encoder feedback signals can be used for position verification and enhanced performance as stall detection and stall prevention depending on the features of the drive.</p>	
<p>◇ IP65 Type</p> <p>IP65 type stepper motors with the feature of dust proof and resistant to low pressure water jets, are ideal for applications in wet factory environments such as the food and beverage industry or outdoor use.</p> <p>IP65 specifies a product that is dust tight (no ingress of dust; complete protection against contact) and protected against water jets (water projected by a nozzle from any direction shall have no harmful effects).</p>	
<p>◇ Integrated Type with Drive and Controller</p> <p>Integrated stepper motors offer a space-saving design that reduces wiring and saves on cost over separate motor and drive components. For controller type, you only need cable connection for Power and necessary communication or sensor depending on application, it also cost for host controller and make it easy for you to setup sofiscated motion control system.</p>	
<p>◇ Brake Type</p> <p>These motors incorporate a non-excitation type electromagnetic brake. When the power is accidentally cut off due to power outage or other unexpected event, the electromagnetic brake holds the load in position to prevent it from dropping or moving. Brake type steppers are wildly used in vertical axis application.</p>	
<p>◇ Geared Type</p> <p>These motors incorporate a dedicated position-control gearhead with reduced backlash to make the most of the high controllability of the motors.</p> <p>The gearhead ensures highly accurate, smooth operation even in applications where a large torque is received.</p>	

Control Modes for Drives

With MOONS' advanced stepper drive technology, each stepper motor can be operated under various control modes as position control, velocity control or torque control. MOONS' stepper drive accepts all types of control signals including digital, analog and Industrial network communications. Built-in controller Q drive supports stand alone operation for single axis motion by stored sofiscated program execution.

◇ Pulse Control

Pulse control is a traditional way to command a stepper motor in position and velocity control. The length of rotation is proportional to the number of pulses as well as the speed is proportional to the pulse frequency.

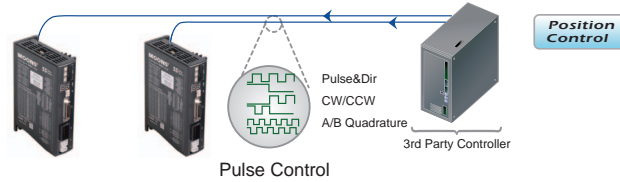

Three most popular pulse control digital signal types are Pulse & Direction, CW/CCW Pulse and A/B Quadrature.


■ Pulse & Direction

When the Pulse input is turned ON while the DIR input is ON, the motor will rotate by one step in one direction.

When the Pulse input is turned ON while the DIR input is OFF, the motor will rotate by one step the other direction.

*Direction definition of DIR input can be configured via MOONS' software.

The chart below shows motor configured as while the DIR input is ON, the motor will rotate by CW direction.




■ CW/CCW Pulse

When the X1 input is turned ON, the motor will rotate by one step in One direction. When the X2 input is turned ON, the motor will rotate by one step in the other direction.

*Direction definition can be configured via MOONS' software.

The chart below shows motor configured as while the X1 input is ON, the motor will rotate by one step in CW direction.




■ A & B Quadrature

The motor will move according to signals that are fed to the drive from a two channel incremental master encoder.


Direction definition can be configured via MOONS' software. Direction is determined via which channel leads the other.

The chart below shows motor configured as while X1 Leads X2, the motor will rotate by CW direction.

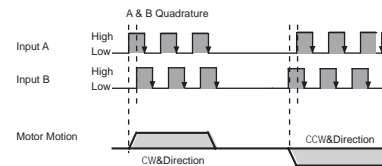


◇ Analog Control

MOONS' stepper drive has the ability to accept analog signal for position and analog control, **Step-Servo** can also use analog signal for torque control.

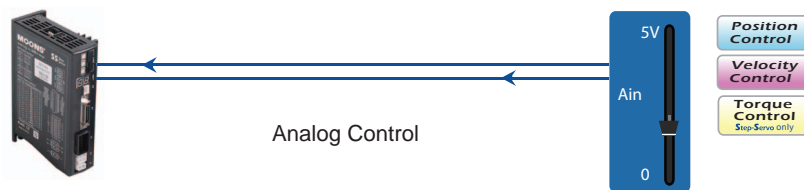


Field Bus Control

MOONS' stepper drive supports all popular Industrial network communications including RS-485, Modbus, CAN , Ethernet and EtherCAT.

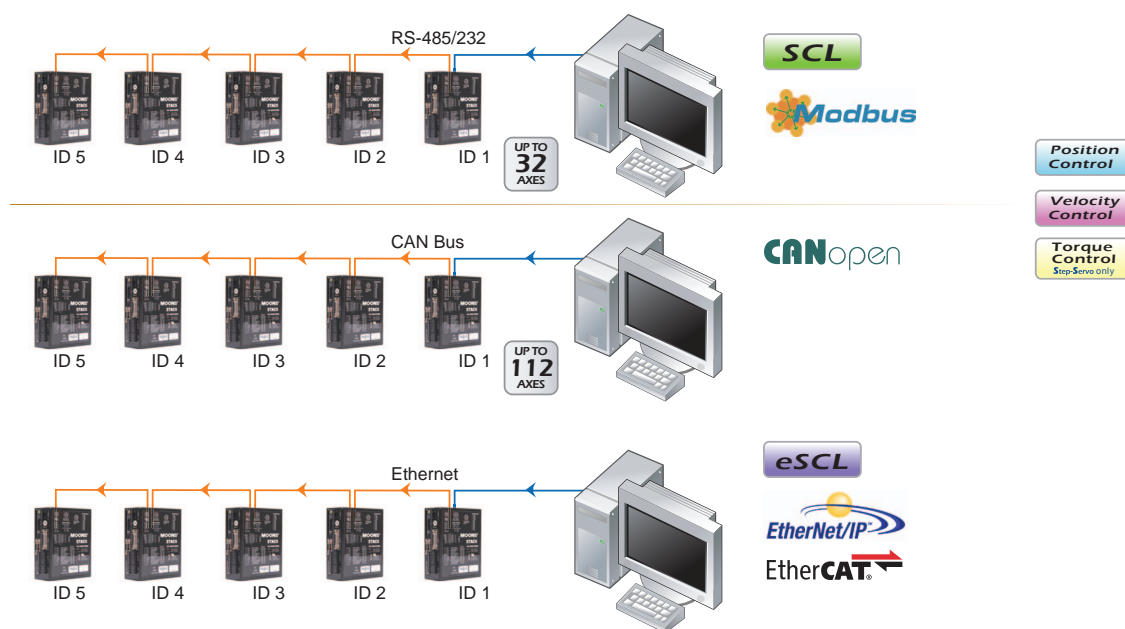

Stand Alone Operation

MOONS' Built-in controller Q drive supports stand alone operation for single axis motion by stored sofiscated program execution. It has the ability to run up to 744 lines of stored Q program in non-volatile memory. Q programs are created using the Q Programmer software, which provides multi-tasking, math calculations using analog and digital parameters, conditional processing, data register manipulation, and more features in a robust yet simple text-based programming language.

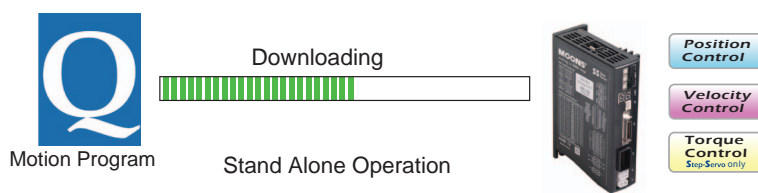

Efficient Integrated TSM	IP65 Motor & Drive	AC Input	2-Phase Stepper Drive	3-Phase Stepper Drive	Stepper Motor	Accessories	Appendix
Integrated SSM	RS	SRAC	SR	DC Input	UL	Power Supplies	Glossary
IP65 Integrated TXM	SS	STAC	STF	AC Input	2-Phase	Cables	
Position Control			ST	DC Input	3-Phase	Software	
Velocity Control					UL	Appendix	
Torque Control Step-Servo only							

Overview of MOONS' Stepper Products

◇ Closed Loop **Step-Servo**

TSM Series - Integrated **Step-Servo**



Frame Size: 28mm, 42mm, 56mm, 60mm, 86mm

Input Voltage(Typical): TSM11:24VDC TSM17:12-48VDC
TSM23/24:12-70VDC TSM34: 24-70VDC

Encoder: Incremental 20000 counts/rev
(only TSM11 encoder 4096 counts/rev)

Enhanced Intelligence:

- Automatic load inertia detection
- Extended homing and software limit

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control, Daisy Chain
- Stand alone operation

Inputs and Outputs:

- P Type- 4 Digital Inputs, 3 Digital Outputs, Encoder Outputs
- S/Q/C/IP Type- 8 Digital Inputs, 4 Digital Outputs, 1 Analog Input

Communication:



Position Control

Velocity Control

Torque Control

SSM Series - Integrated **Step-Servo**



Frame Size: 42mm, 56mm, 60mm

Input Voltage(Typical): SSM17: 12-48VDC SSM23/24: 12-70VDC

Encoder: Incremental 20000 counts/rev

Easy Wiring with Spring Connectors

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control
- Stand alone operation

Inputs and Outputs:

- S/Q Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- C Type- 3 Digital Inputs, 1 Digital Output

Communication:



Position Control

Velocity Control

Torque Control

TXM Series - IP65 Type Integrated **Step-Servo**



Frame Size: 60mm, 86mm

Input Voltage(Typical): TXM24: 12-70VDC TXM34: 24-70VDC

Encoder: Incremental 20000 counts/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control(Daisy Chain for RS-485 and CANopen)
- Stand alone operation

Inputs and Outputs:

- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- C Type- 5 Digital Inputs, 3 Digital Outputs

Communication:



Position Control

Velocity Control

Torque Control

RS Series - **Step-Servo** Motor & Drive Package



Motor Frame Size: 28mm, 42mm, 56mm, 60mm, 86mm

Input Voltage(Typical): 24-70VDC

Encoder: Magnetic 4096 counts/rev

Enhanced Intelligence:

- Automatic load inertia detection and switch set stiffness
- Extended homing and software limit

Control Modes:

- Pulse Control
- SCL Command Control
- Stand alone operation

Inputs and Outputs:

- P Type- 4 Digital Inputs, 3 Digital Outputs, Encoder Outputs
- S/Q Type- 4 Digital Inputs, 3 Digital Outputs

Communication:



Position Control

Velocity Control

Torque Control



SS Series - Step-Servo Motor & Drive Package



Motor Frame Size: 28mm, 42mm, 56mm, 60mm, 86mm

Input Voltage(Typical): 24-70VDC

Encoder: Incremental 20000 counts/rev
(only AM11SS motor encoder 4096 counts/rev)

Position
Control

Velocity
Control

Torque
Control

Enhanced Intelligence:

- Automatic load inertia detection and switch set stiffness
- Extended homing and software limit

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control(Daisy Chain for RS-485, CANopen and EtherCAT)
- Stand alone operation

Inputs and Outputs:

- P/R Type- 6 Digital Inputs, 2 Digital Outputs, Encoder Outputs
- S/Q/C/EC Type- 8 Digital Inputs, 4 Digital Outputs, 2 Analog Inputs

Communication:



◇ Integrated Stepper Motor

STM-R Series - Pluse Input Type Integrated Stepper Motor



Frame Size: 42mm, 56mm

Input Voltage(Typical): STM17R: 12-48VDC STM23R: 12-70VDC

Encoder Option: Incremental 4000 counts/rev

Microstep Resolution: Switch set, up to 25600 steps/rev

Control Modes:

- Pulse Control

Inputs and Output:

- 3 Digital Inputs, 1 Digital Output

Position
Control

STM Series - Controller Type Integrated Stepper Motor



Frame Size: 28mm, 42mm, 56mm, 60mm

Input Voltage(Typical):

- STM11 - 24VDC
- STM17 - 12-48VDC
- STM23/24 - 12-70VDC

Encoder Option: Incremental 4000 counts/rev

- Stall Detection
- Stall Prevention

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control
- Stand alone operation

Inputs and Outputs:

- STM11 4 digital Inputs, 2 Outputs
- SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- C Type- 3 Digital Inputs, 1 Digital Output

Communication:



Position
Control

Velocity
Control

SWM Series - IP65 Type Integrated Stepper Motor



Frame Size: 60mm

Input Voltage(Typical): 12-70VDC

Encoder Option: Incremental 4000 counts/rev

- Stall Detection
- Stall Prevention

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control(Daisy Chain for RS-485 and CANopen)
- Stand alone operation

Inputs and Outputs:

- SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input

Communication:



Position
Control

Velocity
Control

Efficient Integrated TSM	Step-Servo	IP65 Integrated TXM	Motor & Drive RS	Motor & Drive SS	Integrated Stepper Motor	IP65 STM	AC Input SRAC	2-Phase Stepper Drive	DC Input ST	3-Phase Stepper Drive	AC Input	DC Input	Stepper Motor	2-Phase	3-Phase	UL	Accessories	Power Supplies	Cables	Software	Glossary
--------------------------	------------	---------------------	------------------	------------------	--------------------------	----------	---------------	-----------------------	-------------	-----------------------	----------	----------	---------------	---------	---------	----	-------------	----------------	--------	----------	----------

◇ Two Phase Stepper Drive

SRAC Series - AC Input Stepper Drive



Input Voltage(Typical): AC120V/240V

Drive Output Current: Up to 8Amp(Peak of Sine)

Microstep Resolution: Switch set, up to 25600 steps/rev

Control Modes:

- Pulse Control

Inputs and Outputs:

- 3 Digital Inputs, 1 Digital Output

Supported Motor Frame Size: 56mm, 60mm, 86mm

Position Control

STAC Series - AC Input Controller Type Stepper Drive



Input Voltage(Typical): AC120V/240V

Drive Output Current: Up to 2.5Amp(Peak of Sine)

Encoder Option: Incremental

- Stall Detection
- Stall Prevention

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control
- Stand alone operation

Inputs and Outputs:

- S/Q/C Type- 4 Digital Inputs, 2 Digital Outputs, 1 Analog Input
- Q-A/IP Type- 12 Digital Inputs, 6 Digital Outputs, 1 Analog Input

Communication:




Supported Motor Frame Size: 56mm, 60mm, 86mm

Position Control

Velocity Control

SR Series - DC Input Stepper Drive

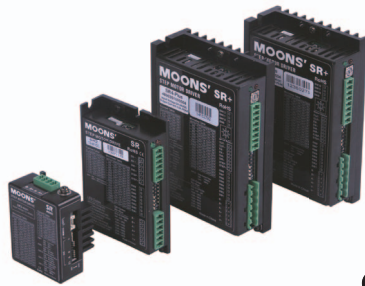

Input Voltage(Typical):

- SR2/SR2-Plus/SR3-mini: 12- 48VDC

- SR4/SR4-Plus: 24-48VDC

- SR8/SR8-Plus: 24-80VDC

Drive Output Current: Up to 7.8Amp(Peak of Sine)

Microstep Resolution: Switch set, up to 51200 steps/rev

Control Modes:

- Pulse Control

Inputs and Outputs:

- 3 Digital Inputs, 1 Digital Output

Supported Motor Frame Size:

- 20mm, 28mm, 35mm, 42mm, 56mm, 60mm, 86mm

Position Control

STF Series - Intelligent field bus control Stepper Drive



Input Voltage(Typical): DC12V/24V/48V

Drive Output Current: Up to 10Amp(Peak of Sine)

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Field Bus Control
- Stand alone operation

Inputs and Outputs:

- 8 Digital Inputs, 4 Digital Outputs

Communication:



Supported Motor Frame Size:

- 20mm, 28mm, 35mm, 42mm, 56mm, 60mm, 86mm

Position Control

Velocity Control

ST Series - DC Input Controller Type Stepper Drive



Input Voltage(Typical): DC24V/48V

Drive Output Current: Up to 10Amp(Peak of Sine)

Encoder Option: Incremental

- Stall Detection
- Stall Prevention

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control
- Stand alone operation

Inputs and Outputs:

- S type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- Q/C/IP- 8 Digital Inputs, 4 Digital Outputs, 2 Analog Inputs

Communication:



Supported Motor Frame Size:

- 28mm, 35mm, 42mm, 56mm, 60mm, 86mm

Position
Control

Velocity
Control

◇ Three Phase Stepper Drive

AC Input Stepper Drive and DC Input Stepper Drive



Drive Input Voltage(Typical):

- AC 120V/240V
- DC 24V/48V

Control Modes:

- Pulse Control
- Analog Control
- Stand alone operation

Inputs and Outputs:

- 3 Digital Inputs, 1 Digital Output


Supported Motor Frame Size: 60mm, 86mm

Step-Servo	Efficient Integrated TSM
	Integrated SSM
	IP65 Integrated TXM
	Motor & Drive RS
	Motor & Drive SS
Integrated Stepper Motor	Pulse Input STM-R
	With Controller With Controller STM
	IP65 With Controller With Controller SWM
2-Phase Stepper Drive	AC Input SRAC
	With Controller With Controller STAC
	Pulse Input SR
	Field Bus STF
	With Controller With Controller ST
3-Phase Stepper Drive	AC Input
	DC Input
Stepper Motor	2-Phase
	3-Phase
	UL
Accessories	Power Supplies
	Cables
Appendix	Software
	Glossary

◇ Stepper Motor

Standard Motors

2-Phase Basic Type

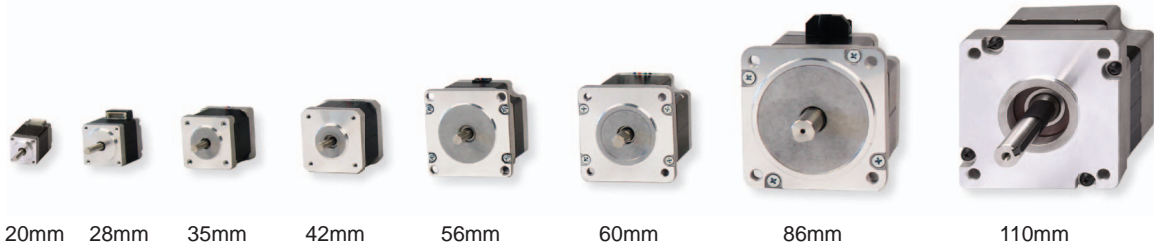

20mm 28mm 35mm 42mm 56mm 60mm 86mm 110mm

2-Phase PowerPlus Series Type




56mm

2-Phase IP65 Type




56mm 60mm 86mm

2-Phase Encoder Type

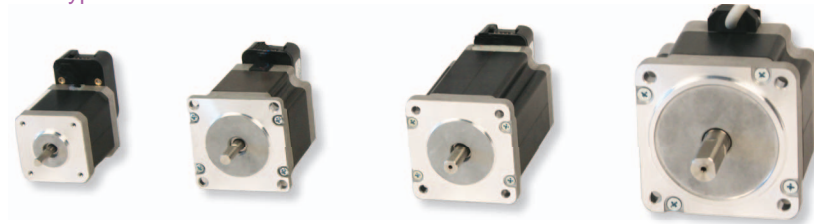

42mm 56mm 60mm 86mm

2-Phase Brake Type

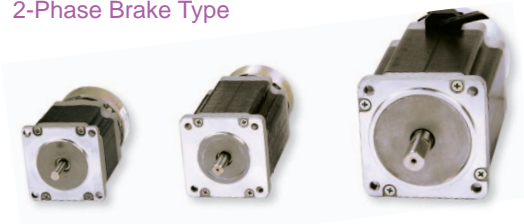


42mm 60mm 86mm

3-Phase Basic Type



60mm 86mm

Planetary Reducer Motors Type

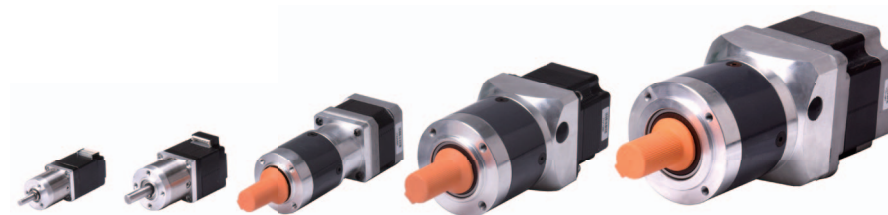

20mm 28mm 42mm 57mm(60) 86mm

Stepper General Catalogue

		MOONS'
Step-Servo	Efficient Integrated TSM Series25	Efficient Integrated TSM
	Integrated SSM Series.....60	Integrated SSM
	IP65 Type Integrated TXM Series.....69	IP65 Integrated TXM
	Motor & Drive Package RS Series82	Motor & Drive RS
	Motor & Drive Package SS Series97	Motor & Drive SS
Integrated Stepper Motor	Pulse Input Type STM-R.....135	IP65 Pulse Input STM-R
	Controller Type STM Series142	IP65 With Controller STM
	IP65 Controller Type SWM Series156	IP65 With Controller SWM
Two Phase Stepper Drive	Pulse Input Type SRAC Series169	AC Input Pulse Input SRAC
	With Contrller Type STAC Series179	AC Input With Controller STAC
	DC Input SR Series195	DC Input Pulse Input SR
	Field Bus STF Series.....211 NEW	DC Input Field Bus STF
	DC Input Controller Type ST Series220	DC Input With Controller ST
Three Phase Stepper Drive	AC Input235	3-Phase Stepper Drive AC Input
	DC Input237	3-Phase Stepper Drive DC Input
Stepper Motor	Two Phase248	Stepper Motor 2-Phase
	Three Phase282	Stepper Motor 3-Phase
	UL.....287	Stepper Motor UL
Accessories	Power Supplies.....302	Accessories Power Supplies
	Cables.....303	Accessories Cables
Appendix	Software.....305	Appendix Software
	Glossary311	Appendix Glossary

Integrated Stepper Motor



	Efficient Integrated TSM	Integrated SSM	IP65 Integrated TXM	Motor & Drive RS	Motor & Drive SS			
	Step-Servo							
	Pulse Input STM-R							
	With Controller STM							
	IP65 With Controller SWM	Integrated Stepper Motor						
	Pulse Input SRAC	With Controller STAC	Pulse Input SR	Field Bus STF	With Controller ST			
	AC Input		DC Input					
	2-Phase Stepper Drive							
	3-Phase Stepper Drive							
	2-Phase		3-Phase		UL			
	Stepper Motor							
	Accessories							
	Power Supplies		Cables		Software			
	Appendix							
Glossary								


Integrated Stepper Motor

The Integrated Stepper Motor is an integrated Drive+Motor, fusing step motor and drive technologies into a single device, offering savings on space, wiring and cost over conventional motor and drive solutions.

Anti-Resonance

Step motor systems have a natural tendency to resonate at certain speeds. The STM integrated motors automatically calculate the system's natural frequency and apply damping to the control algorithm. This greatly improves midrange stability, allows higher speeds and greater torque utilization, and also improves settling times.


Provides better motor performance and higher speeds



Microstep Emulation

With Microstep Emulation, low resolution systems can still provide smooth motion. The drive can take low resolution step pulses and create fine resolution motion.


Delivers smoother motion in any application



Torque Ripple Smoothing

All step motors have an inherent low speed torque ripple that can affect the motion profile of the motor. By analyzing this torque ripple the system can apply a negative harmonic to counter this effect. This gives the motor much smoother motion at low speed.

Produces smoother motion at lower speeds



Command Signal Smoothing

Command Signal smoothing can soften the effect of immediate changes in velocity and direction, making the motion of the motor less jerky. An added advantage is that it can reduce the wear on mechanical components.

Improves smoother system performance




Dynamic Current Control for STM and SWM

Allows for three current settings to help the motor run cooler and reduce power consumption.

- Running Current - the current the drive will deliver for continuous motion.
- Accel/Decel Current - the current the drive will deliver when accelerating or decelerating.
- Idle Current - reduces current draw when motor is stationary.

System runs cooler

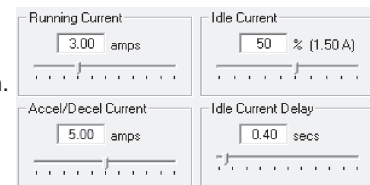

Stall Detection & Stall Prevention for STM and SWM


The optional encoder detects the rotor's position to provide Stall Detection and Stall Prevention functions.

Stall Detection notifies the system as soon as the required torque is too great for the motor, resulting in a loss of synchronization between the rotor and stator, also known as stalling. As soon as the motor stalls the drive triggers its fault output.

Stall Prevention automatically adjusts the excitation of the motor windings to maintain synchronization of the rotor and stator under all conditions. This means that motor position is maintained and corrected even when the required torque is too great for the motor. The stall prevention feature also performs position maintenance, which maintains the position of the motor shaft when at rest.

■ STM-R Control Options

Step & Direction

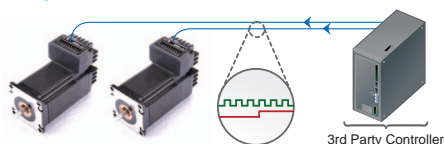


R

- Step & Direction
- CW & CCW pulse

■ STM&SWM Control Options


Step & Direction

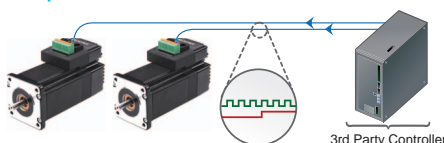

S

- Step & Direction
- CW & CCW pulse
- A/B quadrature (encoder following)


Oscillator / Run-Stop

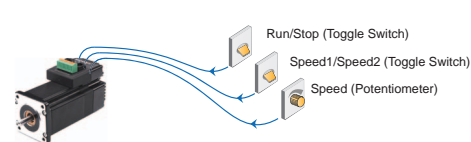

S

- Software Configuration
- Two Speeds
- Vary speed with analog input
- Joystick compatible

Host Control

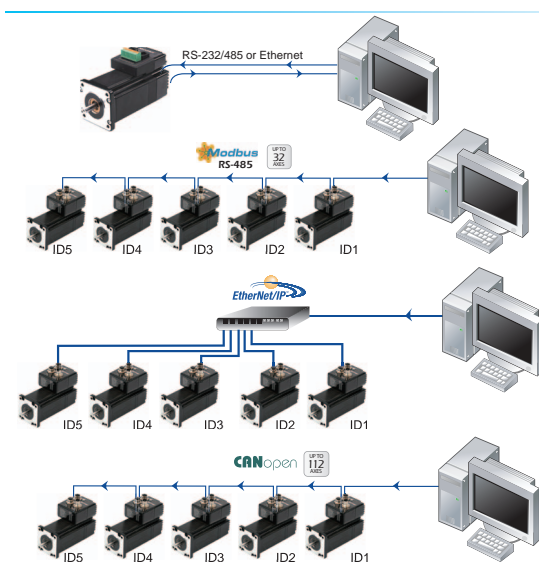

S

&

Q

- RS-232
- Accepts commands from host PC or PLC
- RS-485
- Accepts commands from host PC or PLC
 - Multi-axis capable, up to 32 axes

Q

&


IP

- Accepts commands from host PC or PLC
- 1000's of axes with Ethernet and EtherNet/IP

C

- CANopen Model
- Connect to CANopen network
 - CiA301 and CiA402 protocols
 - Multi axle bus, up to 112 axis

Stand Alone Programmable

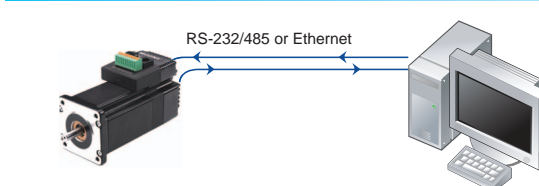


Q

&

IP

- Comprehensive text based language
- Download, store & execute programs
- High level features: multi-tasking, conditional programming and math functions
- Host interface while executing stored programs

PC Based Software

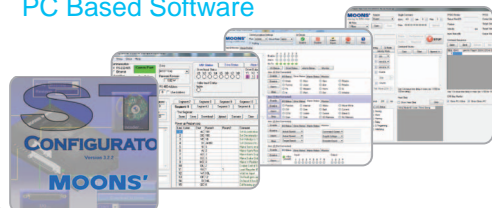


MOONS' STM and SWM products support following software application make it easy to configure, testing and evaluation.

- ST Configurator
- Q Programmer
- RS-485 Bus Utility
- CANopen Test Tool

Efficient Integrated TSM	IP65 Integrated TXM	Motor & Drive RS	Motor & Drive SS	Integrated Stepper Motor STM-R	AC Input SRAC	2-Phase Stepper Drive STAC	DC Input SR	Field Bus STF	With Controller ST	3-Phase Stepper Drive AC Input	DC Input	2-Phase Stepper Motor	3-Phase	UL	Power Supplies	Cables	Software	Glossary
--------------------------	---------------------	------------------	------------------	--------------------------------	---------------	----------------------------	-------------	---------------	--------------------	--------------------------------	----------	-----------------------	---------	----	----------------	--------	----------	----------

Overview of Integrated Stepper Motor

STM-R Series - Pluse Input Type Integrated Stepper Motor

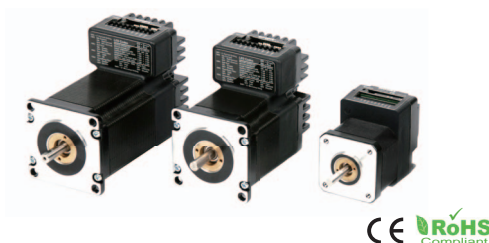

Frame Size: 42mm, 56mm

Input Voltage(Typical): STM17R: 12-48VDC STM23R: 12-70VDC

Encoder Option: Incremental 4000 counts/rev

Microstep Resolution: Switch set, up to 25600 steps/rev

Control Modes:

- Pulse Control

Inputs and Output:

- 3 Digital Inputs, 1 Digital Output

Position
Control

STM Series - Controller Type Integrated Stepper Motor



Frame Size: 28mm, 42mm, 56mm, 60mm

Input Voltage(Typical):

- STM11 - 24VDC
- STM17 - 12-48VDC
- STM23/24 - 12-70VDC

Encoder Option: Incremental 4000 counts/rev

- Stall Detection
- Stall Prevention

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control
- Stand alone operation

Inputs and Outputs:

- STM11 4 digital Inputs, 2 Outputs
- SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- C Type- 3 Digital Inputs, 1 Digital Output

Communication:



Position
Control

Velocity
Control

SWM Series - IP65 Type Integrated Stepper Motor



Frame Size: 60mm

Input Voltage(Typical): 12-70VDC

Encoder Option: Incremental 4000 counts/rev

- Stall Detection
- Stall Prevention

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control(Daisy Chain for RS-485 and CANopen)
- Stand alone operation

Inputs and Outputs:





- SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input

Communication:



Position
Control

Velocity
Control

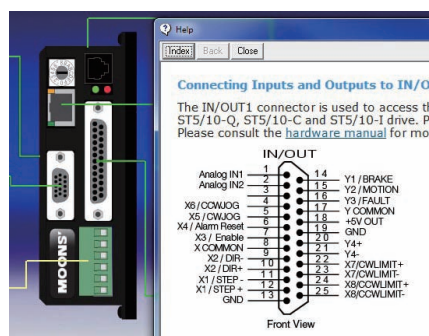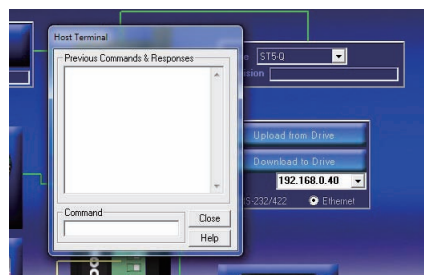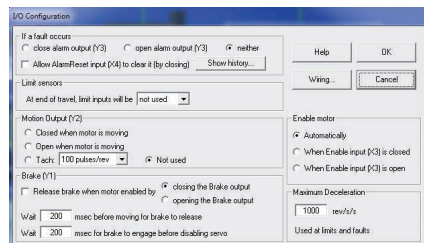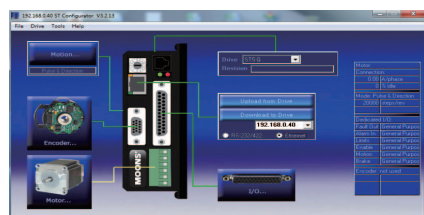

Software Features

- Intuitive interface
- Drive status and alarm monitoring
- Self-test function to test drive/motor operation
- Built-in SCL Terminal
- Online help integrated
- Supports all STM and SWM integrated steppers

About this software

The ST Configurator software makes setting up, configuring and programming STM integrated stepper a snap. All motor, I/O, encoder and motion control parameters are available to the user through an intuitive interface. The ST Configurator provides seamless communication with all models whether they have RS-232, RS-485, CANopen or Ethernet communications. It also includes a built-in Q Programmer so you can switch context quickly and easily.

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.





FREE DOWNLOAD

Our software and user manuals can be downloaded from our website:

www.moonsindustries.com

Step-Servo	Efficient Integrated TSM
	Integrated SSM
	IP65 Integrated TXM
	Motor & Drive RS
Integrated Stepper Motor	Motor & Drive SS
	Pulse Input STM-R
	With Controller With Controller STM
	IP65 With Controller With Controller SWM
2-Phase Stepper Drive	AC Input SRAC
	With Controller With Controller STAC
	Pulse Input SR
	Field Bus STF
3-Phase Stepper Drive	DC Input ST
	With Controller With Controller ST
	AC Input
	DC Input
Stepper Motor	2-Phase
	3-Phase
	UL
	Power Supplies
Accessories	Cables
Appendix	Software
	Glossary

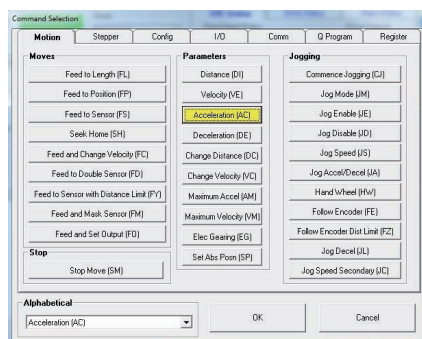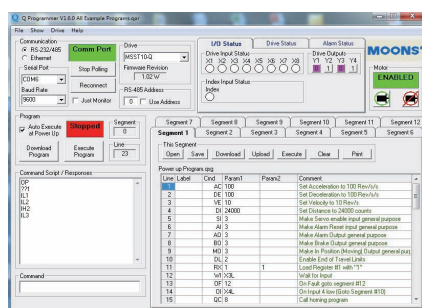

Software Features

- Single-axis motion control
- Stored program execution
- Multi-tasking
- Conditional processing
- Math functions
- Data registers
- Motion Profile simulation
- Online help integrated
- Support all Q/C/IP Types Integrated Motors in STM/SWM Series

About this software

Q Programmer is a single-axis motion control software for programmable stepper and servo drives from MOONS'. The software allows users to create sophisticated and functional programs that Q and Plus drives can run stand-alone. The commands available in the Q programming environment consist of commands for controlling motion, inputs & outputs, drive configuration and status, as well as math operations, register manipulation, and multi-tasking.

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.





FREE DOWNLOAD

Our software and user manuals can be downloaded from our website:

www.moonsindustries.com

RS-485 Bus Utility

Software

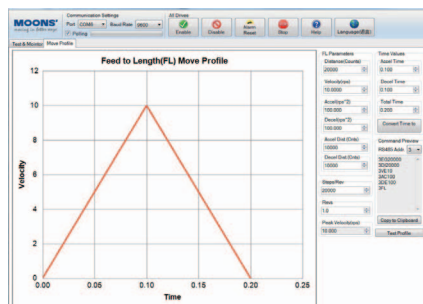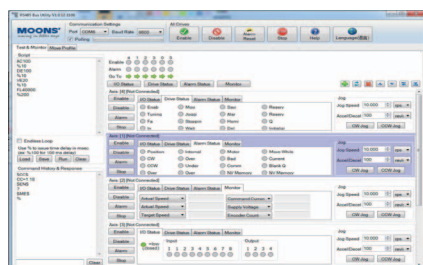

Software Features

- Stream SCL commands from the command line
- Simple interface with powerful capability
- Easy setup with RS-485 for 32 axis network motion control
- Monitoring Status of I/O, drive, alarm and the other nine most useful motion parameters
- Write and save SCL command scripts
- Online help integrated
- Supports all RS-485 drives


About this software

If you plan to stream serial commands to MOONS' drive using the Serial Command Language (SCL), to build an RS-485 multi-axis network, you'll need a simple terminal emulator to get familiar with and test your command strings and test the network. RS-485 Bus Utility is the ideal choice because it sends command strings as a packet, with minimal delay between characters, and properly terminated with a carriage return. Other terminal applications send each character as it's typed, making them difficult to use with SCL commands.

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.

CANopen Test Tool

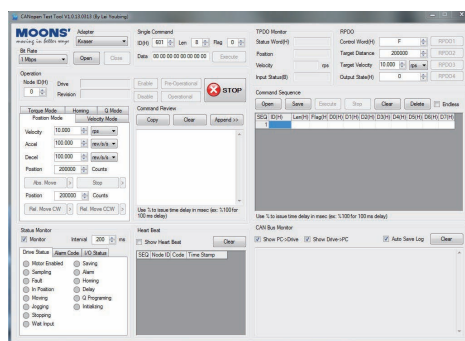

Software Features

- Friendly User Interface
- Multiple operation Mode Support
- Multi-Thread, High Performance
- CAN bus monitor and log function
- Kvaser/PEAK/ZLG adapter support

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.




FREE DOWNLOAD

Our software and user manuals can be downloaded from our website:

www.moonsindustries.com

Efficient Integrated TSM	Integrated Stepper Motor
Integrated SSM	Motor & Drive
IP65 Integrated TXM	Motor & Drive
RS	Motor & Drive
SS	Motor & Drive
Integrated STM-R	Pulse Input
STM	With Controller
SWM	With Controller
AC Input	AC Input
SRAC	With Controller
STAC	With Controller
SR	Pulse Input
Field Bus	Field Bus
STF	With Controller
ST	With Controller
3-Phase Stepper Drive	3-Phase Stepper Drive
AC Input	AC Input
DC Input	DC Input
2-Phase	2-Phase
3-Phase	3-Phase
UL	UL
Power Supplies	Power Supplies
Cables	Cables
Software	Software
Glossary	Glossary

Controller Type Integrated Stepper Motor - STM Series

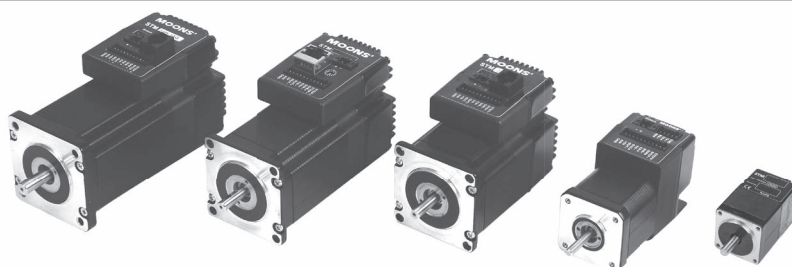

Drive + **Motor** + **Controller**

The STM is an integrated Drive+Motor+Controller, fusing step motor and drive technologies into a single device, offering savings on space, wiring and cost over conventional motor and drive solutions.


- ✓ Dynamic Current Control
- ✓ Anti-Resonance
- ✓ Torque Ripple Smoothing
- ✓ Microstep Emulation
- ✓ Stall Detection and Stall Prevention

■ Features

Anti-Resonance

Step motor systems have a natural tendency to resonate at certain speeds. The STM integrated motors automatically calculate the system's natural frequency and apply damping to the control algorithm. This greatly improves midrange stability, allows higher speeds and greater torque utilization, and also improves settling times.


Provides better motor performance and higher speeds



Microstep Emulation

With Microstep Emulation, low resolution systems can still provide smooth motion. The drive can take low resolution step pulses and create fine resolution motion.


Delivers smoother motion in any application



Torque Ripple Smoothing

All step motors have an inherent low speed torque ripple that can affect the motion profile of the motor. By analyzing this torque ripple the system can apply a negative harmonic to counter this effect. This gives the motor much smoother motion at low speed.

Produces smoother motion at lower speeds



Command Signal Smoothing

Command Signal smoothing can soften the effect of immediate changes in velocity and direction, making the motion of the motor less jerky. An added advantage is that it can reduce the wear on mechanical components.

Improves smoother system performance




Dynamic Current Control

Allows for three current settings to help the motor run cooler and reduce power consumption.

- Running Current - the current the drive will deliver for continuous motion.
- Accel Current - the current the drive will deliver when accelerating or decelerating.
- Idle Current - reduces current draw when motor is stationary.

System runs cooler

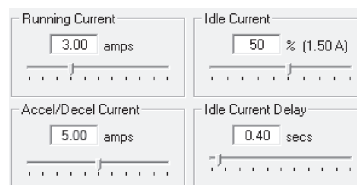


Stall Detection & Stall Prevention

The optional encoder detects the rotor's position to provide Stall Detection and Stall Prevention functions.

Control Options


Step & Direction

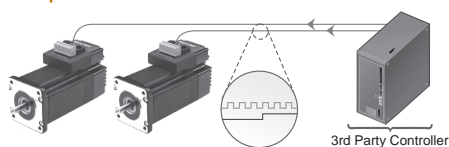

S

- Step & Direction
- CW & CCW pulse
- A/B quadrature (encoder following)


Oscillator / Run-Stop

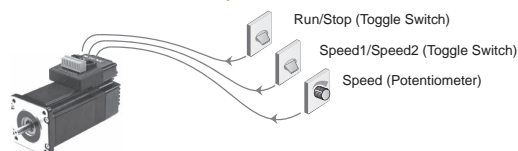

S

- Software Configuration
- Two Speeds
- Vary speed with analog input
- Joystick compatible

Host Control

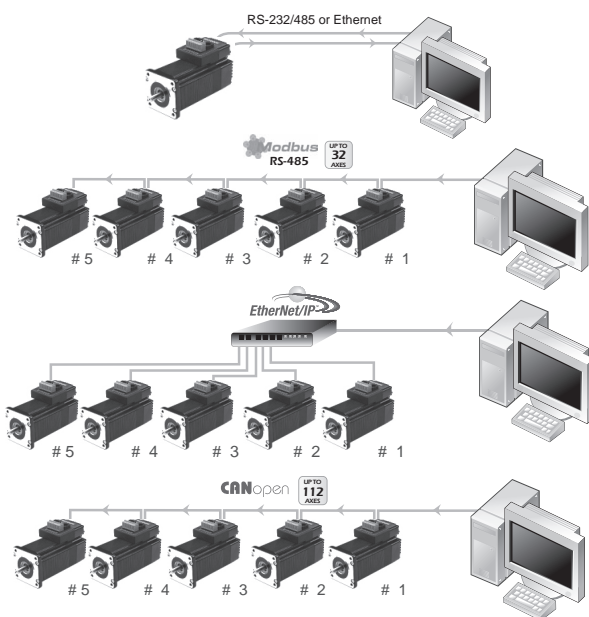

S

& Q

RS-232

- Accepts commands from host PC or PLC RS-485 or Modbus/RTU network
- Accepts commands from host PC or PLC
- Multi-axis capable, up to 32 axes

Q

& IP


- Accepts commands from host PC or PLC
- 1000's of axes with Ethernet and Ethernet/IP

C

CANopen Model

- Connect to CANopen network
- CiA301 and CiA402 protocols
- Multi axle bus, up to 112 axis

Stand Alone Programmable

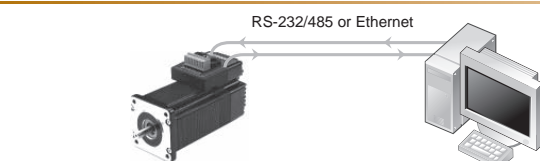

Q

& IP

- Comprehensive text based language
- Download, store & execute programs
- High level features: multi-tasking, conditional programming and math functions
- Host interface while executing stored programs

Efficient Integrated TSM

Integrated SSM

Step-Servo IP65 Integrated TXM

Motor & Drive RS

Motor & Drive SS

Integrated Stepper Motor STM-R

IP65 Integrated STM

IP65 Integrated SWM

AC Input SRAC

2-Phase Stepper Drive STAC

DC Input SR

Field Bus STF

With Controller ST

3-Phase Stepper Drive AC Input

DC Input

2-Phase Stepper Drive

3-Phase Stepper Drive

UL

Power Supplies


Cables

Software


Glossary

STM11 - Controller Type Integrated Stepper Motor

■ Specifications


Power Amplifier		 CE RoHS
Amplifier Type	Dual H-Bridge, 4 Quadrant	
Current Control	4 state PWM at 20 KHz	
Output Torque	STM11□-1RE: Up to 50mN·m STM11□-2RE: Up to 80mN·m STM11□-3RE: Up to 100mN·m	
Power Supply	24V volt power supply required	
Input Voltage Range	15 - 30V volt, min/max (rate 24VDC)	
Protection	Over-voltage, under-voltage, over-temp, internal motor shorts (phase-to-phase, phase-to-ground)	
Controller		
Microstep Resolution	Software selectable from 200 to 51200 steps/rev in increments of 2 steps/rev	
Encoder Feedback	Optional 4000 counts/rev encoder feedback	
Speed Range	Speeds up to 3000 rpm	
Non-Volatile Storage	Configurations are saved in FLASH memory on-board the DSP	
Digital Input X1/Pluse	Input: 5 - 24 VDC, single-ended signals, max. pulse frequency 1 MHz Functions: Step, CW Step, A Quadrature, CW Limit, CW Jog, Run/Stop, general purpose input; adjustable bandwidth digital noise rejection filter Connect with NPN type output ONLY	
Digital Input X2/DIR	Input: 5 - 24 VDC, single-ended signals, max. pulse frequency 1 MHz Functions: Dir, CCW Step, B Quadrature, CCW Limit, CCW Jog, general purpose input; adjustable bandwidth digital noise rejection filter Connect with NPN type output ONLY	
Digital Input X3/Enable	Inputs: 5 - 24 VDC, single-ended signals, max. pulse frequency 1 MHz Functions: Enable, Change speed, general purpose input Connect with NPN type output ONLY	
Digital X4/Alarm Clear	Inputs: 5 - 24 VDC, single-ended signals, max. pulse frequency 1 MHz Functions: Alarm reset; general purpose input Connect with NPN type output ONLY	
Digital Output Y1	Open drain output, maximum current 100mA with maximum voltage of 30VDC Functions: Fault detection, general purpose	
Digital Output Y2	Open drain output, maximum current 100mA with maximum voltage of 30VDC Functions: Brake, Moving, Tach Output, general purpose	
Communication	RS-422/485	
Physical		
Ambient Temperature	0 - 40 °C (32 -104°F)when mounted to a suitable heat sink	
Humidity	90% non-condensing	
Mass	STM11□-1RE: 118 g STM11□-2RE: 168 g STM11□-3RE: 218 g	
Rotor Inertia	STM11□-1RE: 9 g.cm ² STM11□-2RE: 12 g.cm ² STM11□-3RE: 18 g.cm ²	

Connector Pin-out

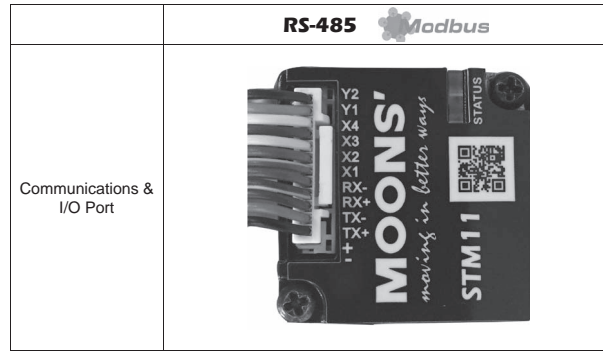


Dimensions (Unit: mm)


Visit www.moonsindustries.com to get the 3D drawing.

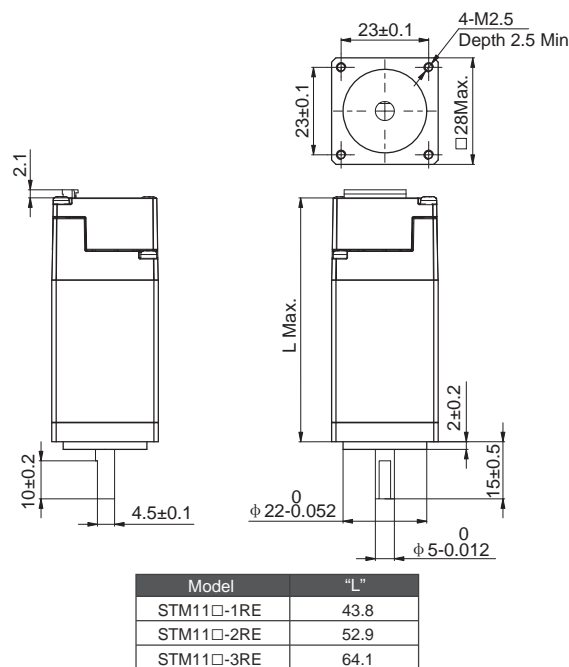

Torque Curves

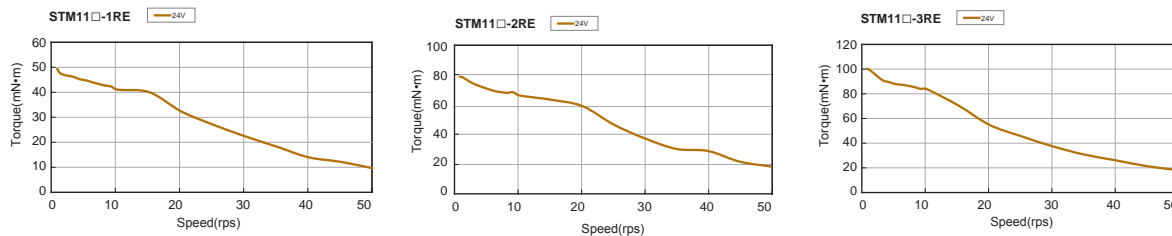

■ Numbering System

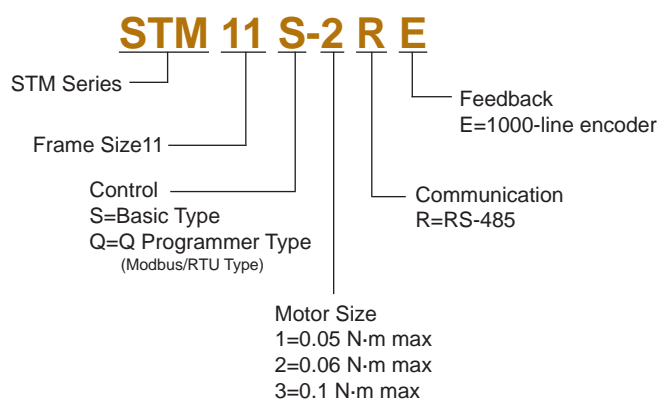


■ Ordering Information

Model	Control	Output Torque	Encoder	RS-485	Modbus/RTU
STM11S-1RE	S	0.05N·m	✓	✓	
STM11S-2RE		0.08N·m	✓	✓	
STM11S-3RE		0.1N·m	✓	✓	
STM11Q-1RE	Q	0.05N·m	✓	✓	✓
STM11Q-2RE		0.08N·m	✓	✓	✓
STM11Q-3RE		0.1N·m	✓	✓	✓



STM17 - Controller Type Integrated Stepper Motor

■ Specifications

Power Amplifier		 CE RoHS
Amplifier Type	Dual H-Bridge, 4 Quadrant	
Current Control	4 state PWM at 20 KHz	
Output Torque	STM17□-1□□: Up to 0.23N·m STM17□-2□□: Up to 0.38N·m STM17□-3□□: Up to 0.48N·m	
Power Supply	External 12 - 48 volt power supply required	
Protection	Over-voltage, under-voltage, over-temp, internal motor shorts (phase-to-phase, phase-to-ground)	
Controller		
Microstep Resolution	Software selectable from 200 to 51200 steps/rev in increments of 2 steps/rev	
Encoder Feedback	Optional 4000 counts/rev encoder feedback	
Speed Range	Speeds up to 3000 rpm	
Non-Volatile Storage	Configurations are saved in FLASH memory on-board the DSP	
Modes of Operation	STM17S: Step & direction, CW/CCW pulse, A/B quadrature pulse, velocity (oscillator, joystick), streaming commands(SCL) STM17Q: All STM17S modes of operation plus stored Q program execution STM17C: CANopen slave node plus stored Q Program execution	
Digital Input	S/Q type: Adjustable bandwidth digital noise rejection filter on all inputs STEP+/-: Optically isolated, 5-24 volts, minimum pulse width 250 ns., maximum pulse frequency 2 MHz Function: Step, CW step, A quadrature (encoder following), CW limit, CW jog, start/stop (oscillator mode), or general purpose input DIR+/-: Optically isolated, 5-24 volt. Minimum pulse width = 250 ns, Maximum pulse frequency = 2 MHz Function: Direction, CCW step, B quadrature (encoder following), CCW limit, CCW jog, direction (oscillator mode), or general purpose input EN+/-: Optically isolated, 5-24 volt. Minimum pulse width = 100 μs, Maximum pulse frequency = 10 KHz Function: Enable, alarm/fault reset, speed 1/speed 2 (oscillator mode), or general purpose input C type: Adjustable bandwidth digital noise rejection filter on all inputs IN1+/-: Optically isolated, 5-24 volt. Minimum pulse width = 250 ns, Maximum pulse frequency = 2 MHz Function: CW limit, CW jog, or general purpose input IN2+/-: Optically isolated, 5-24 volt. Minimum pulse width = 250 ns, Maximum pulse frequency = 2 MHz Function: CCW limit, CCW jog, or general purpose input IN3+/-: Optically isolated, 5-24 volt. Minimum pulse width = 100 μs, Maximum pulse frequency = 10 KHz Function: general purpose input	
Digital Output	OUT+/-: Optically isolated, 30V/100 mA max. Functions: Fault, brake, motion, tach, and general purpose programmable	
Analog Input	AIN referenced to GND. Range = 0 to 5 VDC. Resolution = 12 bits.	
Communication	S type: RS-232, RS-485 Q type: RS-232, RS-485 or Modbus/RTU C type: CANOpen, RS-232	
Physical		
Ambient Temperature	0 - 40°C (32 - 104°F) when mounted to a suitable heat sink	
Humidity	90% non-condensing	
Mass	STM17□-1□□: 280 g STM17□-2□□: 360 g STM17□-3□□: 440 g	
Rotor Inertia	STM17□-1□□: 38 g·cm ² STM17□-2□□: 57 g·cm ² STM17□-3□□: 82 g·cm ²	


Efficient Integrated TSM	Step-Servo
Integrated SSM	
IP65 Integrated TXM	
Motor & Drive RS	
Motor & Drive SS	
Pulse Input With Controller STM-R	Integrated Stepper Motor
IP65 Pulse Input With Controller SWM	
AC Input SRAC	
With Controller STAC	
Pulse Input SR	
Field Bus STF	
With Controller ST	
DC Input	
3-Phase Stepper Drive	
AC Input	
DC Input	
2-Phase Stepper Drive	
3-Phase Stepper Drive	
Stepper Motor	
UL	
Power Supplies	
Cables	
Software	
Glossary	
Appendix	

Connector Pin-out


	RS232	RS485 	CANopen
Communications Port	RXD +5V TXD GND GND	GND TX- TX+ RX- RX+	
I/O Port	STEP+ STEP- DIR+ DIR- EN+ EN- OUT+ OUT- +5V AIN GND	STEP+ STEP- DIR+ DIR- EN+ EN- OUT+ OUT- +5V AIN GND	IN1+ IN1- IN2+ IN2- IN3+ IN3- OUT+ OUT- +5V AIN GND

Dimensions(Unit:mm)


Visit www.moonsindustries.com to get the 3D drawing.

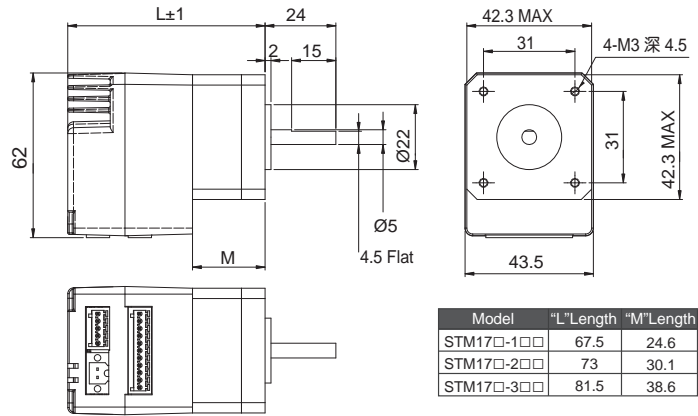

Torque Curves

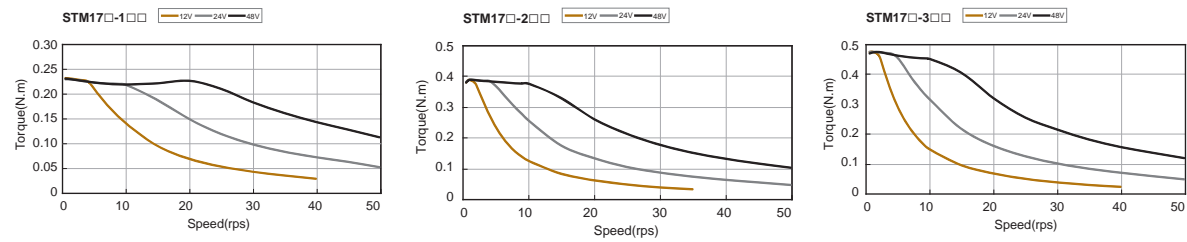

■ Numbering System

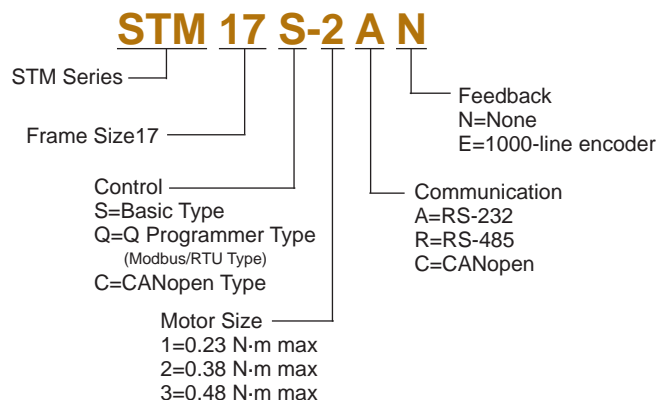


■ Ordering Information

Model	Control	Output Torque	Encoder	RS-232	RS-485	Modbus/RTU	CANopen
STM17S-1AN	S	0.23N·m		✓			
STM17S-1RN					✓		
STM17S-1AE			✓	✓			
STM17S-1RE			✓		✓		
STM17S-2AN		0.38N·m		✓			
STM17S-2RN					✓		
STM17S-2AE			✓	✓	✓		
STM17S-2RE			✓		✓		
STM17S-3AN		0.48N·m		✓			
STM17S-3RN					✓		
STM17S-3AE			✓	✓			
STM17S-3RE			✓		✓		
STM17Q-1AN	Q	0.23N·m		✓			
STM17Q-1RN					✓	✓	
STM17Q-1AE			✓	✓			
STM17Q-1RE			✓		✓	✓	
STM17Q-2AN		0.38N·m		✓			
STM17Q-2RN					✓	✓	
STM17Q-2AE			✓	✓			
STM17Q-2RE			✓		✓	✓	
STM17Q-3AN		0.48N·m		✓			
STM17Q-3RN					✓	✓	
STM17Q-3AE			✓	✓			
STM17Q-3RE			✓		✓	✓	
STM17C-1CN	C	0.23N·m		✓			✓
STM17C-1CE			✓	✓			✓
STM17C-2CN		0.38N·m		✓			✓
STM17C-2CE			✓	✓			✓
STM17C-3CN		0.48N·m		✓			✓
STM17C-3CE			✓	✓			✓










Efficient Integrated TSM	IP65 Integrated TXM	Motor & Drive RS	Motor & Drive SS	Pulse Input STM-R	With Controller With Controller SWM	Pulse Input SRAC	With Controller With Controller STAC	Pulse Input SR	Field Bus STF	With Controller With Controller ST	AC Input	DC Input	2-Phase Stepper Drive	3-Phase Stepper Drive	Stepper Motor	UL	Power Supplies	Cables	Software	Glossary
--------------------------	---------------------	------------------	------------------	-------------------	-------------------------------------	------------------	--------------------------------------	----------------	---------------	------------------------------------	----------	----------	-----------------------	-----------------------	---------------	----	----------------	--------	----------	----------

STM23 - Controller Type Integrated Stepper Motor

■ Specifications





Power Amplifier		 CE RoHS
Amplifier Type	Dual H-Bridge, 4 Quadrant	
Current Control	4 state PWM at 20 KHz	
Output Torque	STM23□-2□□: Up to 1.0N·m STM23□-3□□: Up to 1.5N·m	
Power Supply	External 12 - 70 volt power supply required	
Protection	Over-voltage, under-voltage, over-temp, internal motor shorts (phase-to-phase, phase-to-ground)	
Controller		
Microstep Resolution	Software selectable from 200 to 51200 steps/rev in increments of 2 steps/rev	
Encoder Feedback	Optional 4000 counts/rev encoder feedback	
Speed Range	Speeds up to 3000 rpm	
Non-Volatile Storage	Configurations are saved in FLASH memory on-board the DSP	
Modes of Operation	STM23S: Step & direction, CW/CCW pulse, A/B quadrature pulse, velocity (oscillator, joystick), streaming commands (SCL) STM23Q: All STM23S modes of operation plus stored Q program execution STM23C: CANopen slave node plus stored Q program execution STM23IP: All STM23Q modes of operation plus EtherNet/IP industrial network communications	
Digital Input	S/Q/IP type: Adjustable bandwidth digital noise rejection filter on all inputs STEP+/-: optically isolated, 5-24 volts, minimum pulse width 250 ns., maximum pulse frequency 2 MHz Function: Step, CW step, A quadrature (encoder following), CW limit, CW jog, start/stop (oscillator mode), or general purpose input DIR+/-: Optically isolated, 5-24 volt. Minimum pulse width = 250 ns, Maximum pulse frequency = 2 MHz Function: Direction, CCW step, B quadrature (encoder following), CCW limit, CCW jog, direction (oscillator mode), or general purpose input EN+/-: Optically isolated, 5-24 volt. Minimum pulse width = 100 μs, Maximum pulse frequency = 10 KHz Function: Enable, alarm/fault reset, speed 1/speed 2 (oscillator mode), or general purpose input C type: Adjustable bandwidth digital noise rejection filter on all inputs IN1+/-: Optically isolated, 5-24 volt. Minimum pulse width = 250 ns, Maximum pulse frequency = 2 MHz Function: CW limit, CW jog, or general purpose input IN2+/-: Optically isolated, 5-24 volt. Minimum pulse width = 250 ns, Maximum pulse frequency = 2 MHz Function: CCW limit, CCW jog, or general purpose input IN3+/-: Optically isolated, 5-24 volt. Minimum pulse width = 100 μs, Maximum pulse frequency = 10 KHz Function: general purpose input	
Digital Output	OUT+/-: Optically isolated, 30V/100 mA max. Functions: Fault, brake, motion, tach, and general purpose programmable	
Analog Input	AIN referenced to GND. Range = 0 to 5 VDC. Resolution = 12 bits.	
Communication	S type: RS-232, RS-485 or Ethernet Q type: RS-232, RS-485, Ethernet or Modbus/RTU C type: CANOpen, RS-232 IP type: EtherNet/IP	
Physical		
Ambient Temperature	0 - 40°C (32 - 104°F) when mounted to a suitable heat sink	
Humidity	90% non-condensing	
Mass	STM23□-2□□: 850 g STM23□-3□□: 1200 g	
Rotor Inertia	STM23□-2□□: 260 g·cm ² STM23□-3□□: 460 g·cm ²	

Connector Pin-out



	RS232	RS485 	CANopen	Ethernet
Communications Port	 GND TX RX RJ11	 GND TX- TX+ RX- RX+ GND	 TXD RXD CAN_H CAN_L GND	 RJ45
I/O Port	 STEP+ STEP- DIR+ DIR- EN+ EN- OUT+ OUT- +5V AIN GND	 STEP+ STEP- DIR+ DIR- EN+ EN- OUT+ OUT- +5V AIN GND	 IN1+ IN1- IN2+ IN2- IN3+ IN3- OUT+ OUT- +5V AIN GND	 STEP+ STEP- DIR+ DIR- EN+ EN- OUT+ OUT- +5V AIN GND

Dimensions(Unit:mm)


Visit www.moonsindustries.com to get the 3D drawing.

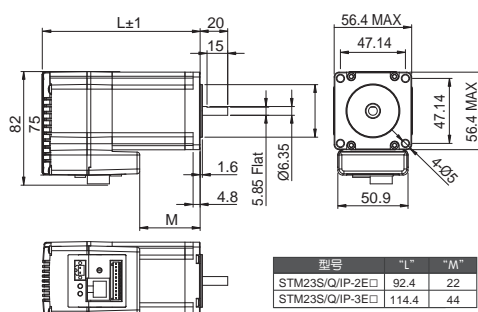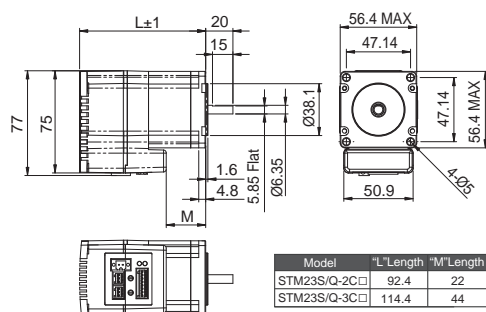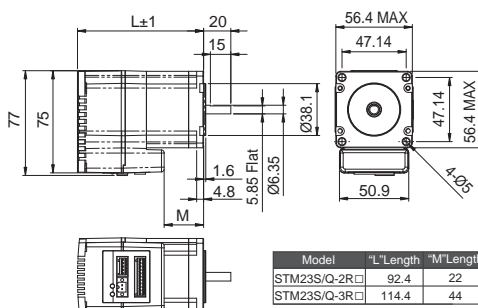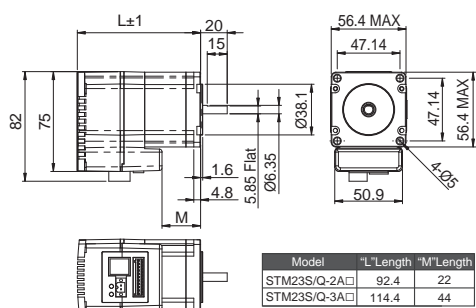

Torque Curves

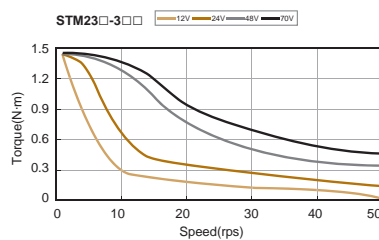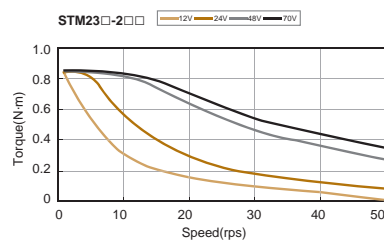

■ Numbering System

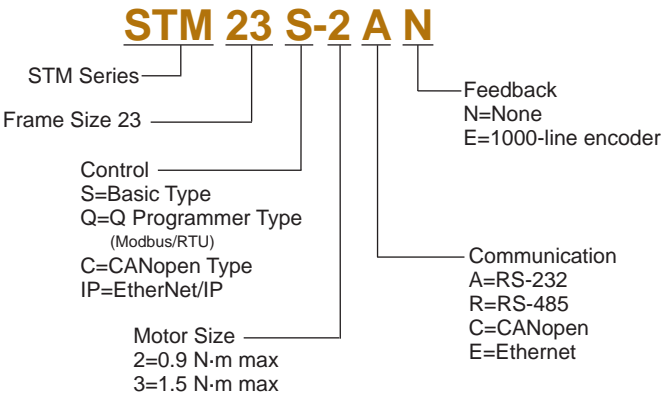


■ Ordering Information

Model	Control	Output Torque	Encoder	RS-232	RS-485	Modbus/RTU	CANopen	Ethernet	EtherNet/IP
STM23S-2AN	S	0.9N·m		✓					
STM23S-2RN					✓				
STM23S-2EN								✓	
STM23S-2AE			✓	✓					
STM23S-2RE			✓		✓				
STM23S-2EE			✓					✓	
STM23S-3AN	S	1.5N·m		✓					
STM23S-3RN					✓				
STM23S-3EN								✓	
STM23S-3AE			✓	✓					
STM23S-3RE			✓		✓				
STM23S-3EE			✓					✓	
STM23Q-2AN	Q	0.9N·m		✓					
STM23Q-2RN					✓	✓			
STM23Q-2EN								✓	
STM23Q-2AE			✓	✓					
STM23Q-2RE			✓		✓	✓			
STM23Q-2EE			✓					✓	
STM23Q-3AN		1.5N·m		✓					
STM23Q-3RN					✓	✓			
STM23Q-3EN								✓	
STM23Q-3AE			✓	✓					
STM23Q-3RE			✓		✓	✓			
STM23Q-3EE			✓					✓	
STM23C-2CN	C	0.9N·m		✓			✓		
STM23C-2CE			✓	✓			✓		
STM23C-3CN		1.5N·m		✓			✓		
STM23C-3CE			✓	✓			✓		
STM23IP-2EN	IP	0.9N·m							✓
STM23IP-2EE			✓						✓
STM23IP-3EN		1.5N·m							✓
STM23IP-3EE			✓						✓










STM24 - Controller Type Integrated Stepper Motor

■ Specifications

Power Amplifier		 CE RoHS
Amplifier Type	Dual H-Bridge, 4 Quadrant	
Current Control	4 state PWM at 20 KHz	
Output Torque	STM24□-3□□: Up to 2.4N·m	
Power Supply	External 12 - 70 volt power supply required	
Protection	Over-voltage, under-voltage, over-temp, internal motor shorts (phase-to-phase, phase-to-ground)	
Controller		
Microstep Resolution	Software selectable from 200 to 51200 steps/rev in increments of 2 steps/rev	
Encoder Feedback	Optional 4000 counts/rev encoder feedback	
Speed Range	Speeds up to 3000 rpm	
Non-Volatile Storage	Configurations are saved in FLASH memory on-board the DSP	
Modes of Operation	STM24S: Step & direction, CW/CCW pulse, A/B quadrature pulse, velocity (oscillator, joystick), streaming commands(SCL) STM24Q: All STM24S modes of operation plus stored Q program execution STM24C: CANopen slave node plus stored Q Program execution STM24IP: All STM24Q modes of operation plus EtherNet/IP industrial network communications	
Flex I/O RS-232 and RS-485 models	Adjustable bandwidth digital noise rejection filter on all flex I/O points configured as inputs I/O1+/- : When configured as input, optically isolated, 5-24 volt. Minimum pulse width = 250 ns. Maximum pulse frequency = 2 MHz. Function: Step, CW step, A quadrature (encoder following), CW jog, start/stop (oscillator mode), Enable or general purpose input. When configured as output, optically isolated, 30V/100 mA max. Function: Fault, brake motion, tach, or general purpose programmable. I/O2+/- : When configured as input, optically isolated, 5-24 volt. Minimum pulse width = 250 ns. Maximum pulse frequency = 2 MHz. Function: Direction, CCW step, B quadrature (encoder following), CW jog, direction (oscillator mode), alarm/ fault reset or general purpose input. When configured as output, optically isolated, 30V/100 mA max. Function: Fault, brake motion, tach, or general purpose programmable. I/O3+/- : When configured as input, optically isolated, 5-24 volt. Minimum pulse width = 100 μs. Maximum pulse frequency = 10 KHz. Function: CW limit, Enable, Speed 1/Speed 2 (oscillator mode) or general purpose input. When configured as output, optically isolated, 30V/100 mA max. Function: Fault, brake motion, tach, or general purpose programmable. I/O4+/- : When configured as input, optically isolated, 5-24 volt. Minimum pulse width = 100 μs. Maximum pulse frequency = 10 KHz. Function: CCW limit, alarm/fault reset or general purpose input. When configured as output, optically isolated, 30V/100 mA max. Function: Fault, brake motion, tach, or general purpose programmable.	
Digital Input Ethernet models	Adjustable bandwidth digital noise rejection filter on all inputs STEP+/- : Optically isolated, 5-24 volt. Minimum pulse width 250 ns. Maximum pulse frequency = 2MHz Function: Step, CW step, A quadrature (encoder following), CW limit, CW jog, start/stop (oscillator mode), or general purpose input. DIR+/- : Optically isolated, 5-24 volt. Minimum pulse width = 250 ns. Maximum pulse frequency = 2 MHz. Function: Direction, CCW step, B quadrature (encoder following), CW limit, CW jog, direction (oscillator mode), or general purpose input. EN+/- : Optically isolated, 5-24 volt. Minimum pulse width = 100 μs. Maximum pulse frequency = 10 KHz. Function: Enable, alarm/fault reset, speed 1/speed 2 (oscillator mode), or general purpose input	
Digital Input CANopen models	Adjustable bandwidth digital noise rejection filter on all inputs IN1+/- : Optically isolated, 5-24 volt. Minimum pulse width = 250 ns. Maximum pulse frequency = 2 MHz. Function: CW limit, CW jog, or general purpose input IN2+/- : Optically isolated, 5-24 volt. Minimum pulse width = 250 ns. Maximum pulse frequency = 2 MHz. Function: CCW limit, CCW jog, or general purpose input IN3+/- : Optically isolated, 5-24 volt. Minimum pulse width = 100 μs. Maximum pulse frequency = 10 KHz. Function: general purpose input	
Digital Output	OUT+/- : Optically isolated, 30V/100 mA max. Functions: Fault, brake, motion, tach, or general purpose programmable	
Analog Input	AIN referenced to GND. Range = 0 to 5 VDC. Resolution = 12 bits.	
Communication	SF/QF type: RS-232, RS-485 or Modbus/RTU S/Q type: Ethernet TCP or UDP C type: CANopen & RS-232 IP type: EtherNet/IP	
Physical		
Ambient Temperature	0 - 40°C (32 - 104°F) when mounted to a suitable heat sink	
Humidity	90% non-condensing	
Mass	STM24□-3□□: 1580 g	
Rotor Inertia	STM24□-3□□: 900 g·cm ²	

Efficient Integrated TSM	Motor & Drive
Integrated SSM	Motor & Drive
IP65 Integrated TSM	Motor & Drive
Motor & Drive RS	Motor & Drive
Motor & Drive SS	Motor & Drive
IP65 Pulse Input STM-R	Integrated Stepper Motor
With Controller With Controller STM	Integrated Stepper Motor
IP65 With Controller SWM	Integrated Stepper Motor
Pulse Input SRAC	AC Input
With Controller STAC	2-Phase Stepper Drive
Pulse Input SR	DC Input
Field Bus STF	DC Input
With Controller ST	DC Input
AC Input	3-Phase Stepper Drive
DC Input	3-Phase Stepper Drive
2-Phase	Stepper Motor
3-Phase	Stepper Motor
UL	Stepper Motor
Power Supplies	Accessories
Cables	Accessories
Software	Appendix
Glossary	Appendix


■ **Dimensions**(Unit:mm)

	RS232	RS485  Modbus	CANopen	Ethernet
Communications Port	 <p>TX RX RJ11</p>	<p>GND TX- TX+ RX- RX+</p> 	<p>TXD RXD CAN_H CAN_L GND</p> 	 <p>RJ45</p>
I/O Port	<p>I/O1+ I/O1 - I/O2+ I/O2 - I/O3+ I/O3 - I/O4+ I/O4 - +5V AIN GND</p> 	<p>I/O1+ I/O1 - I/O2+ I/O2 - I/O3+ I/O3 - I/O4+ I/O4 - +5V AIN GND</p> 	<p>IN1+ IN1 - IN2+ IN2 - IN3+ IN3 - OUT+ OUT - +5V AIN GND</p> 	<p>STEP+ STEP - DIR+ DIR - EN+ EN - OUT+ OUT - +5V AIN GND</p> 


■ **Dimensions**(Unit:mm)

Visit www.moonsindustries.com to get the 3D drawing.


STM24SF-3A□ & STM24QF-3A□

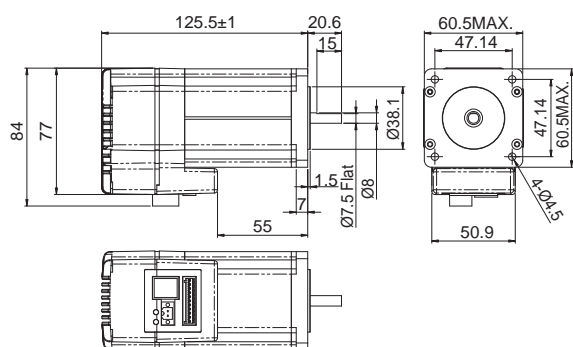


STM24SF-3R□ & STM24QF-3R□

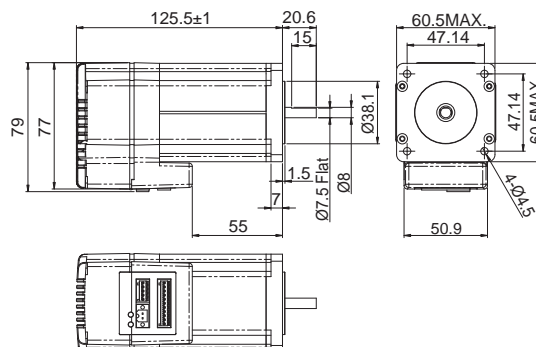


STM24C-3C□

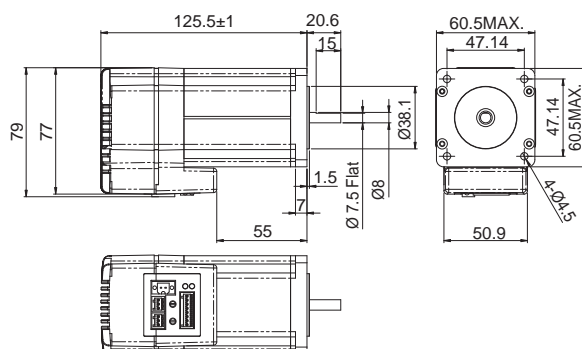


STM24S-3E□ & STM24Q-3E□ & STM24IP-3E□

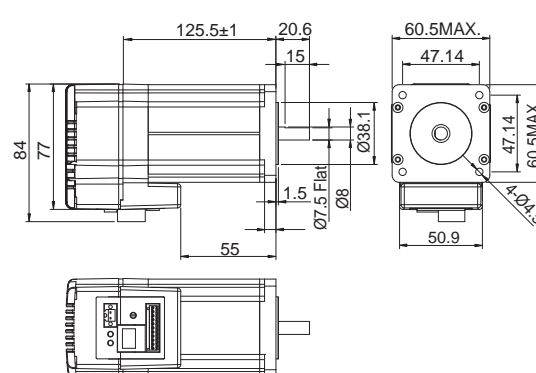

Torque Curves

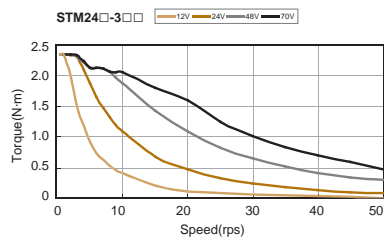

Numbering System

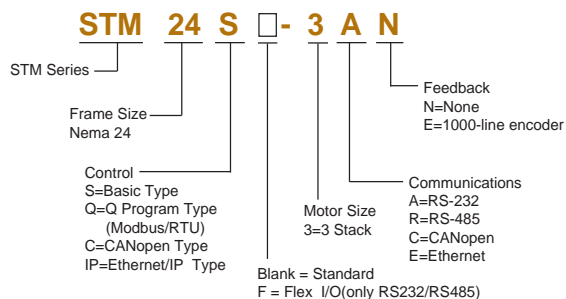

Ordering Information

Model	Control	Output Torque	Encoder	RS-232	RS-485	Modbus/RTU	CANopen	Ethernet	EtherNet/IP
STM24SF-3AN	S	2.4N·m		✓					
STM24SF-3RN					✓				
STM24SF-3AE			✓	✓					
STM24SF-3RE			✓		✓				
STM24S-3EN								✓	
STM24S-3EE			✓					✓	
STM24QF-3AN	Q	2.4N·m		✓					
STM24QF-3RN					✓	✓			
STM24QF-3AE			✓	✓					
STM24QF-3RE			✓		✓	✓			
STM24Q-3EN								✓	
STM24Q-3EE			✓					✓	
STM24C-3CN	C	2.4N·m		✓			✓		
STM24C-3CE			✓	✓			✓		
STM24IP-3EN	IP								✓
STM24IP-3EE			✓						✓

Step-Servo	Efficient TSM
	Integrated SSM
	IP65 Integrated TXM
Motor & Drive	RS
	SS
	STM-R
Integrated Stepper Motor	STM
	SWM
	IP65
AC Input	SRAC
	STAC
	SR
2-Phase Stepper Drive	STF
	ST
	AC Input
3-Phase Stepper Drive	DC Input
	2-Phase
	3-Phase
Stepper Motor	UL
	Power Supplies
	Cables
Accessories	Software
	Glossary