

Digital pulse direct step driver

The SR series are compact, powerful, digital stepper drives feature advanced microstepping performance and sophisticated current control. All drive setup is done via dip or rotary switches.

Advanced Current Control
Anti-Resonance


Torque Ripple Smoothing
Microstep Emulation



Feature

Anti-Resonance


Step motor systems have a natural tendency to resonate at certain speeds. The series of SR driver automatically calculates the system's natural frequency and applies damping to control the algorithm. This greatly improves midrange stability, allows for higher speeds, greater torque utilization and also improves settling times.



Provides better motor performance and higher speeds

Microstep Emulation


With Microstep Emulation, low resolution systems can still provide smooth motion. The drive can take low resolution step pulses and create fine resolution motion.



Deliver smoother motion in any application.

Torque Ripple Smoothing

All step motors have an inherent low speed torque ripple that can affect the motion of the motor. By analyzing this torque ripple the system can apply a negative harmonic to negate this effect, which gives the motor much smoother motion at low speed.



Produces smoother motion at low speeds

Command Signal Smoothing

Command signal smoothing can soften the effect of immediate changes in velocity and direction, making the motion of the motor less jerky. An added advantage is that it can reduce the wear on mechanical components.



Improves overall system performance

Auto Setup & Self Test

At start-up the drive measures motor parameters, including the resistance and inductance, then uses this information to optimize system performance. The drive can also detect open and short circuits.

Specification	
Speed range	Up to 50 rps
Ambient temp	0 - 40°C
Ambient humidity	90% or less(non-condensing)
Shock	5.9m/s ² maximum
Storage temp	-10 - 70°C
Cooling way	Natural cooling or forced cooling
Environment	Avoid dust,oil mist and corrosive gas
Mass	SR2/SR2-Plus/SR3-mini: Approx.120g
	SR4/SR4-Plus/SR8/SR8-Plus/3SR8/3SR8-Plus: Approx.310g
Certification	RoHS , CE (EMC): EN 61800-3:2004

Feature	
Idle current	Automatically reduce motor current after 1 second when motor stop, dip switch for setting: 50% or 90% of rated current
Anti-resonance	Driver controls motor current by using the parameter of selectable motor and ratio of inertias For improving system stability and smoothing speed, switch for setting
control mode	Pulse input control Step&Dir
Input signal filter	Filter the input signal noise for protecting wrong moving, switch for setting:2mhz or 150khz(for sr3-mini, 500khz or 150khz)
Microstep Emulation	Switch selectable microstep emulation provides smoother, more reliable motion
Rotating switch for matching motor	Switch selectable microstep emulation provides smoother, more reliable motion
Self-Test	Switch selectable automatic self test, while self test, drive will rotate the motor back and forth, two turns in each direction
Fault output	Optically isolated,30VDC max, 100mA max

Characteristic										
	SR2	SR2-Plus	SR3-mini	SR4	SR4-Plus	SR8	SR8-Plus	3SR2	3SR8	3SR8-Plus
Idle current	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Anti-resonance	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Control mode	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Input signal filter	✓	✓	✓		✓		✓	✓		✓
Sinking Method Natural	✓	✓	✓		✓		✓	✓		✓
Selecting motor by rotatable switch				✓	✓	✓	✓		✓	✓
Self-test	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Fault output		✓		✓	✓	✓	✓		✓	✓

Electrical Specifications

SR2

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	12	-	48	VDC
Output current(peak)	0.3	-	2.2	Amps
Cost current of digital input signal	6	10	15	mA
Step Frequency	2	-	2M	Hz
STEP minimum pulse width	250	-	-	ns
DIR minimum pulse width	80	-	-	us
Under Voltage Protection	-	10	-	VDC
Over-voltage protection	-	52	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S

SR2-Plus

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	12	-	48	VDC
Output current(peak)	0.3	-	2.2	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	10	-	VDC
Over-voltage protection	-	52	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S
Output current	-	-	100	mA
Output voltage	-	-	30	VDC

Specification

SR4

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	24	-	48	VDC
Output current(peak)	1	-	4.5	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	20	-	VDC
Over-voltage protection	-	60	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S
Output current	-	-	100	mA
Output voltage	-	-	30	VDC

SR8

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	24	-	75	VDC
Output current(peak)	2.4	-	7.8	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	20	-	VDC
Over-voltage protection	-	85	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S
Output current	-	-	100	mA
Output voltage	-	-	30	VDC

SR3-mini

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	12	-	48	VDC
Output current(peak)	0.4	-	3	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	500K	Hz
Step Pulse width	1000	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	10	-	VDC
Over-voltage protection	-	53	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S

3SR8

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	24	-	75	VDC
Output current(peak)	2.4	-	7.8	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	20	-	VDC
Over-voltage protection	-	85	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S
Output current	-	-	100	mA
Output voltage	-	-	30	VDC

SR4-Plus

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	24	-	48	VDC
Output current(peak)	1	-	4.5	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	20	-	VDC
Over-voltage protection	-	60	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S
Output current	-	-	100	mA
Output voltage	-	-	30	VDC

SR8-Plus

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	24	-	75	VDC
Output current(peak)	2.4	-	7.8	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	20	-	VDC
Over-voltage protection	-	85	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S
Output current	-	-	100	mA
Output voltage	-	-	30	VDC

3SR2

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	12	-	48	VDC
Output current(peak)	0.3	-	2.2	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	10	-	VDC
Over-voltage protection	-	52	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S

3SR8-Plus

Drive parameter	Min.	Type.	Max.	Unit
Supply voltage	24	-	75	VDC
Output current(peak)	2.4	-	7.8	Amps
Cost current of digital input signal	6	10	15	mA
Step Pulse frequency	2	-	2M	Hz
Step Pulse width	250	-	-	ns
Direct pulse width	80	-	-	us
Low-voltage protection	-	20	-	VDC
Over-voltage protection	-	85	-	VDC
Input signal voltage	4	-	28	VDC
Initialization time	-	-	2.5	S
Output current	-	-	100	mA
Output voltage	-	-	30	VDC









Mechanical dimension

Unit:mm

SR2		
SR2-Plus		
3SR2		
SR3-mini		

Mechanical dimension












Unit:mm

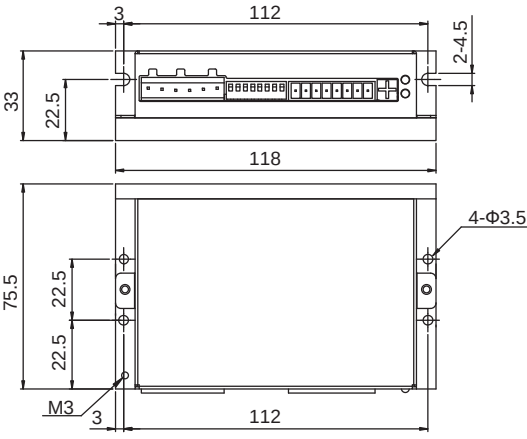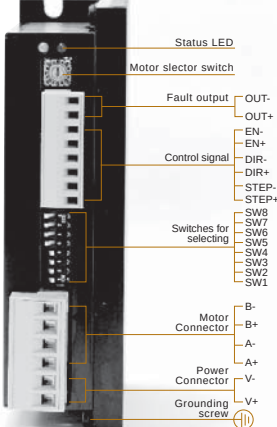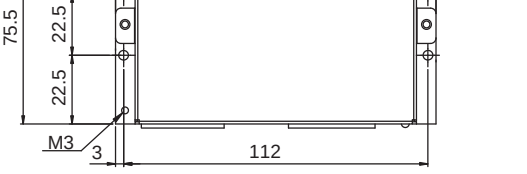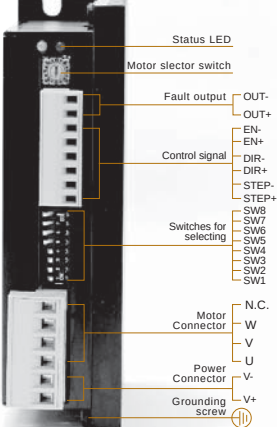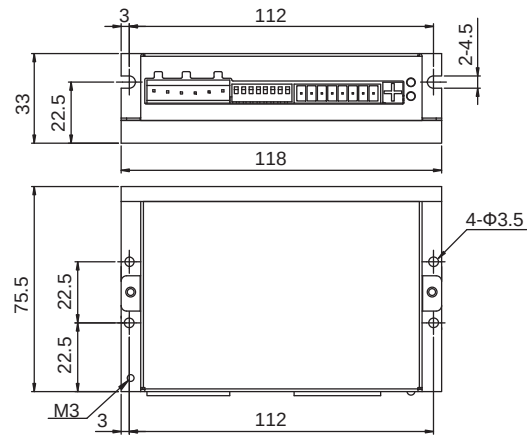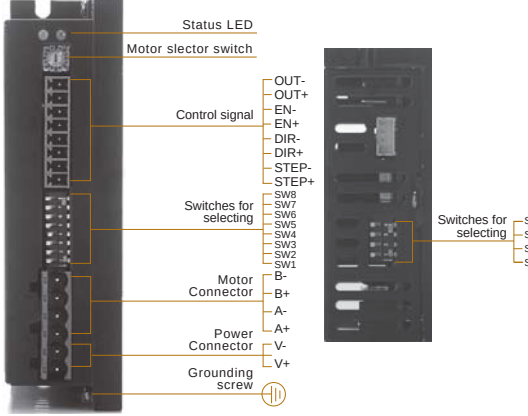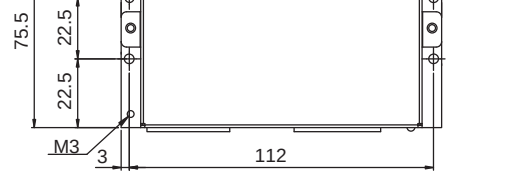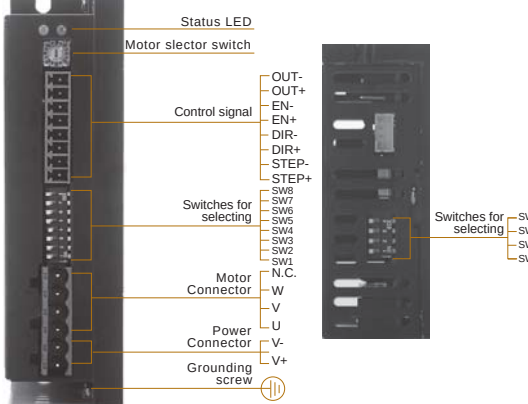SR4/SR8		
3SR8		
SR4-Plus/ SR8-Plus		
3SR8-Plus		








Matching driver		Model	Shaft	Step angle	Leads	Length	Holding torque	Current	Resistance	Rotor inertia	Motor mass	Dielectric strength																	
						mm	N·m	A/Phase	Ω/Phase	g·cm ²	Kg																		
2 phase driver	SR2 / SR2-Plus / SR3-mini	AM11HS1008-07	single shaft	1.8°	4	31	0.05	1.6	2.5	9	0.1	500VAC 1 minute																	
		AM11HS3007-02	single shaft			40	0.08	1.6	1.7	12	0.15																		
		AM11HS5008-01	single shaft			51	0.12	1.6	3.5	18	0.2																		
		AM14HYB401-03	single shaft			40	0.2	1	4.3	20	0.21																		
		AM17HD4452-02N	single shaft			34.3	0.25	1.8	1.5	38	0.23																		
		AM17HD4452-01N	double shaft																										
		AM17HD2438-02N	single shaft			39.8	0.4	1.8	1.9	57	0.28																		
		AM17HD2438-01N	double shaft																										
		AM17HD6426-06N	single shaft			48.3	0.5	1.8	2.3	82	0.36																		
		AM17HD6426-05N	double shaft																										
		AM17HDB410-01N	single shaft			62.8	0.85	1.6	3.2	123	0.6																		
		AM23HS0420-01	single shaft			41	0.6	2.2	1.8	135	0.42																		
		AM23HS0420-02	double shaft																										
		AM23HS2449-01	single shaft			54	1.2	2.2	2.4	260	0.6																		
		AM23HS2449-02	double shaft																										
		AM23HS3454-01	single shaft			76	1.8	2.2	2.9	460	1																		
		AM23HS3454-02	double shaft																										
		AM23HS04A0-01	single shaft			39	0.82	2.2	1.5	120	0.4																		
		AM23HS04A0-02	double shaft																										
		AM23HS84A0-01	single shaft			55	1.5	2.2	2.5	220	0.6																		
		AM23HS84A0-02	double shaft																										
		AM23HSA4A0-01	single shaft			77	2.3	2.2	3	390	1																		
		AM23HSA4A0-02	double shaft																										
	SR4 / SR4-Plus	AM23HS0421-01	single shaft					41	0.6	4.5	0.48		135	0.42															
		AM23HS0421-02	double shaft																										
		AM23HS2450-01	single shaft												54	1.2	4.5	0.63	260	0.6									
		AM23HS2450-02	double shaft																										
		AM23HS3455-01	single shaft												76	1.8	4.5	0.75	460	1									
		AM23HS3455-02	double shaft																										
		AM23HS04B0-01	single shaft												39	0.82	4.5	0.4	120	0.4									
		AM23HS04B0-02	double shaft																										
		AM23HS84B0-01	single shaft												55	1.5	4.5	0.63	220	0.6									
		AM23HS84B0-02	double shaft																										
		AM23HSA4B0-01	single shaft												77	2.3	4.5	0.8	390	1									
		AM23HSA4B0-02	double shaft																										
		AM23HS5412-01	single shaft												111	3.2	4.5	1.2	750	1.5									
		AM23HS5412-02	double shaft																										
		AM24HS2402-08N	single shaft												54	1.2	4.5	0.43	450	0.83									
		AM24HS2402-11N	double shaft																										
		AM24HS5401-10N	single shaft												85	2.5	4.5	0.65	900	1.4									
		AM24HS5401-24N	double shaft																										
		SR8 / SR8-Plus	AM34HD0404-08												single shaft			66.5	3	7	0.24	1100	1.6						
			AM34HD0404-09												double shaft														
			AM34HD1404-06												single shaft									96	5	7	0.33	1850	2.7
			AM34HD1404-07												double shaft														
			AM34HD2403-07												single shaft														
	AM34HD2403-08		single shaft																										
3 phase driver	3SR8 / 3SR8-Plus	AM24HC4306-01	single shaft	1.2°	3	45.5	0.5	5.8	0.33	180	0.5																		
		AM24HC2306-01	single shaft			54.5	0.9		0.4	280	0.8																		
		AM24HC3306-03	single shaft			76.5	1.5		0.63	460	1.3																		
		AM24HC4306-03	single shaft			45.5	0.5		0.33	180	0.5																		
		AM24HC2308-02	single shaft			54.5	0.9		0.4	280	0.8																		
		AM24HC3306-07	single shaft			76.5	1.5		0.63	460	1.3																		
		AM34HC0305-01	single shaft			66.5	2.5		7	0.53	1100	1.6																	
		AM34HC1305-01	single shaft			96	4	0.58		1850	2.7																		
		AM34HC2306-01	single shaft			125.5	5.5	0.9		2750	3.8																		

Torque Curves










SR2/SR2-Plus/SR3-mini

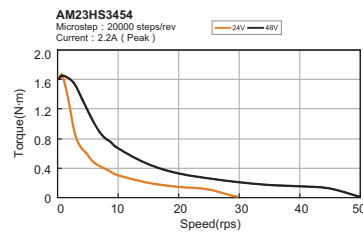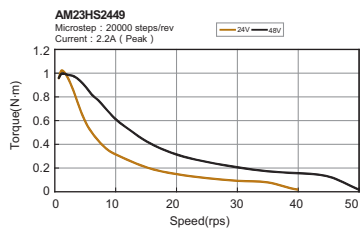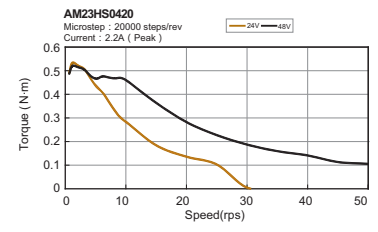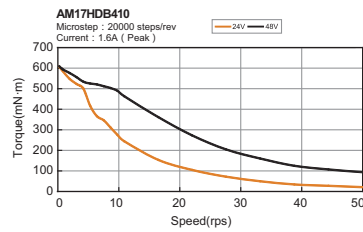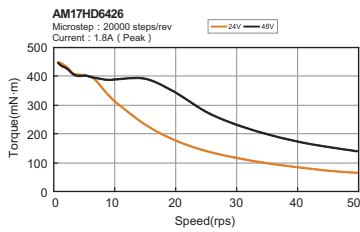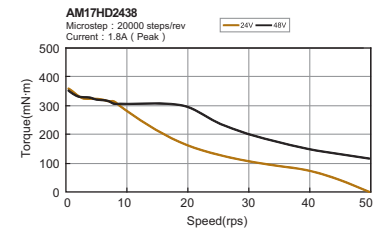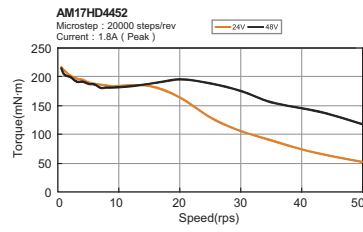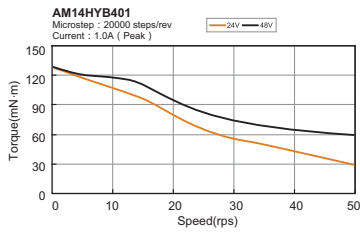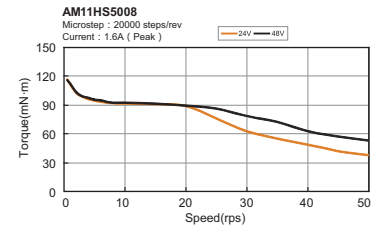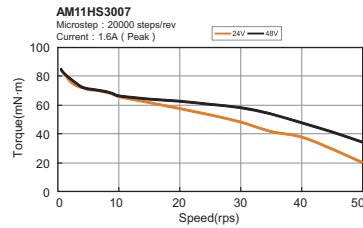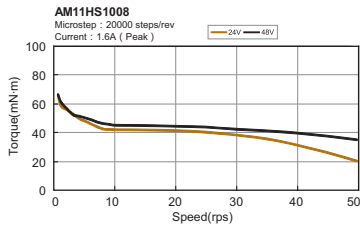




3SR8/3SR8-Plus

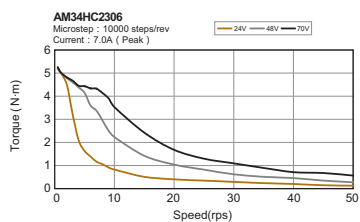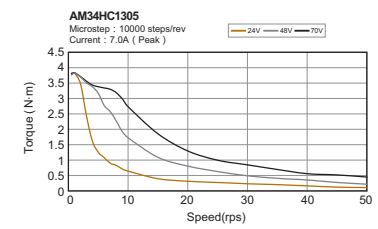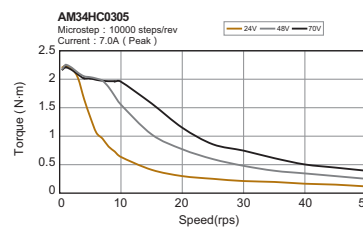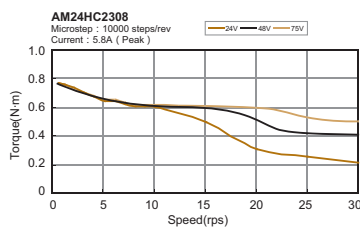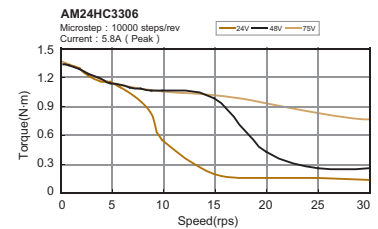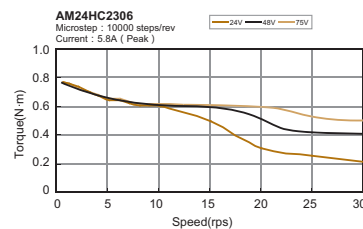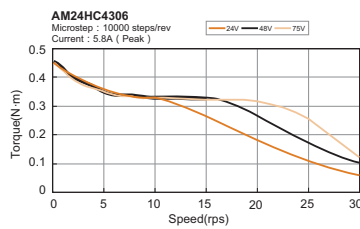

SR4/SR4-Plus

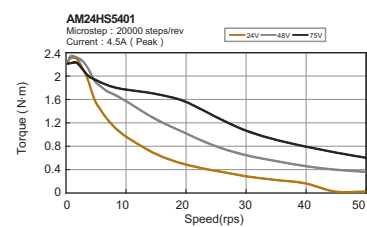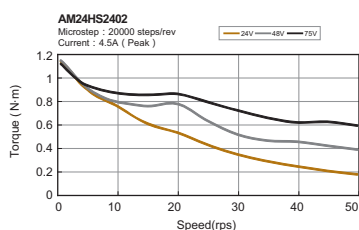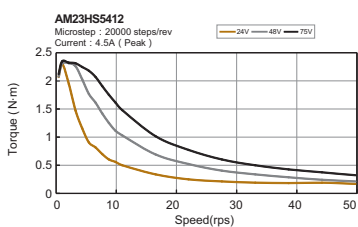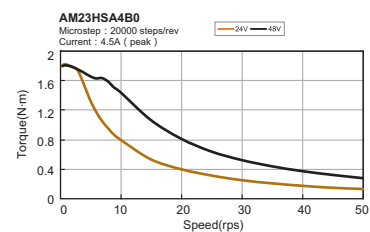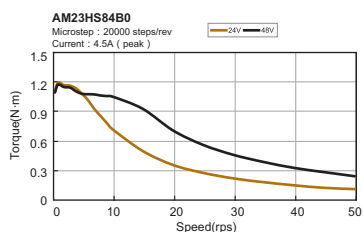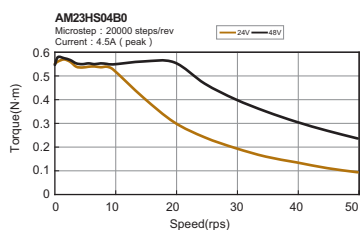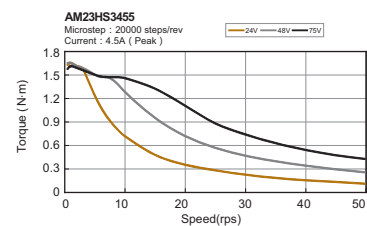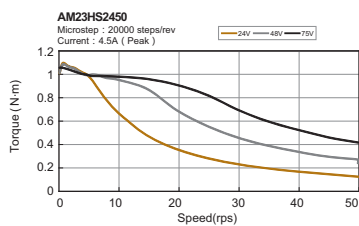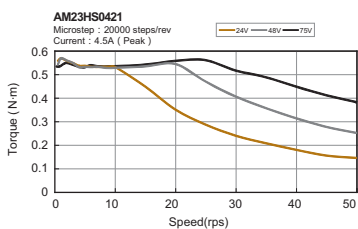

SR8/SR8-Plus

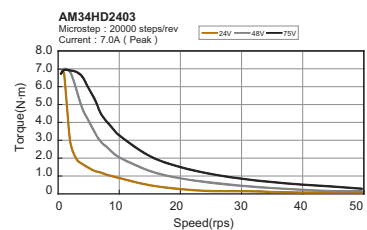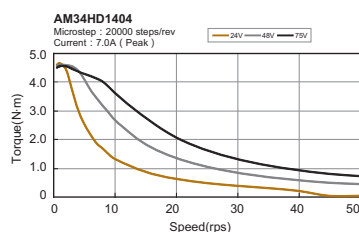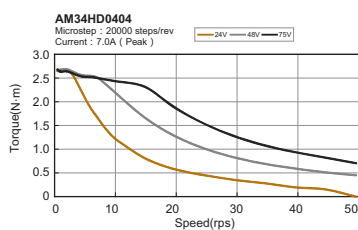

Selectable power supply

Feature


- Universal AC input/full range:85-265VAC or 120-370VDC
- Active PFC build-in, PF>0.95,compliance to EN 6100-3-2
- Safety: UL/UV/CB/CE
- Protection:short circuit, overload, over voltage, over temperature
- LED indicator for power on
- Vertical terminal is standard, horizontal terminal/connector modes are available
- 100% full load burn-in test
- compact size, high performance, high reliability
- RoHS compliant
- 2-year warranty



Single output
170 × 99 × 50mm

Model of power supply: **MF150A24AG-V**

rated output voltage (V)	range of output current (A)	peak output current (A)	rated output power (W)	adjustable range of output voltage*1 (V)	ripple and noise (p-p)*1, *2 (mV)	Line regulation*2 (mV)	Load regulation*2 (mV)
24	0~6.3	9.5	151	21.6~26.4	150	96	120

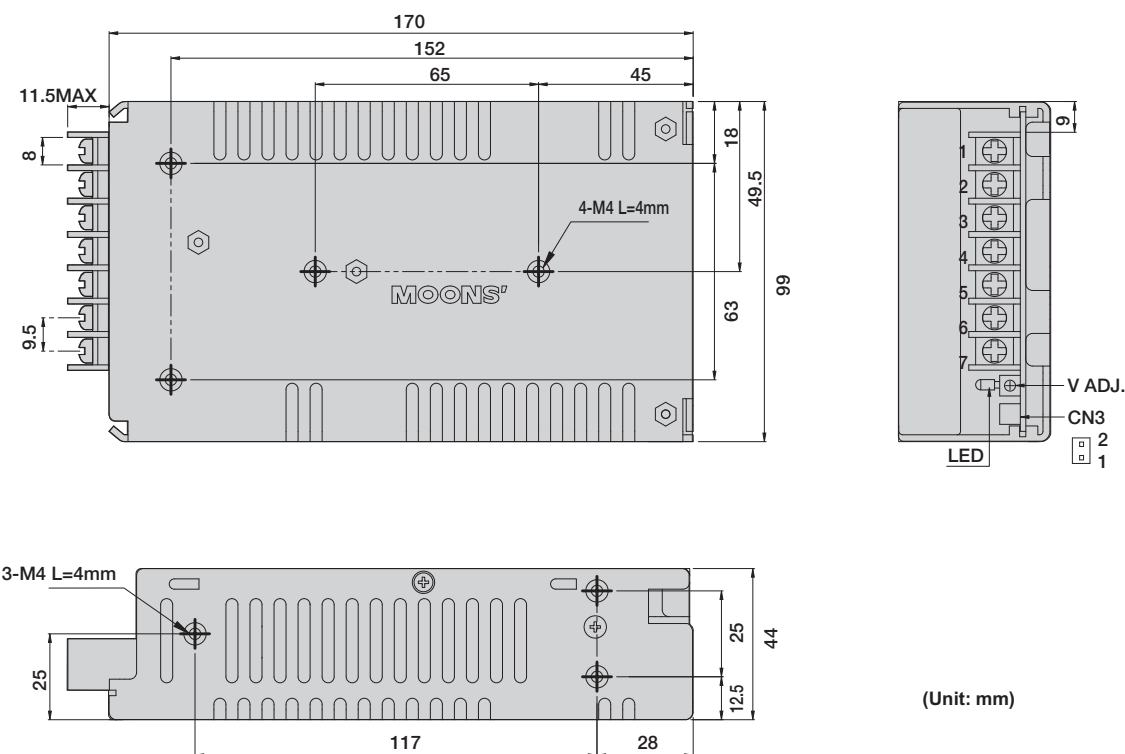

(Unit: mm)

• Pin configuration

Pin no.	Assignment
1	AC / L
2	AC / N
3	FG
4,5	DC OUTPUT/_V
6,7	DC OUTPUT/+V

• CN3: JST S2B-XH or Equivalent(optional)

Pin no.	Assignment	Output: Equivalent	Contact Pin:equivalent
1	RC+	JST XHP Equivalent(optional)	JST SXH-001T-P0.6 Equivalent(optional)
2	RC-		

Characteristic Of Power Supply



- Universal AC input/full range:85-265VAC or 120-370VDC
- Active PFC build-in, PF>0.95,compliance to EN 6100-3-2
- Safety: UL/UV/CB/CE
- Protection:short circuit, overload, over voltage, over temperature
- LED indicator for power on
- Vertical terminal is standard, horizontal terminal/connector modes are available
- 100% full load burn-in test
- compact size, high performance, high reliability
- RoHS compliant
- 2-year warranty



Single Output
199 × 99 × 52mm

Model Of Power Supply: MF320A48AG-V

Rated Output Voltage (V)	Range Of Output Current (A)	Peak Output Current (A)	rated output power (W)	adjustable range of output voltage*1 (V)	Ripple And Noise (P-P)*1, *2 (mV)	Line Regulation*2 (mV)	Load Regulation*2 (mV)
48	0~6.7	8.7	321	43.2~52.8	240	96	240

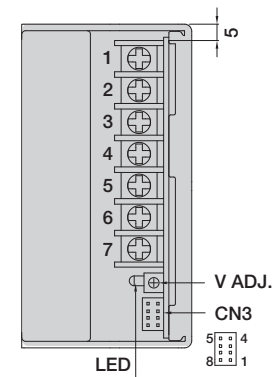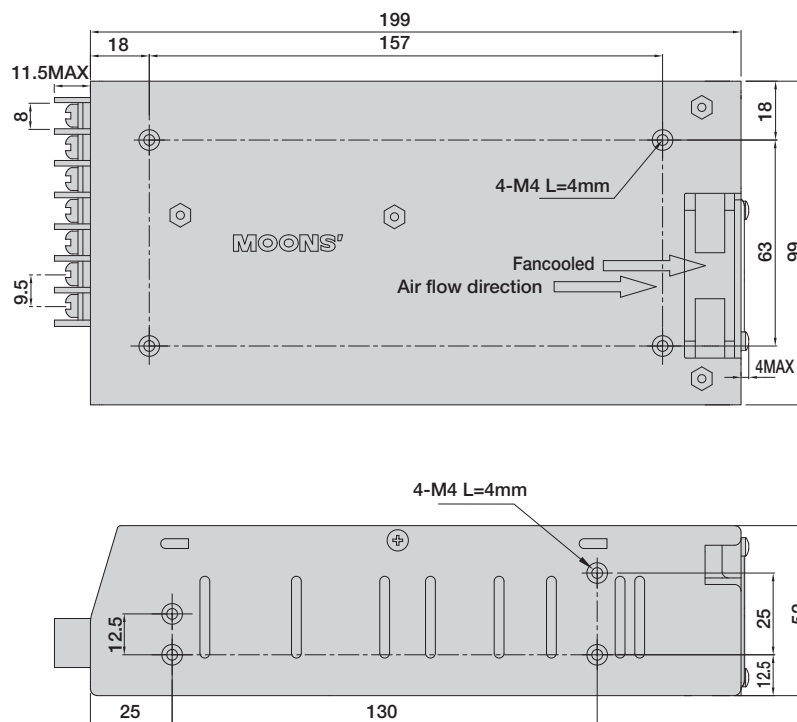

(Unit: mm)



• Pin configuration

Pin No.	Assignment
1	AC / L
2	AC / N
3	FG $\perp$
4,5	DC Output -V
6,7	DC Output +V

• CN3: JST S8B_PHDSS or Equivalent(optional)

Pin No.	Assignment	Pin No.	Assignment
1	COM	8	PF
2	RC+	7	RC-
3	VO-	6	-S
4	VO+	5	+S

Numbering System

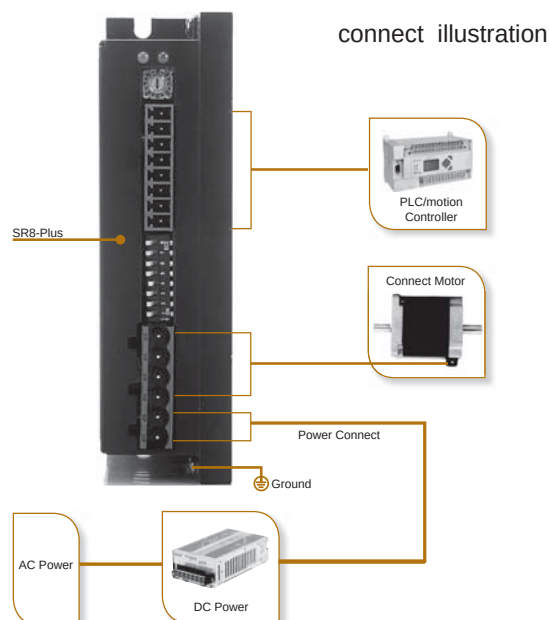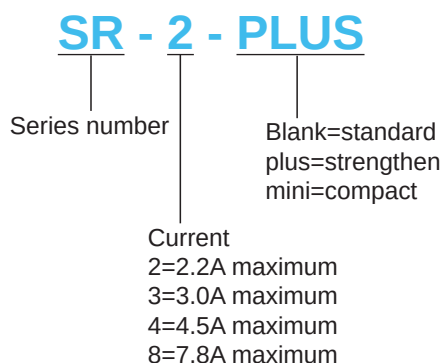

Ordering information

Type	Model	Current	Voltage	Selectable Microstep	Selectable Current
2 Phase Driver	SR2	0.3-2.2A	12-48VDC	16 settings	8 settings
	SR2-Plus			16 settings	
	SR3-mini	0.4-3A	12-48VDC	16 settings	
	SR4	1.0-4.5A	24-48VDC	8 settings	
	SR4-Plus			16 settings	
	SR8	2.4-7.8A	24-75VDC	8 settings	
	SR8-Plus			16 settings	
3 Phase Driver	3SR2	0.3-2.2A	12-48VDC	16 settings	8 settings
	3SR8	2.4-7.8A	24-75VDC	8 settings	
	3SR8-Plus			16 settings	



Headquarters
SHANGHAI AMP&MOONS' AUTOMATION CO.,LTD.
 No. 168 Mingjia Road Industrial Park North
 Minhang District Shanghai 201107, P.R. China
 Tel: +86(0)21-5263 4688
 Fax: +86(0)21-6296 8682
 Web: www.moonsindustries.com
 E-mail: ama-info@moons.com.cn

Service Center
+86-400-820-9661

MOONS' Industries (America), Inc.
 1113 North Prospect Avenue, Itasca, IL
 60143 U.S.A.
 Tel: 001-630-833-5940
 Fax: 001-630-833-5946

APPLIED MOTION PRODUCTS, INC.
 404 Westridge Dr. Watsonville, CA 95076,
 USA
 1-800-525-1609
 Tel: +1 831 761 6555
 Fax: +1 831 761 6544

MOONS' Industries (Europe) S.r.l.
 Via Torri Bianche n.1 20059 Vimercate(MB)
 Italy
 Tel: +39 039 62 60 521
 Fax: +39 039 96 31 409

MOONS' Industries (South-East Asia) Pte Ltd.
 33 Ubi Avenue 3 #08-23 Vertex Singapore
 408868
 Tel: +65 6634 1198
 Fax: +65 6634 1138

MOONS' INDUSTRIES JAPAN CO., LTD
 〒222-0033
 神奈川県横浜市中区新横浜 2 丁目 12 番
 地 1 新横浜光伸ビル 6F 601
 Tel: +81 045 475 5788
 Fax: +81 045 475 5787

Shenzhen Branch Office
 Room 2209, 22/F, Kerry Center, No. 2008 Renminnan
 Road
 Shenzhen 518001 P. R.China
 Tel: +86 (0)755-2547 2080
 Fax: +86 (0)755-2547 2081

Beijing Branch Office
 Room 816, Block B, China Electronics Plaza,
 No. 3 Danling Street Haidian District Beijing,
 100080 P.R. China
 Tel: +86 (0)10-5875 3312
 Fax: +86 (0)10-5875 2279

Qingdao Branch Office
 Room 10E, No.73 Wangjiao Mansion, mid.
 Hongkong Road Qingdao 266071 P. R.China
 Tel: +86 (0)532-8587 9625
 Fax: +86 (0)532-8587 9512

Wuhan Branch Office
 Room 3001, World Trade Tower, No.686 Jiefang
 Avenue, Jiangnan District, Wuhan 430022 P.R.China
 Tel: +86 (0)27-8544 8742
 Fax: +86 (0)27-8544 8355

Cheng Du Branch Office
 Room 1917, Western Tower,
 No.19, 4th Section of South People Road, Wuhou
 District, Chengdu 610041 P.R.China
 Tel: +86 (0)28-8526 8102
 Fax: +86 (0)28-8526 8103

Xi'an Branch Office
 Room 1006, Block D, Wangzuo International City,
 No.1 Tangyan Road, Xi'an 710065 P. R.China
 Tel: +86 (0)29-8187 0400
 Fax: +86 (0)29-8187 0340

Ningbo Branch Office
 Room 309, Block B, Taifu Plaza, No. 565 Jiangjia Road
 Jiangdong District Ningbo, 315040 P.R. China
 Tel: +86 (0)574-8705 2739
 Fax: +86 (0)574-8705 2365

Guangzhou Branch Office
 Room 4006, Tower B, China Shine Plaza,
 No. 9 Linhe Xi Road, Tianhe District, 510610
 P.R. China
 Tel: +86 (0)20-38010153
 Fax: +86 (0)20-38103661



MOONS'
 moving in better ways

• All the specifications, technical parameters of the products provided in this catalog are for reference only, subject to change without notice.
 For the latest details, please contact our sales department.