

MOONS'

moving in better ways



Stepper Products

General Catalogue

Integrated Step-Servo Motor
Step-Servo Motor & Driver
Integrated Stepper Motor
Stepper Driver
Stepper Motor

Dawn of MOONS' 3A Era

1st A Motion Products & Motion Control Products for Manufacturing Automation

MOONS' is a leading manufacturer of the key parts, components and system level products used in manufacturing automation including: Stepper Motor and Drive, Brushless Motor and Drive, AC Servo Motor and Drive, Integrated solutions. We continue to play a major role in the manufacturing automation field with us moving forward to being a system level provider of total motion control solutions.

2nd A Intelligent LED Driver & Control Technologies for LED Lighting Management Automation

3rd A Online Asset Monitoring, Fault Detection and Diagnosis Solutions for EAM Automation



MOONS' Business Philosophies

- Customer satisfaction
- Employee satisfaction

MOONS' aims to enhance customer satisfaction through the provision development of innovative solutions, manufacture of high quality products, and ontime delivery and outstanding customer support.

- Partnership

MOONS' values and respects our employees input and encourages them to grow together with the company. We have been working to develop tools and trainings to build a thriving culture of excellence internally to support the future growth of our employees and the company.

- Partnership

MOONS' strongly believes in a true integrated partnership between all partners in business including customers, distributors and all these in supply chain. As a result of our this philosophy, we endeavor to provide the best value contribution to all partners, which can help our partners improve their competitiveness to achieve the win-win situation.

Worldwide service map





moving in better ways

To demonstrate our commitment to our community and our customers, **MOONS'** has adopted as our official slogan: "Moving in Better Ways". These words have following meanings to **MOONS'**:

- **MOONS'** is an excellent global manufacturer of control motor & control motor drive system
- **MOONS'** is a leading global supplier of intelligent LED lighting control system and drive solutions
- **MOONS'** is a well-recognized reliable provider of system solutions for the intelligent system management in large asset-intensive industrial enterprises

We provide superior motion control systems to our global customers through optimizing of product design, engineering, and manufacturing. This is done by strengthening process and quality control and constantly creating solutions using motion control products that are more energy efficient and environmental friendly.

We provide leading-edge LED lighting drivers, controls and management solutions. Our leading lighting control technology makes the drive professional, convenient to use, and more energy efficient in reducing costs and enhancing profits for global customers.

We provide management system solutions for large asset-intensive industries including power generation, petrochemical, metallurgy, coal and large scale agriculture.

- **We are an ambitious and enterprising company**

MOONS' never stops the on-going accelerated pace to improve processes and increase efficiency. Through scientific management methodologies and tools and incorporating advanced technology with senior management experience, we constantly optimize management processes that enable **MOONS'** to maintain on-going growth in competitive markets.

- **We are a cooperative and thriving group**

All members of our team are able to incorporate the concept of moving in better ways during work, they continually upgrade our collective values, and strive for excellence in the process of doing business to improve expertise and gain better opportunities.

Motion Control Products and Solutions

MOONS' provides a wide range of motion control products and solutions serving the fields of printing, intelligent stage lighting, textile machinery, consumer appliance, banking equipment, factory automation, electronics, semiconductor equipment, packaging machinery, medical equipment and measuring equipment, to name a few.

Entering into the hybrid stepper motor business in 1997, **MOONS'** has grown to where it is now one of the top 5 global manufacturers of stepper motors, and an integrated provider of related motion control products and solutions.

MOONS' has been and is concentrating on technological advancement, product design innovation and improvement for standard and customized motion control products and solutions. Cutting edge technologies, product improvement and scientifically proven management systems permit **MOONS'** to exceed customers' requirements around the world. **MOONS'** supports our growing customer base by providing exceptional quality, application engineering, rapid prototyping, regional warehousing and competitive pricing.



Introduction to Stepper Motors

A stepper motor is an electromechanical device which converts electrical pulses into discrete mechanical movements. The shaft of a stepper motor rotates in discrete step increments when electrical command pulses are applied to it in the proper sequence.


Stepper motors are the easiest devices for precise positioning control. They are widely being used in various application for position and speed via all kinds of control signals such as digital, analog, communication etc.

■ Features

◇ Precise Positioning Control


A stepper motor rotates with a fixed step angle, just like the second hand of a clock. This angle is called "basic step angle." MOONS' offers several types of "basic step angle" as standard motors: 2-phase stepping motors with a basic step angle of 0.9° and 1.8° and 3-phase stepping motors with a basic step angle of 1.2°.

Besides the standard motor, MOONS' also has stepper motors available with other "basic step angle." They are 0.72°, 1.5°, 3.6° and 3.75°, these motors are not listed in this catalogue, please contact MOONS' for details.

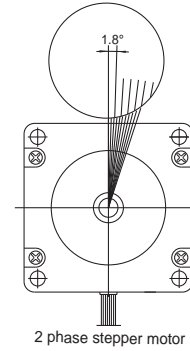

◇ Easy Control with Pulse Signals

A system configuration for high accuracy positioning is shown below. The rotation angle and speed of the stepping motor can be controlled accurately using pulse signals from the controller.

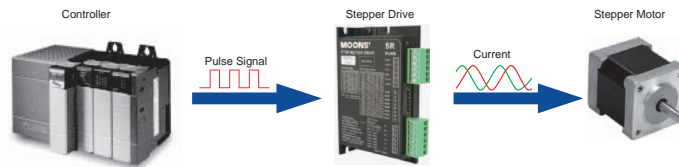


■ What is a Pulse Signal?

A pulse signal is an electrical signal whose voltage level changes repeatedly between ON and OFF.

Each ON/OFF cycle is counted as one pulse. A command with one pulse causes the motor output shaft to turn by one step.

The signal levels corresponding to voltage ON and OFF conditions are referred to as "H" and "L," respectively.

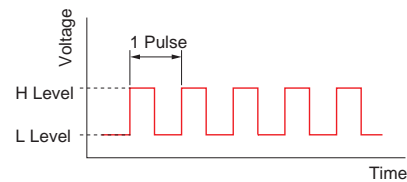


■ The length of Rotation is Proportional to the Number of Pulses

The length of rotation of the stepping motor is proportional to the number of pulse signal (pulse number) given to the driver.

The relationship of the stepper motor's rotation (rotation angle of the motor output shaft) and pulse number is expressed as follows:

$$\theta = \theta_s \times A$$

θ : Rotation angle of the motor output shaft [deg]
 θ_s : Step angle [deg/step]
 A : Pulse number [pulses]

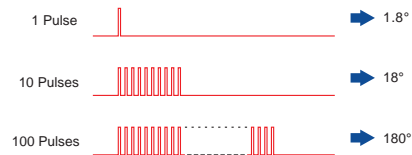


■ The Speed is Proportional to the Pulse Frequency

The speed of the stepper motor is proportional to the frequency of pulse signals given to the driver.

The relationship of the pulse frequency [Hz] and motor speed [r/min] is expressed as follows:

$$N = \frac{\theta_s}{360} \times f \times 60$$

N : Speed of the motor output shaft [r/min]
 θ_s : Step angle [deg/step]
 f : Pulse frequency [Hz]
 (Number of pulses input per second)

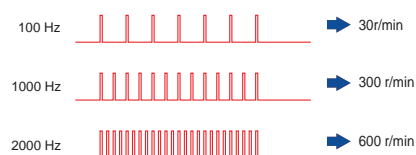

- Efficient Integrated TSM
- Integrated SSM
- Step-Servo IP65 Integrated TXM
- Motor & Drive RS
- Motor & Drive SS
- Integrated Stepper Motor STM-R Pulse Input With Controller
- STM With Controller
- SWM IP65 Pulse Input With Controller
- AC Input SRAC Pulse Input With Controller
- 2-Phase Stepper Drive STAC
- DC Input SR Pulse Input
- STF Field Bus With Controller
- ST
- 3-Phase Stepper Drive AC Input
- DC Input
- Stepper Motor 2-Phase UL
- 3-Phase UL
- Accessories Power Supplies
- Cables
- Appendix Software
- Glossary


◇ Generating High Torque with a Compact Size

Stepper motors generate high torque with a compact size.


These features give them excellent acceleration and response, which in turn makes these motors well-suited for torque-demanding applications where the motor must be started and stopped frequently.

To meet the need for greater torque at low speed, MOONS' also has geared motors option.

- Frequent Starting/Stopping is Possible




- Speed VS Torque Characteristics comparison between servo and stepper with same motor size.

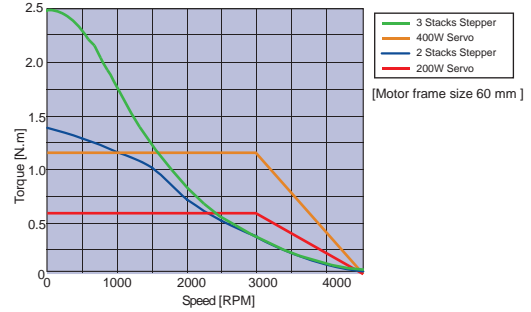


◇ The Motor Holds Itself at a Stopped Position

Stepper motor has full torque at stand-still as long as the windings are energized. This means that the motor can be held at a stopped position without using a mechanical brake.

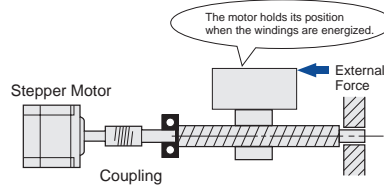

◇ Motor with Electromagnetic Brake

Once the power is cut off, the self-holding torque of the motor is lost and the motor can no longer be held at the stopped position in vertical operations or when an external force is applied. In lift and similar applications, an electromagnetic brake type motor is required.




◇ Closed Loop Servo Control Stepper Motors

Step-Servo

The **Step-Servo** is an innovative revolution for the world of stepping motor, it enhances the stepping motor with servo technology to create a product with exceptional feature and broad capability.

The **Step-Servo** greatly improves the performance to be much more Intelligent, Efficient, Compact, Accurate, Fast and Smooth.

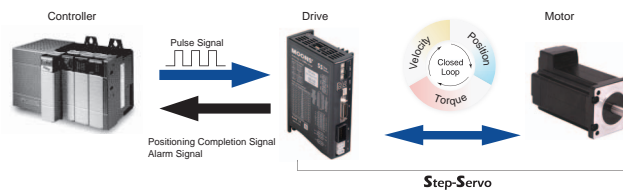

■ Stepper Motor Category

Stepper motors come in different types including the basic type, encoder type, IP65 type, Integrated type with drive and controller, brake type and geared type. The availability of all options can also be combined together as the most optimize and compact motion control unit, for example, MOONS' can offer encoder and geared type, IP65 integrated with drive, controller and encoder, all combinations are available per request.

| | |
|---|---|
| <p>◇ Basic Type</p> <p>A basic model that is easy to use and designed with a balanced set of functions and characteristics.</p> |  |
| <p>◇ Encoder Type</p> <p>Encoder type stepper gives the possibility for closed loop control, encoder feedback signals can be used for position verification and enhanced performance as stall detection and stall prevention depending on the features of the drive.</p> |  |
| <p>◇ IP65 Type</p> <p>IP65 type stepper motors with the feature of dust proof and resistant to low pressure water jets, are ideal for applications in wet factory environments such as the food and beverage industry or outdoor use.</p> <p>IP65 specifies a product that is dust tight (no ingress of dust; complete protection against contact) and protected against water jets (water projected by a nozzle from any direction shall have no harmful effects).</p> |  |
| <p>◇ Integrated Type with Drive and Controller</p> <p>Integrated stepper motors offer a space-saving design that reduces wiring and saves on cost over separate motor and drive components. For controller type, you only need cable connection for Power and necessary communication or sensor depending on application, it also cost for host controller and make it easy for you to setup sofiscated motion control system.</p> |  |
| <p>◇ Brake Type</p> <p>These motors incorporate a non-excitation type electromagnetic brake. When the power is accidentally cut off due to power outage or other unexpected event, the electromagnetic brake holds the load in position to prevent it from dropping or moving. Brake type steppers are wildy used in vertical axis application.</p> |  |
| <p>◇ Geared Type</p> <p>These motors incorporate a dedicated position-control gearhead with reduced backlash to make the most of the high controllability of the motors.</p> <p>The gearhead ensures highly accurate, smooth operation even in applications where a large torque is received.</p> |  |


| |
|--------------------------------------|
| Efficient Integrated TSM |
| Integrated SSM |
| Step-Servo IP65 Integrated TXM |
| Motor & Drive RS |
| Motor & Drive SS |
| Integrated Stepper Motor |
| Pulse Input With Controller STM-R |
| With Controller STM |
| IP65 Pulse Input With Controller SWM |
| AC Input SRAC |
| 2-Phase Stepper Drive |
| With Controller STAC |
| Pulse Input SR |
| DC Input |
| Field Bus STF |
| With Controller ST |
| 3-Phase Stepper Drive |
| AC Input |
| DC Input |
| Stepper Motor |
| 2-Phase |
| 3-Phase |
| UL |
| Accessories |
| Power Supplies |
| Cables |
| Software |
| Appendix |
| Glossary |

Control Modes for Drives

With MOONS' advanced stepper drive technology, each stepper motor can be operated under various control modes as position control, velocity control or torque control. MOONS' stepper drive accepts all types of control signals including digital, analog and Industrial network communications. Built-in controller Q drive supports stand alone operation for single axis motion by stored sophisticated program execution.

◇ Pulse Control

Pulse control is a traditional way to command a stepper motor in position and velocity control. The length of rotation is proportional to the number of pulses as well as the speed is proportional to the pulse frequency.

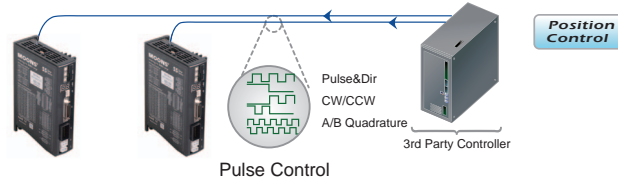

Three most popular pulse control digital signal types are Pulse & Direction, CW/CCW Pulse and A/B Quadrature.


■ Pulse & Direction

When the Pulse input is turned ON while the DIR input is ON, the motor will rotate by one step in one direction.

When the Pulse input is turned ON while the DIR input is OFF, the motor will rotate by one step the other direction.

*Direction definition of DIR input can be configured via MOONS' software.

The chart below shows motor configured as while the DIR input is ON, the motor will rotate by CW direction.




■ CW/CCW Pulse

When the X1 input is turned ON, the motor will rotate by one step in One direction. When the X2 input is turned ON, the motor will rotate by one step in the other direction.

*Direction definition can be configured via MOONS' software.

The chart below shows motor configured as while the X1 input is ON, the motor will rotate by one step in CW direction.

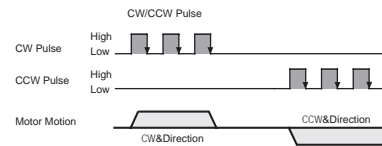


■ A & B Quadrature

The motor will move according to signals that are fed to the drive from a two channel incremental master encoder.


Direction definition can be configured via MOONS' software. Direction is determined via which channel leads the other.

The chart below shows motor configured as while X1 Leads X2, the motor will rotate by CW direction.

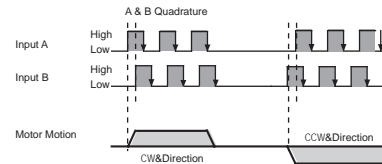


◇ Analog Control

MOONS' stepper drive has the ability to accept analog signal for position and analog control, **Step-Servo** can also use analog signal for torque control.

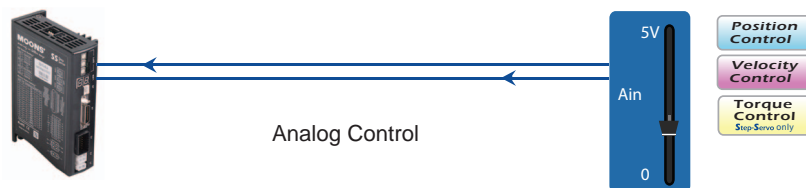


◇ Field Bus Control

MOONS' stepper drive supports all popular Industrial network communications including RS-485, Modbus, CAN , Ethernet and EtherCAT.

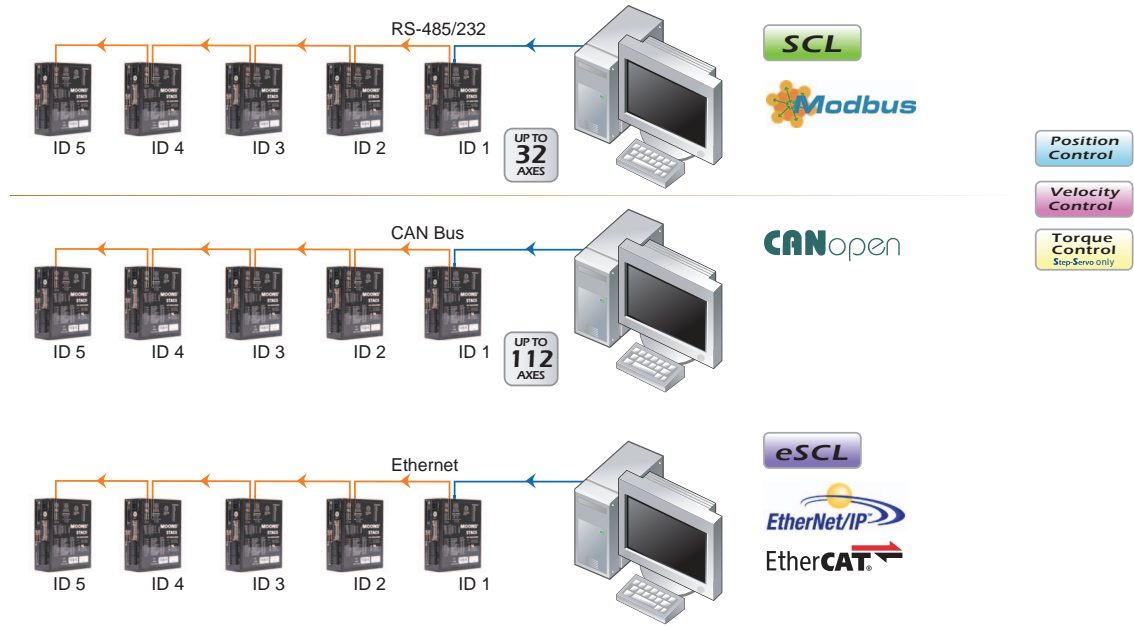

◇ Stand Alone Operation

MOONS' Built-in controller Q drive supports stand alone operation for single axis motion by stored sofiscated program execution. It has the ability to run up to 744 lines of stored Q program in non-volatile memory. Q programs are created using the Q Programmer software, which provides multi-tasking, math calculations using analog and digital parameters, conditional processing, data register manipulation, and more features in a robust yet simple text-based programming language.

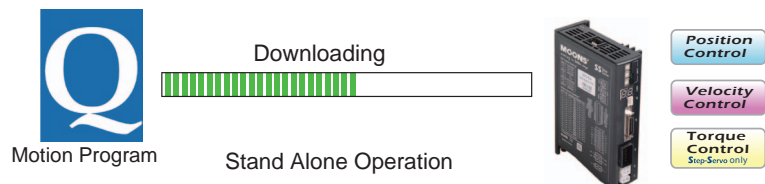

- Efficient Integrated TSM
- Integrated SSM
- IP65 Integrated TXM
- Motor & Drive RS
- Motor & Drive SS
- Pulse Input With Controller STM-R
- With Controller STM
- IP65 With Controller SWM
- Pulse Input With Controller SRAC
- With Controller STAC
- 2-Phase Stepper Drive
- Pulse Input SR
- Field Bus With Controller STF
- With Controller ST
- AC Input
- DC Input
- 3-Phase Stepper Drive
- AC Input
- DC Input
- 2-Phase Stepper Motor
- 3-Phase Stepper Motor
- UL Stepper Motor
- Power Supplies
- Cables
- Software
- Glossary
- Appendix

Overview of MOONS' Stepper Products

Closed Loop Step-Servo

TSM Series - Integrated Step-Servo



Frame Size: 28mm, 42mm, 56mm, 60mm, 86mm
Input Voltage(Typical): TSM11:24VDC TSM17:12-48VDC
 TSM23/24:12-70VDC TSM34: 24-70VDC

Encoder: Incremental 20000 counts/rev
 (only TSM11 encoder 4096 counts/rev)

Enhanced Intelligence:
 ■ Automatic load inertia detection
 ■ Extended homing and software limit

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control, Daisy Chain
- Stand alone operation

Inputs and Outputs:

- P Type- 4 Digital Inputs, 3 Digital Outputs, Encoder Outputs
- S/Q/C/IP Type- 8 Digital Inputs, 4 Digital Outputs, 1 Analog Input

Communication:



SSM Series - Integrated Step-Servo



Frame Size: 42mm, 56mm, 60mm
Input Voltage(Typical): SSM17: 12-48VDC SSM23/24: 12-70VDC

Encoder: Incremental 20000 counts/rev
Easy Wiring with Spring Connectors

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control
- Stand alone operation

Inputs and Outputs:

- S/Q Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- C Type- 3 Digital Inputs, 1 Digital Output

Communication:



TXM Series - IP65 Type Integrated Step-Servo



Frame Size: 60mm, 86mm
Input Voltage(Typical): TXM24: 12-70VDC TXM34: 24-70VDC

Encoder: Incremental 20000 counts/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control(Daisy Chain for RS-485 and CANopen)
- Stand alone operation


Inputs and Outputs:

- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- C Type- 5 Digital Inputs, 3 Digital Outputs

Communication:



RS Series - Step-Servo Motor & Drive Package

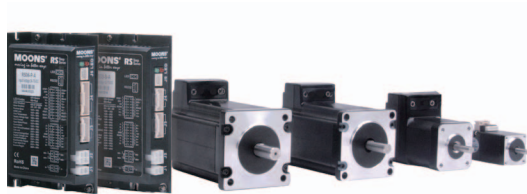

Motor Frame Size: 28mm, 42mm, 56mm, 60mm, 86mm
Input Voltage(Typical): 24-70VDC

Encoder: Magnetic 4096 counts/rev

Enhanced Intelligence:
 ■ Automatic load inertia detection and switch set stiffness
 ■ Extended homing and software limit

Control Modes:

- Pulse Control
- SCL Command Control
- Stand alone operation

Inputs and Outputs:


- P Type- 4 Digital Inputs, 3 Digital Outputs, Encoder Outputs
- S/Q Type- 4 Digital Inputs, 3 Digital Outputs

Communication:



Efficient Integrated TSM
 Integrated SSM
 IP65 Integrated TXM
 Motor & Drive RS
 Motor & Drive SS
 Pulse Input STM-R
 With Controller With Controller With Controller
 STM
 IP65 With Controller With Controller
 SWM
 Pulse Input Pulse Input
 SRAC
 With Controller With Controller
 STAC
 SR
 Pulse Input
 SR
 Field Bus
 STF
 DC Input
 2-Phase Stepper Drive
 With Controller
 ST
 AC Input
 AC Input
 DC Input
 3-Phase Stepper Drive
 2-Phase
 2-Phase
 Stepper Motor
 UL
 Power Supplies
 Accessories
 Cables
 Software
 Appendix
 Glossary

SS Series - Step-Servo Motor & Drive Package

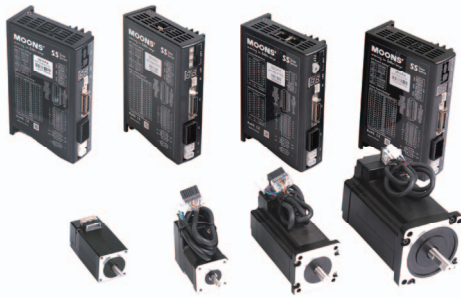

Motor Frame Size: 28mm, 42mm, 56mm, 60mm, 86mm
Input Voltage(Typical): 24-70VDC
Encoder: Incremental 20000 counts/rev
 (only AM11SS motor encoder 4096 counts/rev)

Position Control

Velocity Control

Torque Control

Enhanced Intelligence:

- Automatic load inertia detection and switch set stiffness
- Extended homing and software limit

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control(Daisy Chain for RS-485, CANopen and EtherCAT)
- Stand alone operation

Inputs and Outputs:

- P/R Type- 6 Digital Inputs, 2 Digital Outputs, Encoder Outputs
- S/Q/C/EC Type- 8 Digital Inputs, 4 Digital Outputs, 2 Analog Inputs

Communication:



◇ Integrated Stepper Motor

STM-R Series - Pulse Input Type Integrated Stepper Motor



Frame Size: 42mm, 56mm
Input Voltage(Typical): STM17R: 12-48VDC STM23R: 12-70VDC
Encoder Option: Incremental 4000 counts/rev
Microstep Resolution: Switch set, up to 25600 steps/rev
Control Modes:

Position Control


- Pulse Control

Inputs and Output:

- 3 Digital Inputs, 1 Digital Output



STM Series - Controller Type Integrated Stepper Motor

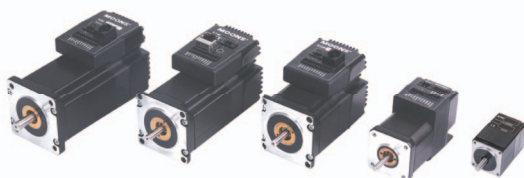

Frame Size: 28mm, 42mm, 56mm, 60mm
Input Voltage(Typical):

- STM11 - 24VDC
- STM17 - 12-48VDC
- STM23/24 - 12-70VDC

Encoder Option: Incremental 4000 counts/rev

- Stall Detection
- Stall Prevention

Microstep Resolution: Software set, up to 51200 steps/rev

Control Modes:

- Pulse Control
- Analog Control
- Field Bus Control
- Stand alone operation


Inputs and Outputs:

- STM11 4 digital Inputs, 2 Outputs
- SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
- C Type- 3 Digital Inputs, 1 Digital Output

Communication:



SWM Series - IP65 Type Integrated Stepper Motor

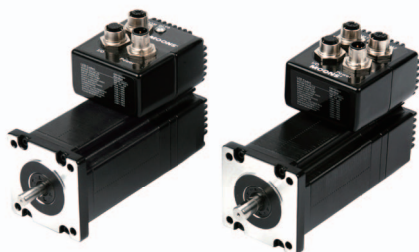

Frame Size: 60mm
Input Voltage(Typical): 12-70VDC
Encoder Option: Incremental 4000 counts/rev
Microstep Resolution: Software set, up to 51200 steps/rev
Control Modes:

Position Control

Velocity Control

- Stall Detection
- Stall Prevention

- Pulse Control
- Analog Control
- Field Bus Control(Daisy Chain for RS-485 and CANopen)
- Stand alone operation

Inputs and Outputs:

- SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
- S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input

Communication:



- Efficient Integrated TSM
- Integrated SSM
- Step-Servo IP65 Integrated TXM
- Motor & Drive RS
- Motor & Drive SS
- Integrated Stepper Motor STM-R
- STM
- IP65 SWM
- AC Input SRAC
- 2-Phase Stepper Drive STAC
- SR
- DC Input STF
- 3-Phase Stepper Drive ST
- AC Input
- DC Input
- 2-Phase Stepper Motor
- 3-Phase Stepper Motor
- UL
- Power Supplies
- Accessories Cables
- Software
- Appendix Glossary

◇ Two Phase Stepper Drive

SRAC Series - AC Input Stepper Drive



- Input Voltage(Typical):** AC120V/240V
Drive Output Current: Up to 8Amp(Peak of Sine)
Microstep Resolution: Switch set, up to 25600 steps/rev
Control Modes:
- Pulse Control
- Inputs and Outputs:**
- 3 Digital Inputs, 1 Digital Output
- Supported Motor Frame Size:** 56mm, 60mm, 86mm

Position Control

STAC Series - AC Input Controller Type Stepper Drive



- Input Voltage(Typical):** AC120V/240V
Drive Output Current: Up to 2.5Amp(Peak of Sine)
Encoder Option: Incremental
- Stall Detection
 - Stall Prevention
- Microstep Resolution:** Software set, up to 51200 steps/rev
Control Modes:
- Pulse Control
 - Analog Control
 - Field Bus Control
 - Stand alone operation
- Inputs and Outputs:**
- S/Q/C Type- 4 Digital Inputs, 2 Digital Outputs, 1 Analog Input
 - Q-A/IP Type- 12 Digital Inputs, 6 Digital Outputs, 1 Analog Input

Position Control


Velocity Control

Communication:



Supported Motor Frame Size: 56mm, 60mm, 86mm

SR Series - DC Input Stepper Drive

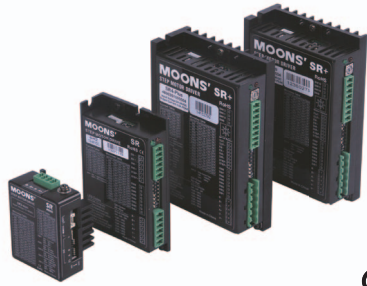

- Input Voltage(Typical):**
- SR2/SR2-Plus/SR3-mini: 12- 48VDC
 - SR4/SR4-Plus: 24-48VDC
 - SR8/SR8-Plus: 24-80VDC
- Drive Output Current:** Up to 7.8Amp(Peak of Sine)
Microstep Resolution: Switch set, up to 51200 steps/rev
Control Modes:
- Pulse Control
- Inputs and Outputs:**
- 3 Digital Inputs, 1 Digital Output
- Supported Motor Frame Size:**
- 20mm, 28mm, 35mm, 42mm, 56mm, 60mm, 86mm

Position Control

STF Series - Intelligent field bus control Stepper Drive



- Input Voltage(Typical):** DC12V/24V/48V
Drive Output Current: Up to 10Amp(Peak of Sine)
Microstep Resolution: Software set, up to 51200 steps/rev
Control Modes:
- Field Bus Control
 - Stand alone operation
- Inputs and Outputs:**
- 8 Digital Inputs, 4 Digital Outputs
- Communication:**

Position Control

Velocity Control



Supported Motor Frame Size:

- 20mm, 28mm, 35mm, 42mm, 56mm, 60mm, 86mm

ST Series - DC Input Controller Type Stepper Drive



Input Voltage(Typical): DC24V/48V
Drive Output Current: Up to 10Amp(Peak of Sine)
Encoder Option: Incremental
 ■ Stall Detection
 ■ Stall Prevention

Position Control
 Velocity Control

Microstep Resolution: Software set, up to 51200 steps/rev
Control Modes:
 ■ Pulse Control
 ■ Analog Control
 ■ Field Bus Control
 ■ Stand alone operation

Inputs and Outputs:
 ■ S type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
 ■ Q/C/IP- 8 Digital Inputs, 4 Digital Outputs, 2 Analog Inputs

Communication:



Supported Motor Frame Size:
 ■ 28mm, 35mm, 42mm, 56mm, 60mm, 86mm

◇ Three Phase Stepper Drive

AC Input Stepper Drive and DC Input Stepper Drive



Drive Input Voltage(Typical):

- AC 120V/240V
- DC 24V/48V

Control Modes:

- Pulse Control
- Analog Control
- Stand alone operation

Inputs and Outputs:

- 3 Digital Inputs, 1 Digital Output


Supported Motor Frame Size: 60mm, 86mm

| | |
|--------------------------|--|
| Step-Servo | Efficient Integrated TSM |
| | Integrated SSM |
| | IP65 Integrated TXM |
| | Motor & Drive RS |
| | Motor & Drive SS |
| Integrated Stepper Motor | Pulse Input STM-R |
| | With Controller With Controller STM |
| | IP65 With Controller With Controller SWM |
| AC Input | Pulse Input With Controller SRAC |
| | With Controller STAC |
| | DC Input |
| DC Input | Pulse Input SR |
| | Field Bus STF |
| | With Controller ST |
| 3-Phase Stepper Drive | AC Input |
| | DC Input |
| Stepper Motor | 2-Phase |
| | 3-Phase |
| | UL |
| Accessories | Power Supplies |
| | Cables |
| Appendix | Software |
| | Glossary |

◇ Stepper Motor

Standard Motors

2-Phase Basic Type

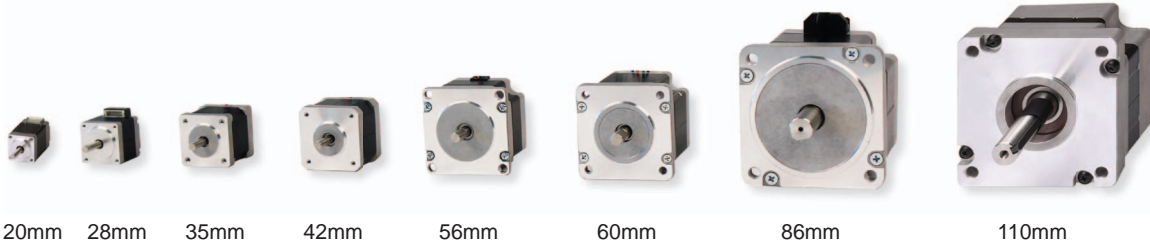


20mm 28mm 35mm 42mm 56mm 60mm 86mm 110mm

2-Phase PowerPlus Series Type




56mm

2-Phase IP65 Type

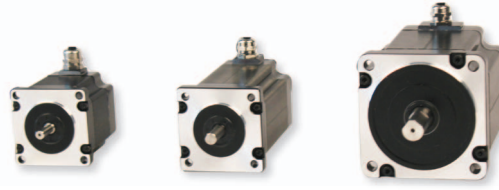


56mm 60mm 86mm

2-Phase Encoder Type

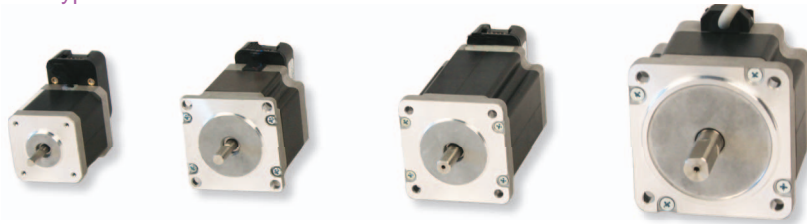

42mm 56mm 60mm 86mm

2-Phase Brake Type

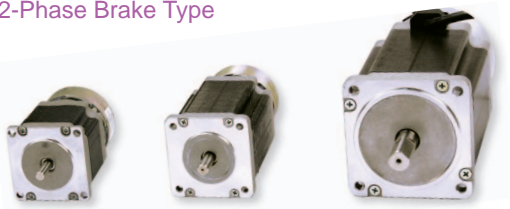


42mm 60mm 86mm

3-Phase Basic Type



60mm 86mm

Planetary Reducer Motors Type

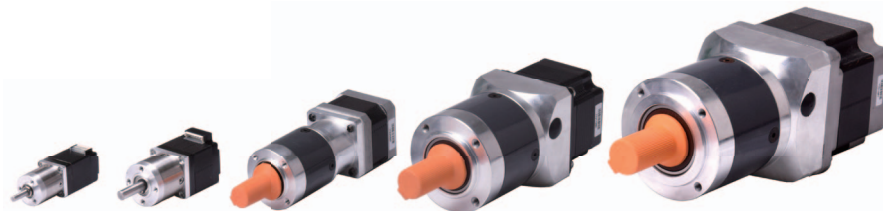

20mm 28mm 42mm 57mm(60) 86mm

Efficient Integrated TSM
 Integrated SSM
 IP65 Integrated TXM Step-Servo
 Motor & Drive RS
 Motor & Drive SS
 Pulse Input STM-R
 With Controller With Controller STM Integrated Stepper Motor
 IP65 With Controller With Controller SWM
 Pulse Input SRAC
 With Controller With Controller STAC AC Input
 Pulse Input SR
 Field Bus STF DC Input 2-Phase Stepper Drive
 With Controller ST
 AC Input 3-Phase Stepper Drive
 DC Input
 2-Phase
 3-Phase
 UL Stepper Motor
 Power Supplies
 Cables Accessories
 Software
 Glossary Appendix

Stepper General Catalogue

| | | |
|---------------------------|---|---|
| Step-Servo | Efficient Integrated TSM Series25 | Efficient Integrated TSM |
| | Integrated SSM Series.....60 | Integrated SSM |
| | IP65 Type Integrated TXM Series.....69 | IP65 Integrated TXM |
| | Motor & Drive Package RS Series82 | Motor & Drive RS |
| | Motor & Drive Package SS Series97 | Motor & Drive SS |
| Integrated Stepper Motor | Pulse Input Type STM-R.....135 | IP65 Pulse Input STM-R |
| | Controller Type STM Series142 | IP65 With Controller With Controller STM |
| | IP65 Controller Type SWM Series156 | IP65 With Controller With Controller SWM |
| Two Phase Stepper Drive | Pulse Input Type SRAC Series169 | AC Input Pulse Input With Controller SRAC |
| | With Contrller Type STAC Series179 | AC Input With Controller With Controller STAC |
| | DC Input SR Series195 | DC Input Pulse Input SR |
| | Field Bus STF Series.....211 NEW | DC Input Field Bus With Controller STF |
| | DC Input Controller Type ST Series220 | DC Input With Controller With Controller ST |
| Three Phase Stepper Drive | AC Input235 | 3-Phase Stepper Drive AC Input |
| | DC Input237 | 3-Phase Stepper Drive DC Input |
| Stepper Motor | Two Phase248 | 2-Phase Stepper Motor |
| | Three Phase282 | 3-Phase Stepper Motor |
| | UL.....287 | UL Stepper Motor |
| Accessories | Power Supplies.....302 | Power Supplies Accessories |
| | Cables.....303 | Cables Accessories |
| Appendix | Software.....305 | Software Appendix |
| | Glossary311 | Glossary Appendix |

Integrated Stepper Motor



| | |
|--------------------------|--------------------------------|
| | Efficient Integrated TSM |
| | Integrated SSM |
| | IP65 Integrated TXM |
| | Motor & Drive RS |
| | Motor & Drive SS |
| Pulse Input STM-R | Integrated Stepper Motor STM-R |
| With Controller STM | Integrated Stepper Motor STM |
| IP65 With Controller SWM | Integrated Stepper Motor SWM |

| | | | | | | | | | | | | | | | | | | | | |
|--|----------|------------------|--------------------------------------|----------------|---------------|--------------------|-----------------------|----------|----------|-----------------------|-----------------------|-----------------------|-----------------------|----|----------------|--------|-------------|----------|----------|----------|
| | AC Input | Pulse Input SRAC | With Controller With Controller STAC | Pulse Input SR | Field Bus STF | With Controller ST | 3-Phase Stepper Drive | AC Input | DC Input | 2-Phase Stepper Drive | 3-Phase Stepper Drive | 2-Phase Stepper Motor | 3-Phase Stepper Motor | UL | Power Supplies | Cables | Accessories | Software | Glossary | Appendix |
|--|----------|------------------|--------------------------------------|----------------|---------------|--------------------|-----------------------|----------|----------|-----------------------|-----------------------|-----------------------|-----------------------|----|----------------|--------|-------------|----------|----------|----------|


Integrated Stepper Motor

The Integrated Stepper Motor is an integrated Drive+Motor, fusing step motor and drive technologies into a single device, offering savings on space, wiring and cost over conventional motor and drive solutions.

Anti-Resonance

Step motor systems have a natural tendency to resonate at certain speeds. The STM integrated motors automatically calculate the system's natural frequency and apply damping to the control algorithm. This greatly improves midrange stability, allows higher speeds and greater torque utilization, and also improves settling times.


Provides better motor performance and higher speeds



Microstep Emulation

With Microstep Emulation, low resolution systems can still provide smooth motion. The drive can take low resolution step pulses and create fine resolution motion.


Delivers smoother motion in any application



Torque Ripple Smoothing

All step motors have an inherent low speed torque ripple that can affect the motion profile of the motor. By analyzing this torque ripple the system can apply a negative harmonic to counter this effect. This gives the motor much smoother motion at low speed.

Produces smoother motion at lower speeds



Command Signal Smoothing

Command Signal smoothing can soften the effect of immediate changes in velocity and direction, making the motion of the motor less jerky. An added advantage is that it can reduce the wear on mechanical components.

Improves smoother system performance




Dynamic Current Control for STM and SWM

Allows for three current settings to help the motor run cooler and reduce power consumption.

- Running Current - the current the drive will deliver for continuous motion.
- Accel/Decel Current - the current the drive will deliver when accelerating or decelerating.
- Idle Current - reduces current draw when motor is stationary.

System runs cooler

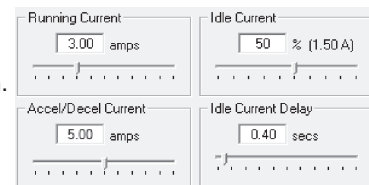

Stall Detection & Stall Prevention for STM and SWM


The optional encoder detects the rotor's position to provide Stall Detection and Stall Prevention functions.

Stall Detection notifies the system as soon as the required torque is too great for the motor, resulting in a loss of synchronization between the rotor and stator, also known as stalling. As soon as the motor stalls the drive triggers its fault output.

Stall Prevention automatically adjusts the excitation of the motor windings to maintain synchronization of the rotor and stator under all conditions. This means that motor position is maintained and corrected even when the required torque is too great for the motor. The stall prevention feature also performs position maintenance, which maintains the position of the motor shaft when at rest.

■ STM-R Control Options

Step & Direction

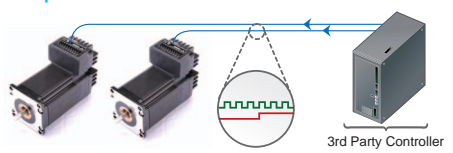


R

- Step & Direction
- CW & CCW pulse

■ STM&SWM Control Options


Step & Direction

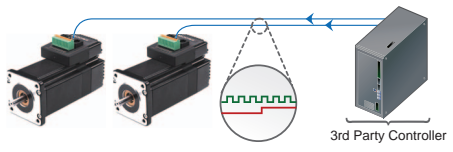

S

- Step & Direction
- CW & CCW pulse
- A/B quadrature (encoder following)


Oscillator / Run-Stop

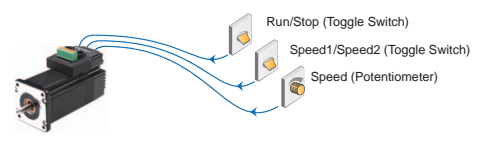

S

- Software Configuration
- Two Speeds
- Vary speed with analog input
- Joystick compatible

Host Control

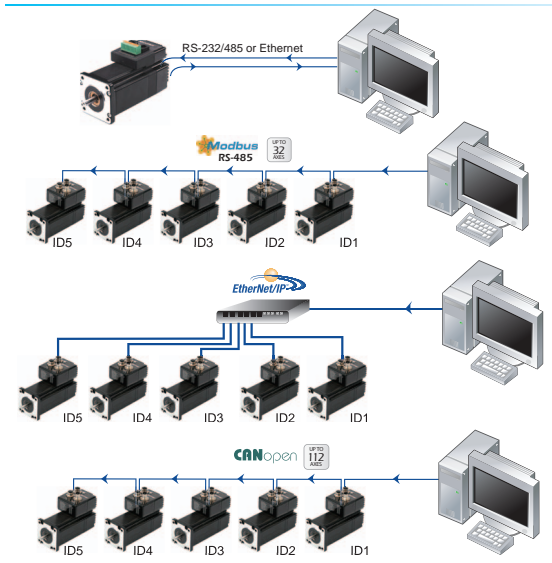

S & Q

- RS-232
- Accepts commands from host PC or PLC
- RS-485
- Accepts commands from host PC or PLC
 - Multi-axis capable, up to 32 axes


Q & IP

- Accepts commands from host PC or PLC
- 1000's of axes with Ethernet and EtherNet/IP

C

- CANopen Model
- Connect to CANopen network
 - CiA301 and CiA402 protocols
 - Multi axle bus, up to 112 axis


Stand Alone Programmable

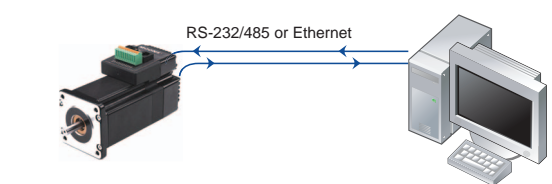

Q & IP

- Comprehensive text based language
- Download, store & execute programs
- High level features: multi-tasking, conditional programming and math functions
- Host interface while executing stored programs

PC Based Software

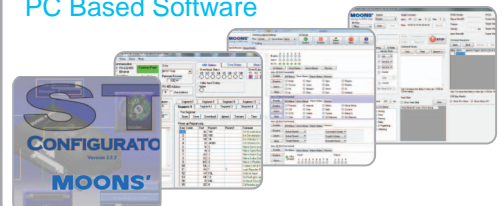

MOONS' STM and SWM products support following software application make it easy to configure, testing and evaluation.

- ST Configurator
- Q Programmer
- RS-485 Bus Utility
- CANopen Test Tool

| |
|--------------------------------|
| Efficient Integrated TSM |
| Integrated SSM |
| Step-Servo IP65 Integrated TXM |
| Motor & Drive RS |
| Motor & Drive SS |
| Integrated Stepper Motor STM-R |
| STM |
| SWM |
| AC Input SRAC |
| 2-Phase Stepper Drive STAC |
| DC Input SR |
| Field Bus STF |
| With Controller ST |
| 3-Phase Stepper Drive AC Input |
| DC Input |
| 2-Phase Stepper Motor |
| 3-Phase |
| UL |
| Power Supplies |
| Accessories Cables |
| Software |
| Glossary |
| Appendix |

Overview of Integrated Stepper Motor


STM-R Series - Pulse Input Type Integrated Stepper Motor



Frame Size: 42mm, 56mm
Input Voltage(Typical): STM17R: 12-48VDC STM23R: 12-70VDC
Encoder Option: Incremental 4000 counts/rev
Microstep Resolution: Switch set, up to 25600 steps/rev
Control Modes:
 ■ Pulse Control
Inputs and Output:
 ■ 3 Digital Inputs, 1 Digital Output

Position Control

STM Series - Controller Type Integrated Stepper Motor

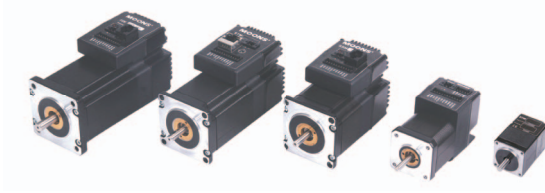


Frame Size: 28mm, 42mm, 56mm, 60mm
Input Voltage(Typical):
 ■ STM11 - 24VDC
 ■ STM17 - 12-48VDC
 ■ STM23/24 - 12-70VDC
Encoder Option: Incremental 4000 counts/rev
 ■ Stall Detection
 ■ Stall Prevention
Microstep Resolution: Software set, up to 51200 steps/rev
Control Modes:
 ■ Pulse Control
 ■ Analog Control
 ■ Field Bus Control
 ■ Stand alone operation
Inputs and Outputs:
 ■ STM11 4 digital Inputs, 2 Outputs
 ■ SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
 ■ S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input
 ■ C Type- 3 Digital Inputs, 1 Digital Output

Position Control

Velocity Control



SWM Series - IP65 Type Integrated Stepper Motor




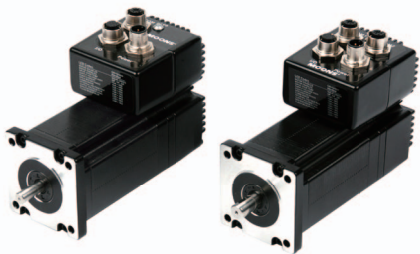


Frame Size: 60mm
Input Voltage(Typical): 12-70VDC
Encoder Option: Incremental 4000 counts/rev
 ■ Stall Detection
 ■ Stall Prevention
Microstep Resolution: Software set, up to 51200 steps/rev
Control Modes:
 ■ Pulse Control
 ■ Analog Control
 ■ Field Bus Control(Daisy Chain for RS-485 and CANopen)
 ■ Stand alone operation
Inputs and Outputs:
 ■ SF/QF Type- 4 Configurable digital Inputs/Outputs, 1 Analog Input
 ■ S/Q/IP Type- 3 Digital Inputs, 1 Digital Output, 1 Analog Input

Position Control

Velocity Control



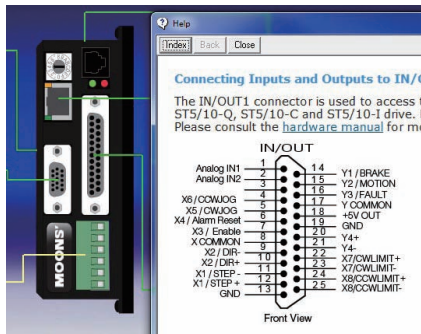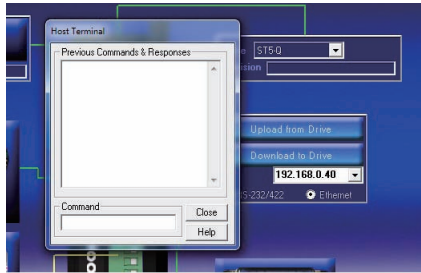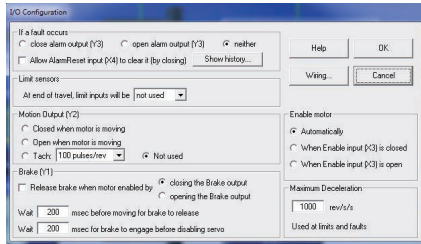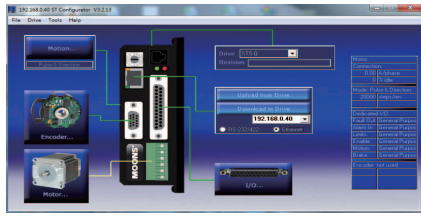

Software Features

- Intuitive interface
- Drive status and alarm monitoring
- Self-test function to test drive/motor operation
- Built-in SCL Terminal
- Online help integrated
- Supports all STM and SWM integrated steppers

About this software

The ST Configurator software makes setting up, configuring and programming STM integrated stepper a snap. All motor, I/O, encoder and motion control parameters are available to the user through an intuitive interface. The ST Configurator provides seamless communication with all models whether they have RS-232, RS-485, CANopen or Ethernet communications. It also includes a built-in Q Programmer so you can switch context quickly and easily.

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.



| |
|--|
| Efficient Integrated TSM |
| Integrated SSM |
| IP65 Integrated TXM |
| Motor & Drive RS |
| Motor & Drive SS |
| Pulse Input STM-R |
| With Controller With Controller STM |
| IP65 With Controller With Controller SWM |
| Pulse Input SRAC |
| With Controller With Controller STAC |
| Pulse Input SR |
| Field Bus STF |
| With Controller With Controller ST |
| AC Input 2-Phase Stepper Drive |
| DC Input 2-Phase Stepper Drive |
| AC Input 3-Phase Stepper Drive |
| DC Input 3-Phase Stepper Drive |
| 2-Phase Stepper Motor |
| 3-Phase Stepper Motor |
| UL |
| Power Supplies |
| Cables |
| Software |
| Glossary |
| Appendix |



FREE DOWNLOAD
Our software and user manuals can be downloaded from our website:

www.moonsindustries.com

| | | |
|-----------------|--------------------------|-------|
| Efficient | Integrated Stepper Motor | TSM |
| IP65 | Integrated Stepper Motor | SSM |
| IP65 | Integrated Stepper Motor | TXM |
| Motor & Drive | Motor & Drive | RS |
| Motor & Drive | Motor & Drive | SS |
| Pulse Input | Integrated Stepper Motor | STM-R |
| Pulse Input | Integrated Stepper Motor | STM |
| IP65 | Integrated Stepper Motor | SWM |
| Pulse Input | AC Input | SRAC |
| Win. Controller | 2-Phase Stepper Drive | STAC |
| Pulse Input | 2-Phase Stepper Drive | SR |
| Field Bus | DC Input | STF |
| With Controller | 3-Phase Stepper Drive | ST |
| AC Input | 3-Phase Stepper Drive | |
| DC Input | 3-Phase Stepper Drive | |
| 2-Phase | Stepper Motor | |
| 3-Phase | Stepper Motor | |
| UL | Stepper Motor | |
| Power Supplies | Accessories | |
| Cables | Accessories | |
| Software | Appendix | |
| Glossary | Appendix | |

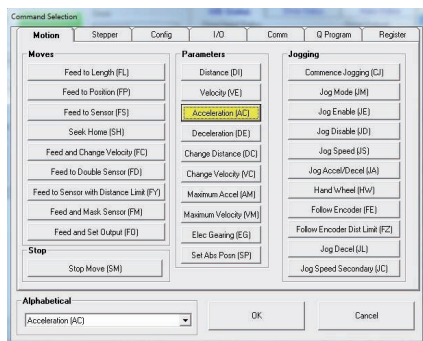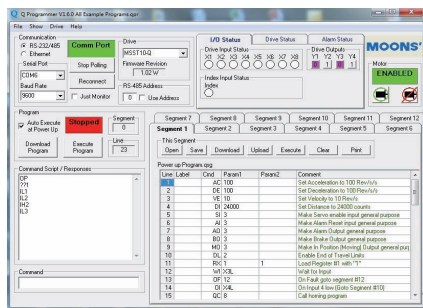

Software Features

- Single-axis motion control
- Stored program execution
- Multi-tasking
- Conditional processing
- Math functions
- Data registers
- Motion Profile simulation
- Online help integrated
- Support all Q/C/IP Types Integrated Motors in STM/SWM Series

About this software

Q Programmer is a single-axis motion control software for programmable stepper and servo drives from MOONS'. The software allows users to create sophisticated and functional programs that Q and Plus drives can run stand-alone. The commands available in the Q programming environment consist of commands for controlling motion, inputs & outputs, drive configuration and status, as well as math operations, register manipulation, and multi-tasking.

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.





FREE DOWNLOAD

Our software and user manuals can be downloaded from our website:

www.moonsindustries.com

RS-485 Bus Utility

Software

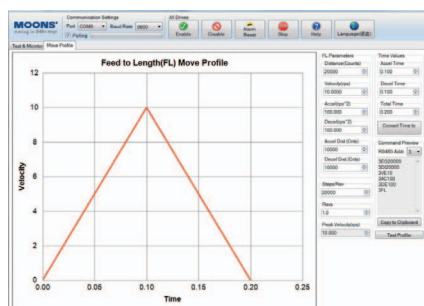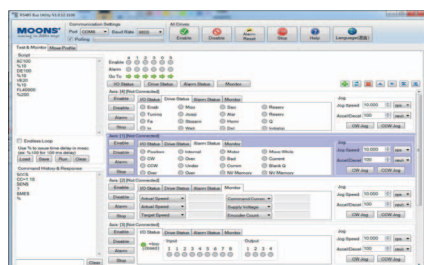

Software Features

- Stream SCL commands from the command line
- Simple interface with powerful capability
- Easy setup with RS-485 for 32 axis network motion control
- Monitoring Status of I/O, drive, alarm and the other nine most useful motion parameters
- Write and save SCL command scripts
- Online help integrated
- Supports all RS-485 drives


About this software

If you plan to stream serial commands to MOONS' drive using the Serial Command Language (SCL), to build an RS-485 multi-axis network, you'll need a simple terminal emulator to get familiar with and test your command strings and test the network. RS-485 Bus Utility is the ideal choice because it sends command strings as a packet, with minimal delay between characters, and properly terminated with a carriage return. Other terminal applications send each character as it's typed, making them difficult to use with SCL commands.

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.

CANopen Test Tool

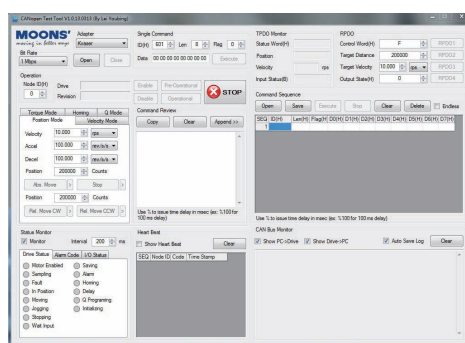

Software Features

- Friendly User Interface
- Multiple operation Mode Support
- Multi-Thread, High Performance
- CAN bus monitor and log function
- Kvaser/PEAK/ZLG adapter support

System Requirements

Microsoft Windows 7, Windows 8, Windows 10, 32-bit or 64-bit, Windows XP.


FREE DOWNLOAD

Our software and user manuals can be downloaded from our website:

www.moonsindustries.com

- Efficient Integrated TSM
- Integrated SSM
- Step-Servo IP65 Integrated TXM
- Motor & Drive RS
- Motor & Drive SS
- Integrated Stepper Motor STM-R
- With Controller STM
- IP65 With Controller SWM
- AC Input SRAC
- With Controller STAC
- 2-Phase Stepper Drive SR
- Pulse Input
- Field Bus STF
- With Controller ST
- 3-Phase Stepper Drive AC Input
- DC Input
- 2-Phase Stepper Drive
- 3-Phase Stepper Drive
- UL
- Power Supplies
- Cables
- Software
- Appendix
- Glossary

Pluse Input Type Integrated Stepper Motor STM-R Series

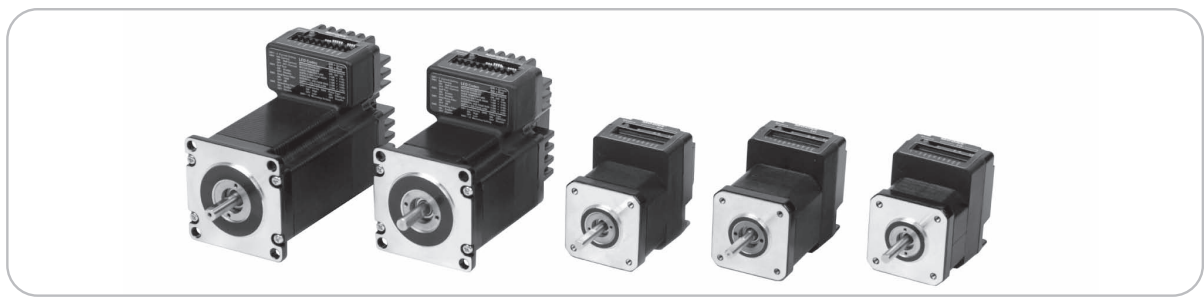

STM-R


The STM-R is an integrated Drive+Motor, fusing step motor and drive technologies into a single device, offering savings on space, wiring and cost over conventional motor and drive solutions.

- ✓ Advanced Current Control
- ✓ Anti-Resonance
- ✓ Torque Ripple Smoothing
- ✓ Microstep Emulation

■ Features

Anti-Resonance/Electronic Damping


Step motor systems have a natural tendency to resonate at certain speeds. The STM-R drive+motor automatically calculates the system's natural frequency and applies damping to the control algorithm. This greatly improves midrange stability, allows for higher speeds, greater torque utilization and also improves settling times.



Delivers better motor performance and higher speeds

Microstep Emulation


With Microstep Emulation, low resolution systems can still provide smooth motion. The drive can take low-resolution step pulses and create fine resolution micro-step motion.



Delivers smoother motion in any application

Torque Ripple Smoothing

All step motors have an inherent low speed torque ripple that can affect the motion of the motor. By analyzing this torque ripple the system can apply a negative harmonic to negate this effect, which gives the motor much smoother motion at low speed.



Delivers smoother motion at lower speeds

Command Signal Smoothing

Command Signal smoothing can soften the effect of immediate changes in velocity and direction, making the motion of the motor less jerky. An added advantage is that it can reduce the wear on mechanical components.



Improves overall system performance


Self Test & Auto Setup

At start-up the drive measures motor parameters, including the resistance and inductance, then uses this information to optimize the system performance.

| | | | | | | | | | | | | | | | | | | | |
|--------------------------|------------|---------------------|------------------|------------------|--------------------------|--------------------------------------|----------|-----------------------|----------|-----------------------|----------|----------|-----------------------|-----------------------|----|----------------|--------|----------|----------|
| Efficient Integrated TSM | Step-Servo | IP65 Integrated TXM | Motor & Drive RS | Motor & Drive SS | Integrated Stepper Motor | IP65 Pulse Input With Controller SWM | AC Input | 2-Phase Stepper Drive | DC Input | 3-Phase Stepper Drive | AC Input | DC Input | 2-Phase Stepper Motor | 3-Phase Stepper Motor | UL | Power Supplies | Cables | Software | Glossary |
|--------------------------|------------|---------------------|------------------|------------------|--------------------------|--------------------------------------|----------|-----------------------|----------|-----------------------|----------|----------|-----------------------|-----------------------|----|----------------|--------|----------|----------|

STM17R - Pulse Input Type Integrated Stepper Motor

The STM17R Integrated Motor is a cost effective, high performance, motor with the drive built in. It is based on advanced digital current control technology, and features high torque, low noise, and low vibration. Operational parameters are switch selectable.




Specifications

| Power Amplifier | |
|------------------------|---|
| Amplifier Type | Dual H-Bridge, 4 Quadrant |
| Current Control | 4 state PWM at 16 KHz |
| Power Supply | External 12 - 48 volt power supply required |
| Input Voltage Range | 10 - 52 volts min/max (nominal 12 - 48 volts) |
| Protection | Over-voltage, over-current, under-voltage, over-temp, internal motor shorts (phase-to-phase, phase-to-ground) |
| Idle Current Reduction | Switch selectable for reduction to 50% or 90% of running current |
| Ambient Temperature | 0 - 40°C (32 - 104°F) when mounted to a suitable heat sink |
| Humidity | 90% non-condensing |

| Controller | |
|------------------------|--|
| Current Control | Advanced digital current control provides excellent high speed torque |
| Speed Range | Speeds up to 3000 rpm |
| Auto Setup | Measures motor parameters to configure current control and anti-resonance gain settings |
| Encoder Feedback | Optional 1000 line external encoder, A/B/Z Differential Output |
| Step Input STEP+/- | Inputs: optically isolated, 5 - 24 volts, min. pulse width 250 ns., max. pulse frequency 2 MHz; motor executes one step on the falling edge of the STEP input signal |
| Direction Input DIR+/- | Inputs: optically isolated, 5 - 24 volts, min. pulse width 62.5 μs, max. pulse frequency 2 MHz; direction of rotation is controlled by the DIR input state |
| Enable Input EN+/- | Inputs: optically isolated, 5 - 24 volts, min. pulse width 100 us., max. pulse frequency 10 KHz; enables or disables the drive amplifier |
| Output OUT+/- | Open Collector, 30 volts, 100 mA max, max. pulse frequency 10 KHz; closes when the drive encounters an error, open when the drive is operating normally |

Switch Selections

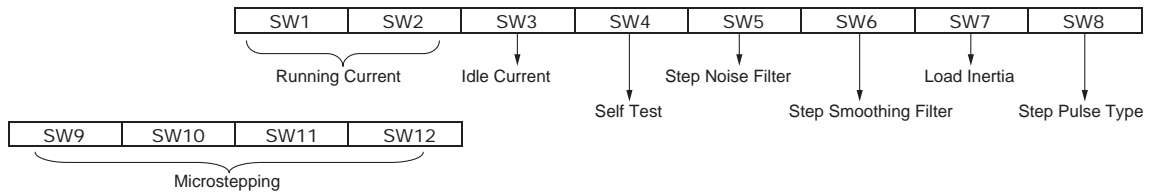

Running current - output current is set by SW1 & SW2 with a total of 4 settings: 50%, 70%, 90% and 100% of the running current.

Idle Current - can be set by SW3 for 50% of running value to reduce motor and drive heating, or for 90% when a high holding torque is required.

Self test - set by SW4 to check the physical operation of the motor.

Input Noise Filter - set by SW5 this filters out unwanted electrical noise. The frequency of the filter can be set to 150KHz or 2MHz.

Step Smoothing Filter - also called microstep emulation, smooth motion can be obtained from coarse command signals by setting SW6 to ON.

Anti-Resonance/Electronic Damping - setting SW7 for the proper inertia load, low (OFF) or high (ON), can greatly improve the motor's performance.

Step Pulse Type - SW8 allows the motor to be used with either CW/CCW pulse type command signals (ON), or STEP/DIR pulse type signals (OFF).

Microstep resolution - SW9, SW10, SW11, and SW12 set the microstep resolution at one of 16 settings: 200, 400, 800, 1600, 3200, 6400, 12800, 25600, 1000, 2000, 4000, 5000, 8000, 10000, 20000, or 25000 steps/rev.

| | |
|---------------|---|
| Mass | STM17R-1□: 280 g STM17R-2□: 360 g STM17R-3□: 440 g |
| Rotor Inertia | STM17R-1□: 38 g·cm ² STM17R-2□: 57 g·cm ² STM17R-3□: 82 g·cm ² |

Encoder Option

STM-R models can be ordered with an optional 1000 line incremental encoder mounted to the rear shaft of the unit. This encoder can be connected to the external controller for position verification and enhanced performance, depending on the features of the controller.

Electrical Specification

| | |
|--------------------------|-----------------------------------|
| Resolution | 4000 Counts/Rev(1000 Line) |
| Supply Current (no load) | Typ 56mA/Max 59mA |
| Output Voltage Low | 0.4V@20mA Max. |
| Output Voltage High | 2.4V@-20mA Min. |

A leads B for clockwise shaft rotation, and B leads A for counterclockwise rotation viewed from direction H

Mating Connectors

Housing: Molex# 15-04-5104



Crimp: Molex# 14-60-0058

Crimp Tool: Molex# 62100-0700

Accessories

Encoder cable packed together with motor


| P/N | Length |
|----------|--------|
| 1001-100 | 1m |
| 1009-500 | 5m |

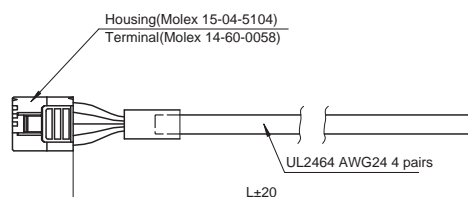

| Pin. | Sign | Color |
|------|--------|--------------|
| 1 | NC | |
| 2 | Ground | Green White |
| 3 | I- | Orange White |
| 4 | I+ | Orange |
| 5 | A- | Blue White |
| 6 | A+ | Blue |
| 7 | +5V DC | Green |
| 8 | NC | |
| 9 | B- | Brown White |
| 10 | B+ | Brown |




Dimensions(Unit:mm)

Visit www.moonsindustries.com to get the 3D drawing.

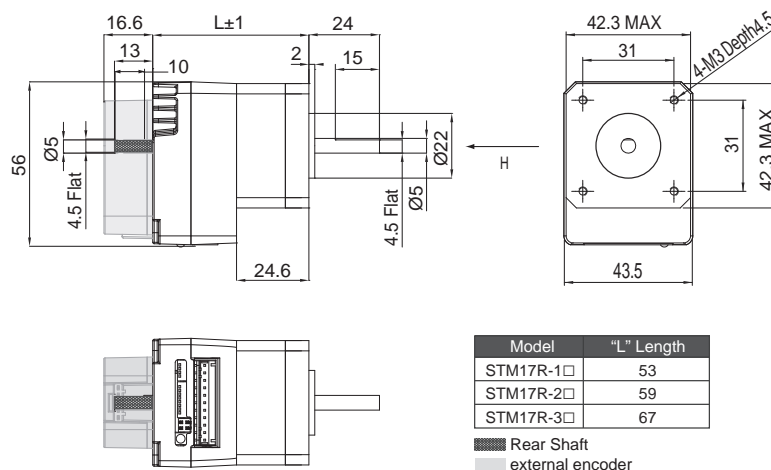


| | |
|--------------------------|---------------|
| Efficient Integrated TSM | Motor & Drive |
| Integrated SSM | Motor & Drive |
| IP65 Integrated TXM | Motor & Drive |
| RS | Motor & Drive |
| SS | Motor & Drive |
| Integrated Stepper Motor | |
| STM-R | |
| STM | |
| SWM | |
| AC Input | |
| SRAC | |
| STAC | |
| 2-Phase Stepper Drive | |
| SR | |
| DC Input | |
| STF | |
| Field Bus | |
| ST | |
| 3-Phase Stepper Drive | |
| AC Input | |
| DC Input | |
| 2-Phase Stepper Drive | |
| Stepper Motor | |
| 3-Phase | |
| UL | |
| Power Supplies | |
| Accessories | |
| Cables | |
| Software | |
| Appendix | |
| Glossary | |

Torque Curves

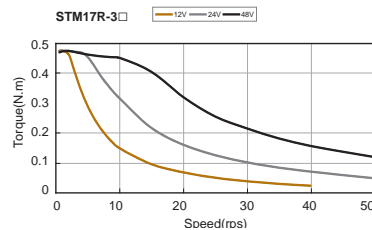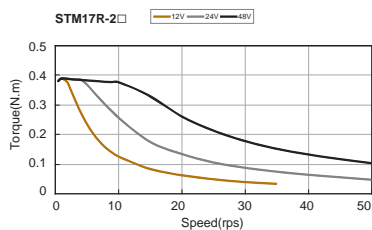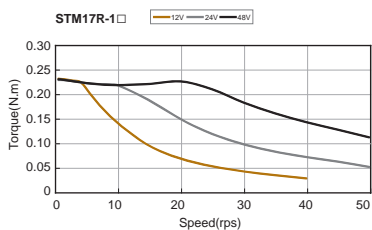

Numbering System

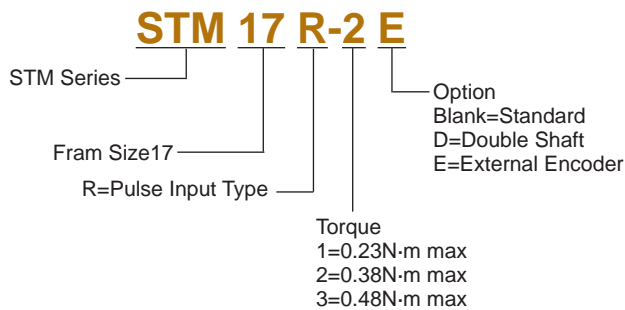


Ordering Information

| Model | Standard | Double shaft | External Encoder |
|-----------|----------|--------------|------------------|
| STM17R-1 | ✓ | | |
| STM17R-1D | | ✓ | |
| STM17R-1E | | | ✓ |
| STM17R-2 | ✓ | | |
| STM17R-2D | | ✓ | |
| STM17R-2E | | | ✓ |
| STM17R-3 | ✓ | | |
| STM17R-3D | | ✓ | |
| STM17R-3E | | | ✓ |

STM23R - Pulse Input Type Integrated Stepper Motor

The STM23R Integrated Motor is a cost effective, high performance, motor with the drive built in. It is based on advanced digital current control technology, and features high torque, low noise, and low vibration. Operational parameters are switch selectable.



■ Specifications

| Power Amplifier | |
|---|--|
| Amplifier Type | Dual H-Bridge, 4 Quadrant |
| Current Control | 4 state PWM at 16 KHz |
| Power Supply | External 12 - 70 volt power supply required |
| Input Voltage Range | 10 - 75 volts min/max (nominal 12 - 70 volts) |
| Protection | Over-voltage, over-current, under-voltage, over-temp, internal motor shorts (phase-to-phase, phase-to-ground) |
| Idle Current Reduction | Switch selectable for reduction to 50% or 90% of running current |
| Ambient Temperature | 0 - 40°C (32 - 104°F) when mounted to a suitable heat sink |
| Humidity | 90% non-condensing |
| Controller | |
| Current Control | Advanced digital current control provides excellent high speed torque |
| Speed Range | Speeds up to 3000 rpm |
| Auto Setup | Measures motor parameters to configure current control and anti-resonance gain settings |
| Encoder Feedback | Optional 1000 line external encoder, A/B/Z Differential Output |
| Step Input STEP+/- | Inputs: optically isolated, 5 - 24 volts, min. pulse width 250 ns., max. pulse frequency 2 MHz; motor executes one step on the falling edge of the STEP input signal |
| Direction Input DIR+/- | Inputs: optically isolated, 5 - 24 volts, min. pulse width 62.5 μs, max. pulse frequency 2 MHz; direction of rotation is controlled by the DIR input state |
| Enable Input EN+/- | Inputs: optically isolated, 5 - 24 volts, min. pulse width 100 us., max. pulse frequency 10 KHz; enables or disables the drive amplifier |
| Output OUT+/- | Open Collector, 30 volts, 100 mA max, max. pulse frequency 10 KHz; closes when the drive encounters an error, open when the drive is operating normally |
| Switch Selections | |
| | |
| Running current - output current is set by SW1 & SW2 with a total of 4 settings: 50%, 70%, 90% and 100% of the running current. | |
| Idle Current - can be set by SW3 for 50% of running value to reduce motor and drive heating, or for 90% when a high holding torque is required. | |
| Self test - set by SW4 to check the physical operation of the motor. | |
| Input Noise Filter - set by SW5 this filters out unwanted electrical noise. The frequency of the filter can be set to 150KHz or 2MHz. | |
| Step Smoothing Filter - also called microstep emulation, smooth motion can be obtained from coarse command signals by setting SW6 to ON. | |
| Anti-Resonance/Electronic Damping - setting SW7 for the proper inertia load, low (OFF) or high (ON), can greatly improve the motor's performance. | |
| Step Pulse Type - SW8 allows the motor to be used with either CW/CCW pulse type command signals (ON), or STEP/DIR pulse type signals (OFF). | |
| Microstep resolution - SW9, SW10, SW11, and SW12 set the microstep resolution at one of 16 settings: 200, 400, 800, 1600, 3200, 6400, 12800, 25600, 1000, 2000, 4000, 5000, 8000, 10000, 20000, or 25000 steps/rev. | |
| Mass | STM23R-2□: 850 g STM23R-3□: 1200 g |
| Rotor Inertia | STM23R-2□: 260 g·cm ² STM23R-3□: 460 g·cm ² |

- Efficient Integrated TSM
- Integrated SSM
- Step-Servo IP65 Integrated TXM
- Motor & Drive RS
- Motor & Drive SS
- Integrated Stepper Motor STM-R
- IP65 With Controller With Controller STM
- IP65 With Controller SWM
- AC Input SRAC
- 2-Phase Stepper Drive With Controller STAC
- Pulse Input SR
- DC Input Field Bus STF
- With Controller ST
- 3-Phase Stepper Drive AC Input
- DC Input
- 2-Phase Stepper Motor
- 3-Phase Stepper Motor
- UL
- Power Supplies
- Cables
- Accessories
- Software
- Appendix Glossary

Encoder Option

STM-R models can be ordered with an optional 1000 line incremental encoder mounted to the rear shaft of the unit. This encoder can be connected to the external controller for position verification and enhanced performance, depending on the features of the controller.

Electrical Specification

| | |
|--------------------------|-----------------------------------|
| Resolution | 4000 Counts/Rev(1000 Line) |
| Supply Current (no load) | Typ 56mA/Max 59mA |
| Output Voltage Low | 0.4V@20mA Max. |
| Output Voltage High | 2.4V@-20mA Min. |

A leads B for clockwise shaft rotation, and B leads A for counterclockwise rotation viewed from direction H

Mating Connectors



Housing: Molex# 15-04-5104

Crimp: Molex# 14-60-0058

Crimp Tool: Molex# 62100-0700

Encoder cable packed together with motor


| P/N | Length |
|----------|--------|
| 1001-100 | 1m |
| 1009-500 | 5m |

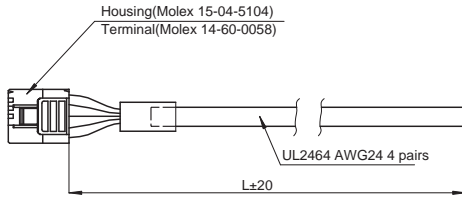


| Pin. | Sign | Color |
|------|--------|--------------|
| 1 | NC | |
| 2 | Ground | Green White |
| 3 | I- | Orange White |
| 4 | I+ | Orange |
| 5 | A- | Blue White |
| 6 | A+ | Blue |
| 7 | +5V DC | Green |
| 8 | NC | |
| 9 | B- | Brown White |
| 10 | B+ | Brown |

Dimensions(Unit:mm)


Visit www.moonsindustries.com to get the 3D drawing.

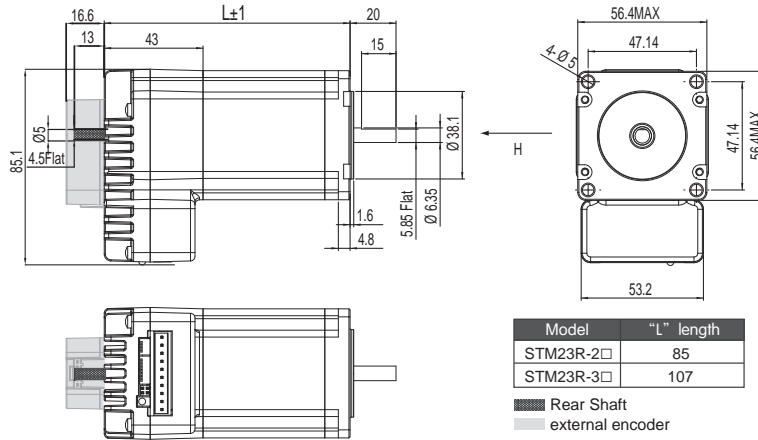

Torque Curves

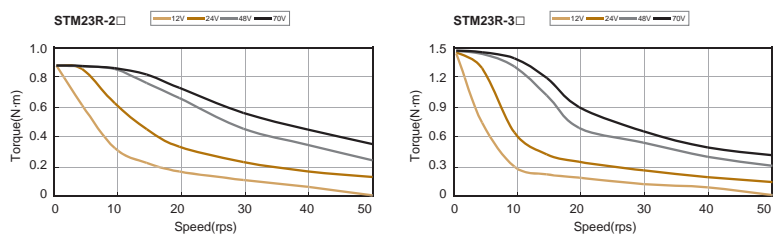

Numbering System

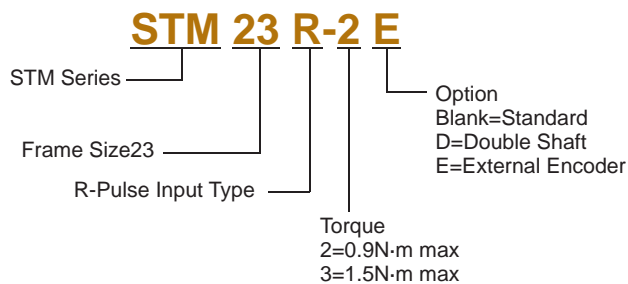

Ordering Information

| Model | Standard | Double shaft | External Encoder |
|-----------|----------|--------------|------------------|
| STM23R-2 | ✓ | | |
| STM23R-2D | | ✓ | |
| STM23R-2E | | | ✓ |
| STM23R-3 | ✓ | | |
| STM23R-3D | | ✓ | |
| STM23R-3E | | | ✓ |

- Efficient Integrated TSM
- Integrated SSM
- Step-Servo
 - IP65 Integrated TXM
 - Motor & Drive RS
 - Motor & Drive SS
- Integrated Stepper Motor
 - Pulse Input STM-R
 - With Controller With Controller STM
 - IP65 With Controller With Controller SWM
 - AC Input
 - Pulse Input With Controller SRAC
 - With Controller STAC
 - DC Input
 - Pulse Input SR
 - Field Bus With Controller STF
 - With Controller ST
- 3-Phase Stepper Drive
 - AC Input
 - DC Input
- Stepper Motor
 - 2-Phase
 - 3-Phase
 - UL
- Accessories
 - Power Supplies
 - Cables
- Appendix
 - Software
 - Glossary