



Tuleje montażowe

Tuleje TAPER LOCK

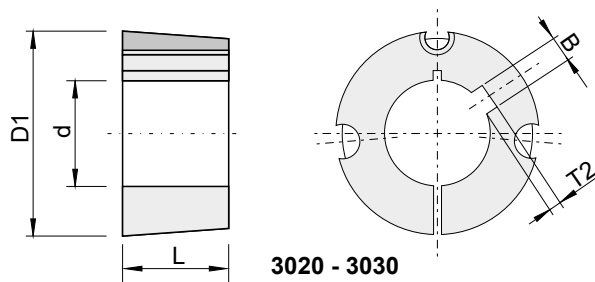

3020 - 3030

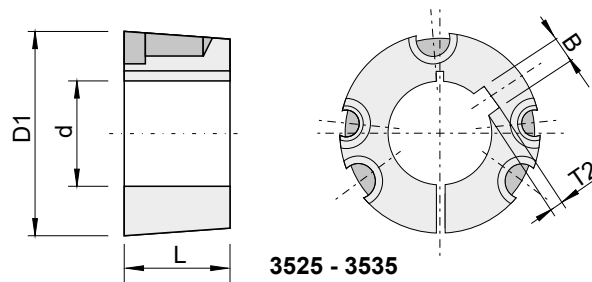

3525 - 3535

Tuleja 3020

średnica (D1) = 108
szerokość (L) = 50,8
typ śruby: 5,8" x 1" 1/4
moment dokręcania = 90 Nm

kod	d (ISO E8)	B	T2	[kg]
T0543	25	8	3,30	2,91
T0544	28	8	3,30	2,79
T0545	30	8	3,30	2,84
T0546	32	10	3,30	2,80
T0547	35	10	3,30	2,75
T0548	38	10	3,30	2,67
T0549	40	12	3,30	2,64
T0550	42	12	3,30	2,59
T0551	45	14	3,80	2,52
T0552	48	14	3,80	2,43
T0553	50	14	3,80	2,37
T0554	55	16	4,30	2,23
T0555	60	18	4,40	2,07
T0556	65	18	4,40	1,89
T0557	70	20	4,90	1,69
T0558	75	20	4,90	1,49

Tuleja 3030

średnica (D1) = 108
szerokość (L) = 76,2
typ śruby: 5,8" x 1" 1/2
moment dokręcania = 90 Nm

kod	d (ISO E8)	B	T2	[kg]
T0559	35	10	3,30	3,95
T0560	38	10	3,30	3,86
T0561	40	12	3,30	3,82
T0562	42	12	3,30	3,69
T0563	45	14	3,80	3,55
T0564	48	14	3,80	3,45
T0565	50	14	3,80	3,42
T0566	55	16	4,30	3,18
T0567	60	18	4,40	2,95
T0568	65	18	4,40	2,68
T0569	70	20	4,90	2,38
T0570	75	20	4,90	2,03

Tuleja 3525

średnica (D1) = 127
szerokość (L) = 64,9
typ śruby: 1,2" x 1" 1/2
moment dokręcania = 112 Nm

kod	d (ISO E8)	B	T2	[kg]
T0571	35	10	3,30	4,91
T0572	38	10	3,30	4,85
T0573	40	12	3,30	4,80
T0574	42	12	3,30	4,71
T0575	45	14	3,80	4,67
T0576	48	14	3,80	4,55
T0577	50	14	3,80	4,44
T0578	55	16	4,30	4,29
T0579	60	18	4,40	4,05
T0580	65	18	4,40	3,88
T0581	70	20	4,90	3,58
T0582	75	20	4,90	3,37
T0583	80	22	5,40	3,05
T0584	85	22	5,40	2,77
T0585	90	25	5,40	2,47

Tuleja 3535

średnica (D1) = 127
szerokość (L) = 88,9
typ śruby: 1,2" x 1" 1/2
moment dokręcania = 112 Nm

kod	d (ISO E8)	B	T2	[kg]
T0586	35	10	3,30	6,70
T0587	38	10	3,30	6,53
T0588	40	12	3,30	6,48
T0589	42	12	3,30	6,40
T0590	45	14	3,80	6,25
T0591	48	14	3,80	6,17
T0592	50	14	3,80	6,05
T0593	55	16	4,30	5,81
T0594	60	18	4,40	5,50
T0595	65	18	4,40	5,20
T0596	70	20	4,90	4,88
T0597	75	20	4,90	4,46
T0598	80	22	5,40	4,08
T0599	85	22	5,40	3,67
T0600	90	25	5,40	3,21