


Śruby i nakrętki kulowe

4.2 Precyzyjnie szlifowane śruby kulowe

Specyfikacja serii DFI

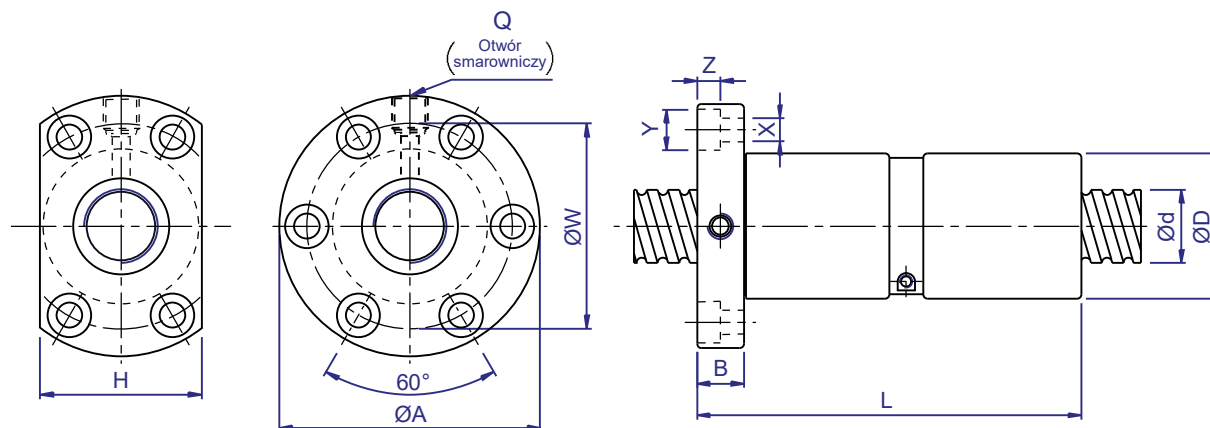

Jednostka: mm

Model	d	l	Da	Wymiary											Nośność		K N/μm
				D	A	B	L	W	H	X	Y	Z	Q	n	Ca	Coa	
															(N)	(N)	
DFI01604-4	16	4	2,381	30	49	10	80	39	34	4,5	8	4,5	M6	1x4	9 542	23 595	431
DFI01605-4*		5	3,175	30	49	10	100	39	34	4,5	8	4,5	M6	1x4	13 533	29 930	431
DFI02004-4	20	4	2,381	34	57	11	80	45	40	5,5	9,5	5,5	M6	1x4	10 454	29 292	500
DFI02005-4*		5	3,175	34	57	11	101	45	40	5,5	9,5	5,5	M6	1x4	15 210	38 001	510
DFI02504-4	25	4	2,381	40	63	11	80	51	46	5,5	9,5	5,5	M6	1x4	11 572	37 216	588
DFI02505-4*		5	3,175	40	63	11	101	51	46	5,5	9,5	5,5	M8	1x4	16 907	40 148	608
DFI0255T-4		5,08	3,175	40	63	11	101	51	46	5,5	9,5	5,5	M8	1x4	16 907	40 148	608
DFI02510-4		10	4,762	46	72	12	145	58	52	6,5	11	6,5	M6	1x4	28 969	71 540	667
DFI03204-4	32	4	2,381	46	72	12	80	58	52	6,5	11	6,5	M6	1x4	12 709	47 445	677
DFI03205-4*		5	3,175	46	72	12	102	58	52	6,5	11	6,5	M8	1x4	18 848	62 204	706
DFI0325T-4		5,08	3,175	46	72	12	102	58	52	6,5	11	6,5	M8	1x4	18 848	62 204	706
DFI03210-4*		10	6,35	54	88	15	162	70	62	9	14	8,5	M8	1x4	47 121	119 720	814
DFI04005-4*	40	5	3,175	56	90	15	105	72	64	9	14	8,5	M8	1x4	20 692	78 336	824
DFI04010-4*		10	6,35	62	104	18	165	82	70	11	17,5	11	M8	1x4	52 946	152 003	971
DFI05010-4*	50	10	6,35	72	114	18	171	92	82	11	17,5	11	M8	1x4	58 879	192 348	1 128
DFI06310-4*	63	10	6,35	85	131	22	182	107	95	14	20	13	M8	1x4	65 891	248 677	1 324
DFI08010-4	80	10	6,35	105	150	22	182	127	115	14	20	13	M8	1x4	72 040	313 352	1 530

*Dostępne z gwintem lewym.

Uwaga: Przy zamówieniu nakrętek podwójnych proszę o kontakt z TBI MOTION