
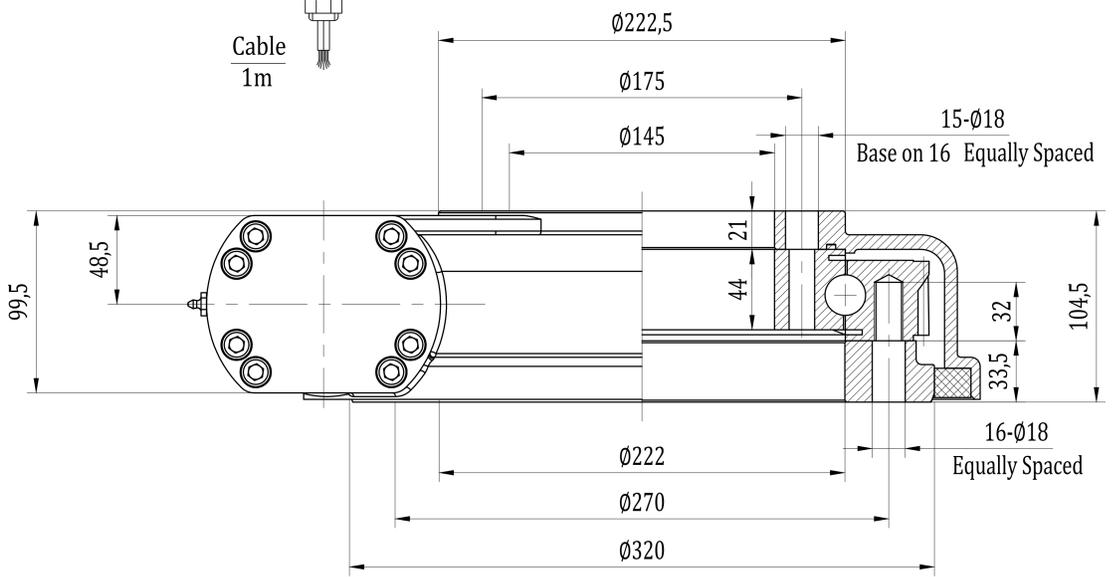


Slewing Drive Performance Parameters		
Rated Output Speed	2 rpm	
Output Torque	488 N.m	360 lbf.ft
Tilting Moment	33.9 kN.m	25x10 ³ lbf.ft
Holding Torque	38.7 kN.m	29x10 ³ lbf.ft
Static Axial Load Rating	338 kN	76x10 ³ lbf
Static Radial Load Rating	135 kN	30x10 ³ lbf
Gear Ratio	61:1	
Precision	≤0.17°	
24VDC Planetary Reducer Motor Performance Data (24/1200/20)		
Rated Output Torque	20 N.m	
Rated Output Speed	120rpm	
IP Class	IP 65	
Rated Current	≤20 A	
Temperature	-40 - +60°C	

Wire Define	
Pin 1 (black)	motor -
Pin 2 (red)	motor +
Pin E (yellow)	GND

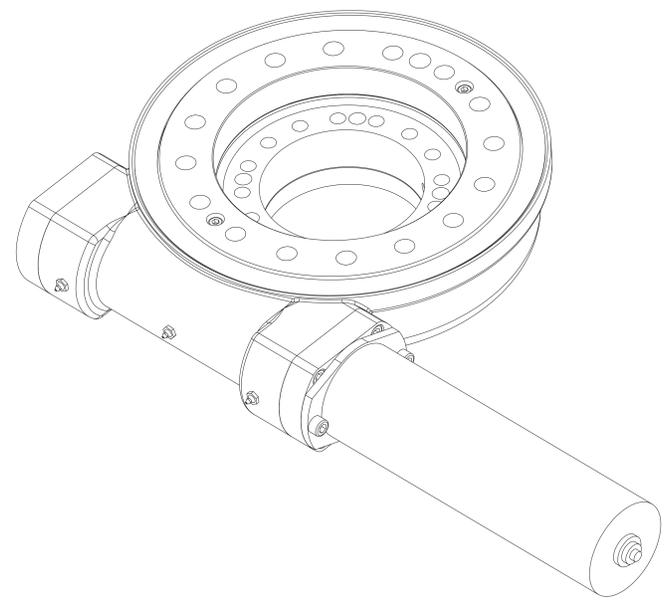

		 www.pivexin-tech.pl	
<small>ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.</small>	WEIGHT	SCALE	Obrotnica solarna supraBox solar 9C z silnikiem DC 24V IP65
	62 kg	1 : 3	
	SIZE	A3	
SYMBOLS ISO		SHEET	1 / 1