


# Koła pod pasy klinowe

Koła pod pasy klinowe pod tuleję TAPER LOCK

SPC/3

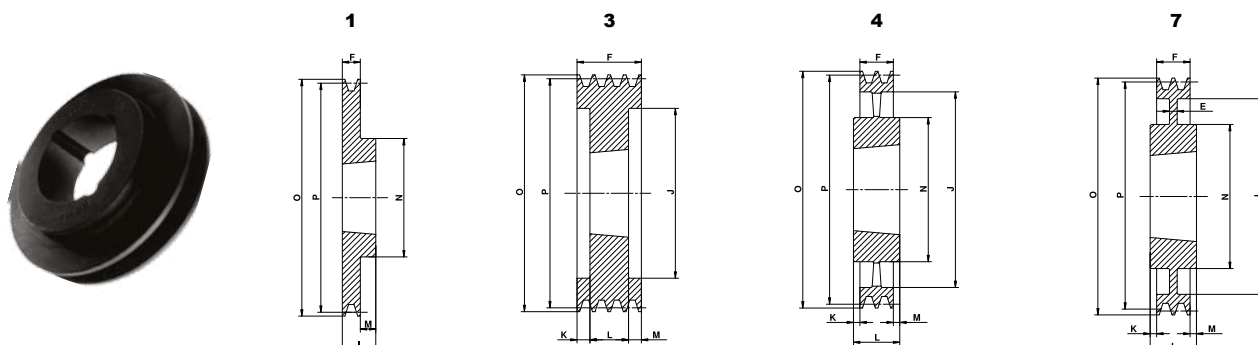

Materiał: żeliwo EN-GJL-200 UNI EN1561

| kod   | typ        | ilość rowków | P    | O      | rodzaj wykonania | tuleja TAPER LOCK | otwór mac | E  | F  | J    | K    | L   | M    | N   |
|-------|------------|--------------|------|--------|------------------|-------------------|-----------|----|----|------|------|-----|------|-----|
| K0639 | SPC 200/3  | 3            | 200  | 209,6  | 3                | 2517              | 60        | -  | 85 | 144  | 20   | 45  | 20   | -   |
| K0640 | SPC 212/3  | 3            | 212  | 221,6  | 3                | 3020              | 75        | -  | 85 | 156  | 17   | 51  | 17   | -   |
| K0641 | SPC 224/3  | 3            | 224  | 233,6  | 3                | 3020              | 75        | -  | 85 | 168  | 17   | 51  | 17   | -   |
| K0642 | SPC 236/3  | 3            | 236  | 245,6  | 3                | 3020              | 75        | -  | 85 | 180  | 17   | 51  | 17   | -   |
| K0643 | SPC 250/3  | 3            | 250  | 259,6  | 3                | 3020              | 75        | -  | 85 | 194  | 17   | 51  | 17   | -   |
| K0644 | SPC 265/3  | 3            | 265  | 274,6  | 1                | 3535              | 90        | -  | 85 | 209  | -    | 89  | 4    | 175 |
| K0645 | SPC 280/3  | 3            | 280  | 289,6  | 1                | 3535              | 90        | -  | 85 | 224  | -    | 89  | 4    | 175 |
| K0646 | SPC 300/3  | 3            | 300  | 309,6  | 7                | 3535              | 90        | 20 | 85 | 244  | 2    | 89  | 2    | 175 |
| K0647 | SPC 315/3  | 3            | 315  | 324,6  | 7                | 3535              | 90        | 20 | 85 | 259  | 2    | 89  | 2    | 175 |
| K0648 | SPC 335/3  | 3            | 335  | 344,6  | 7                | 3535              | 90        | 20 | 85 | 279  | 2    | 89  | 2    | 175 |
| K0649 | SPC 355/3  | 3            | 355  | 364,6  | 7                | 3535              | 90        | 20 | 85 | 299  | 2    | 89  | 2    | 175 |
| K0650 | SPC 375/3  | 3            | 375  | 384,6  | 7                | 3535              | 90        | 25 | 85 | 319  | 2    | 89  | 2    | 175 |
| K0651 | SPC 400/3  | 3            | 400  | 409,6  | 7                | 3535              | 90        | 17 | 85 | 344  | 2    | 89  | 2    | 175 |
| K0652 | SPC 425/3  | 3            | 425  | 434,6  | 7                | 3535              | 90        | 17 | 85 | 369  | 2    | 89  | 2    | 175 |
| K0653 | SPC 450/3  | 3            | 450  | 459,6  | 4                | 3535              | 90        | -  | 85 | 394  | 2    | 89  | 2    | 175 |
| K0654 | SPC 475/3  | 3            | 475  | 484,6  | 4                | 3535              | 90        | -  | 85 | 419  | 2    | 89  | 2    | 175 |
| K0655 | SPC 500/3  | 3            | 500  | 509,6  | 4                | 3535              | 90        | -  | 85 | 444  | 2    | 89  | 2    | 175 |
| K0656 | SPC 530/3  | 3            | 530  | 539,6  | 4                | 3535              | 90        | -  | 85 | 474  | 2    | 89  | 2    | 175 |
| K0657 | SPC 560/3  | 3            | 560  | 569,6  | 4                | 3535              | 90        | -  | 85 | 504  | 2    | 89  | 2    | 175 |
| K0658 | SPC 630/3  | 3            | 630  | 639,6  | 4                | 4040              | 100       | -  | 85 | 574  | 8,5  | 102 | 8,5  | 210 |
| K0659 | SPC 800/3  | 3            | 800  | 809,6  | 4                | 4545              | 110       | -  | 85 | 737  | 14,5 | 114 | 14,5 | 242 |
| K0660 | SPC 1000/3 | 3            | 1000 | 1009,6 | 4                | 5050              | 125       | -  | 85 | 937  | 21   | 127 | 21   | 267 |
| K0661 | SPC 1250/3 | 3            | 1250 | 1259,6 | 4                | 5050              | 125       | -  | 85 | 1187 | 21   | 127 | 21   | 267 |