


Recommended shaft end shape (Supported-side) for Support Units types FF,EF,BF,AF,LF

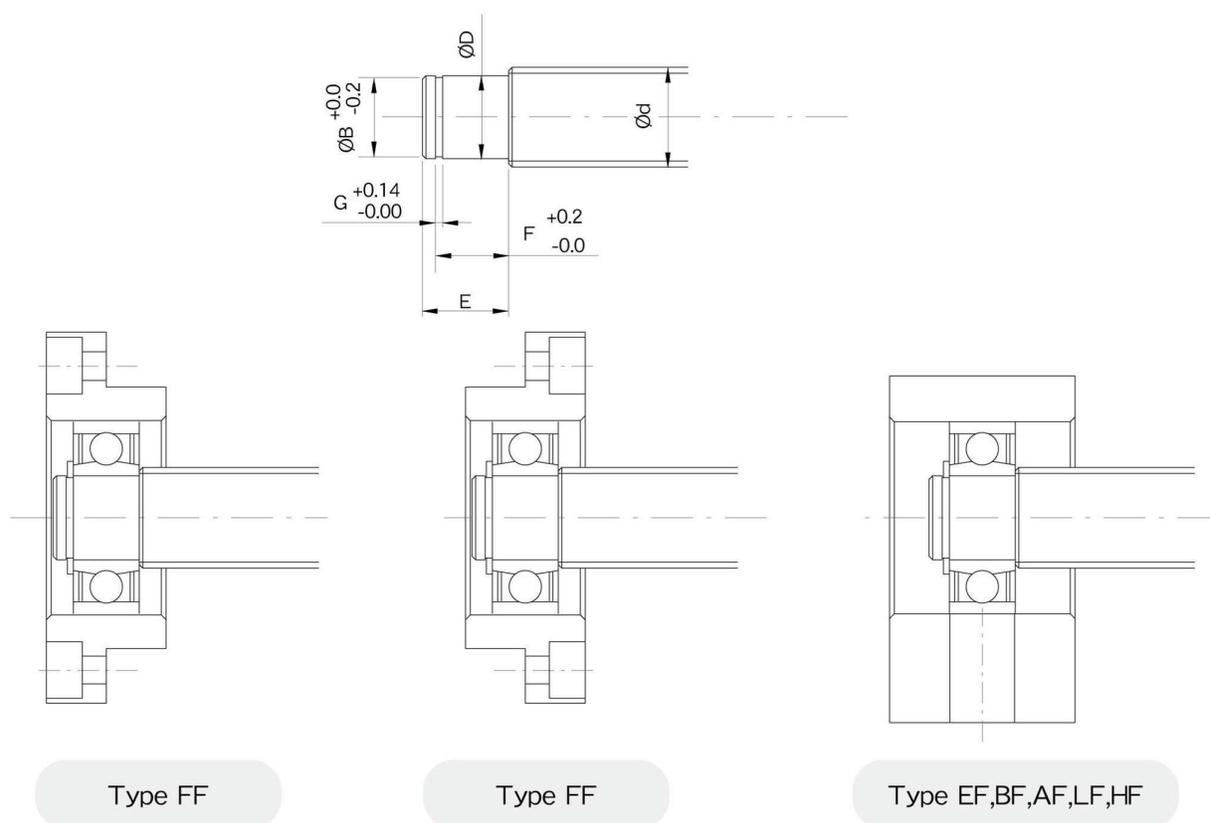

Unit : mm

Support unit model No.					Ballscrew shaft OD	Shaft support portion OD					
Type FF	Type EF	Type BF	Type AF	Type LF	d	D	E	B	F	G	
FF06	EF06	-	-	-	8	6 -0.008 -0.015	9	5.7	6.8	0.8	
-	EF08	-	-	LF08	10	6 -0.008 -0.015	9	5.7	6.8	0.8	
FF10	EF10	BF10	AF10	-	12/14/15	8 -0.008 -0.015	10	7.6	7.9	0.9	
FF12	EF12	BF12	AF12	LF12	14/15/16	10 -0.008 -0.015	11	9.6	9.15	1.15	
FF15	EF15	BF15	AF15	LF15	18/20	15 -0.008 -0.017	13	14.3	10.15	1.15	
FF17	-	BF17	-	-	20/25	17 -0.008 -0.017	16	16.2	13.15	1.15	
-	-	BF20	-	-	25/28/30	20 -0.010 -0.020	16	19	13.35	1.35	
FF20	EF20	-	AF20	-			19				15.35
FF25	-	BF25	AF25	-	30/32/36	25 -0.010 -0.020	20	23.9	16.35	1.35	
FF30	-	BF30	-	-	36/40	30 -0.010 -0.020	21	28.6	17.75	1.75	
-	-	BF35	-	-	40/45	35 -0.012 -0.025	22	33	18.75	1.75	
-	-	BF40	-	-	50	40 -0.012 -0.025	23	38	19.95	1.95	

Note : Shaft end machining of SF, HF same as BF.