


Recommended shaft end shape (Fixed-side) for Support Units types FK,FKA,EK,AK,LK

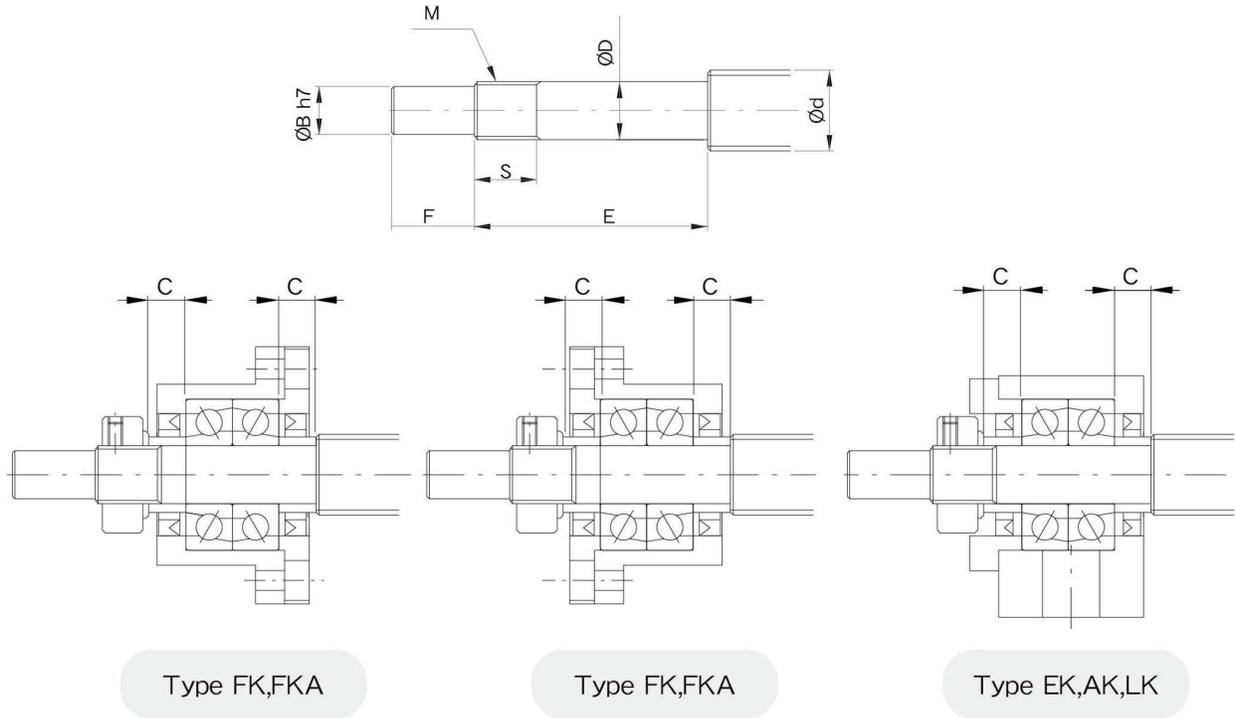

Unit : mm

Support unit model No.				Ballscrew shaft OD	Shaft support portion OD			Metric screw thread		Length of Sleeve	
Type FK,FKA	Type EK	Type AK	Type LK	d	D	B	E	F	M	S	C
FK05	EK05	-	-	8	5 -0.008 -0.015	4	23	6	M5x0.5	7	3.5
FK06 FKA06	EK06	-	-	8	6 -0.008 -0.015	4	28	8	M6x0.75	8	5
FK08 FKA08	EK08	-	LK08	10/12	8 -0.008 -0.015	6	32	9	M8x1	10	5.5
FK10 FKA10	EK10	AK10	LK10	12/14/15	10 -0.008 -0.015	8	36	15	M10x1	12	5.5
FK12 FKA12	EK12	AK12	LK12	14/15/16	12 -0.008 -0.017	10	36	15	M12x1	12	5.5
FK15 FKA15	EK15	AK15	LK15	18/20	15 -0.008 -0.017	12	48	20	M15x1	13	10
FKA15H											6
FK17	-	-	-	20/25	17 -0.008 -0.017	15	59	23	M17x1	17	10
FK20 FKA20	EK20	AK20	-	25/28/30	20 -0.010 -0.020	17	64	25	M20x1	16	11
FKA20L							53				8
FK25	-	AK25	-	30/32/36	25 -0.010 -0.020	20	76	30	M25x1.5	20	14
FK30	-	-	-	36/40	30 -0.010 -0.020	25	73	38	M30x1.5	25	9