

PM STEP MOTORS



MOONS'
moving in better ways

Product Overview	Product List	03	Product Overview
	Structure	04	
	Operating Principles	05	
Rotary Motors	Series 8PM020S - Ø8mm, S, 18°	07	Rotary Motors
	Series 10PM020S - Ø10mm, S, 18°	09	
	Series 15PM020S - Ø15mm, S, 18°	11	
	Series 15PM020D - Ø15mm, D, 18°	12	
	Series 20PM020S - Ø20mm, S, 18°	13	
	Series 20PM020L - Ø20mm, L, 18°	15	
	Series 25PM024S - Ø25mm, S, 15°	17	
	Series 25PM048S - Ø25mm, S, 7.5°	19	
	Series 25PM024L - Ø25mm, L, 15°	21	
	Series 25PM048L - Ø25mm, L, 7.5°	23	
	Series 28PM024L - Ø28mm, L, 15°	25	
	Series 35PM024S - Ø35mm, S, 15°	27	
	Series 35PM048S - Ø35mm, S, 7.5°	29	
	Series 35PM024L - Ø35mm, L, 15°	31	
	Series 35PM048L - Ø35mm, L, 7.5°	33	
	Series 42PM048S - Ø42mm, S, 7.5°	35	
	Series 42PM096S - Ø42mm, S, 3.75°	37	
	Series 42PM048L - Ø42mm, L, 7.5°	41	
Series 42PM096L - Ø42mm, L, 3.75°	43		
Linear Actuators	Series 20LN024M - Ø20mm, M, 15°	49	Linear Actuators
	Series 20LN024L - Ø20mm, L, 15°	50	
	Series 25LN024L - Ø25mm, L, 15°	51	
	Series 25LN024S - Ø25mm, S, 15°	52	
	Series 28L024L - Ø28mm, L, 15°	53	
	Series 35LN024L - Ø35mm, L, 15°	54	
	Series 35LN024L - Ø35mm, L, 15°	55	
Gearmotors	Series PG15L	57	Gearmotors
	Series PG16L	58	
	Series PG22L	59	
Technical	Speed-Torque Characteristics	63	Technical
	About rated current	64	
	Conversion Factors	65	

Product List

Product Line Up

Series	Outer Diameter (mm)	Length (mm)	Step No.	Step Angle (°)
8PM020S	8	8.5	20	18
10PM020S	10	8.5	20	18
15PM020S	15	11.4	20	18
15PM020D	15	20.1	20	18
20PM020S	20	14.3	20	18
20PM020L	20	19.3	20	18
25PM024S	25	12.5	24	15
25PM048S	25	12.5	48	7.5
25PM024L	25	17.0	24	15
25PM048L	25	17.0	48	7.5
28PN024L	28	15.0	24	15
35PM024S	35	15.3	24	15
35PM048S	35	15.3	48	7.5
35PM024L	35	21.3	24	15
35PM048L	35	21.3	48	7.5
42PM048S	42	15.3	48	7.5
42PM096S	42	15.3	96	3.75
42PM048L	42	21.3	48	7.5
42PM096L	42	21.3	96	3.75

Series	Outer Diameter (mm)	Shaft Stroke (mm)	Step No.	Step Travel (mm)
20LN024M	20	20	24	0.0254
20LN024L	20	12.5	24	0.0254
25LN024L	25	20	24	0.0508
25LN024S	25	13	24	0.0254
28LN024L	28	13	24	0.0420
35LN024L	35	36	24	0.0333
35LN024L	35	12	24	0.0333

Model Numbering System

42 PM 048 L 1 - 003 02

Base frame code

Outer diameter size: 42mm diameter = 42

Motor type code

PM: permanent magnet step motor

LN: permanent magnet linear step motor

Step code

020: 20 steps per rotation, 18° step angle

024: 24 steps per rotation, 15° step angle

048: 48 steps per rotation, 7.5° step angle

096: 96 steps per rotation, 3.75° step angle

Length code

S: short version

M: middle version

L: long version

Magnet grade code

Resistance code

Winding resistance: 30hm = 003


Mechanical code

Structure

Rotary Motors




Linear Actuators

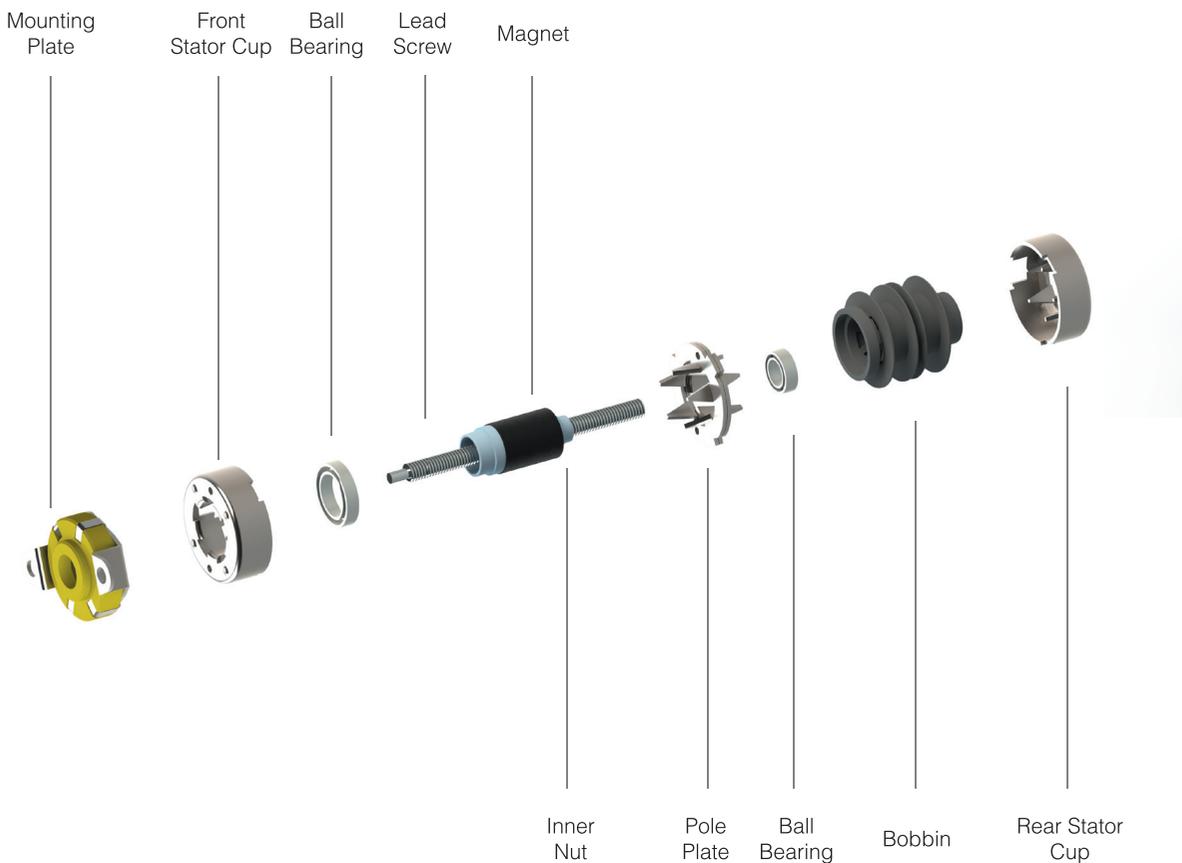

Operating Principles

Schematic Diagrams

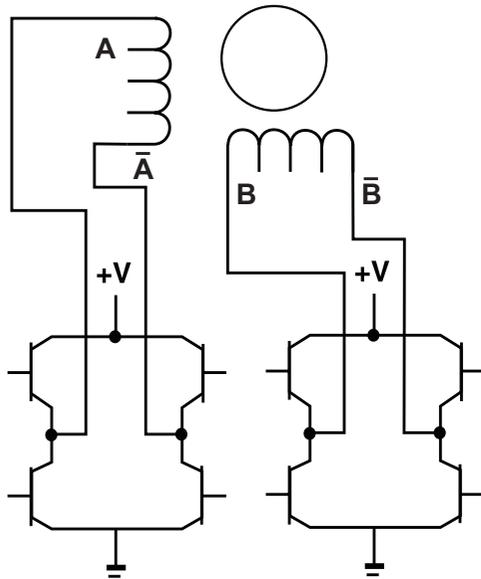

Step Sequence

CONNECTOR PIN LOCATION							
PIN NO.	COLOR	CCW ← → CW (SEEN FROM FLANGE SIDE)				PHASE	
		ON	ON		ON		
1	BLACK	ON	ON		ON	A	
2	YELLOW			ON	ON	\bar{A}	
3	ORANGE		ON	ON		B	
4	BROWN	ON			ON	\bar{B}	

Operating Principles


In response to each individual control pulse and direction signal, the drive applies power to the motor windings to cause the rotor to take a step forward, a step in reverse, or hold in position.

For example, in a 7.5 degree two phase step motor: When both phases are energized with DC current, the motor will stop rotating and hold in position. The maximum torque the motor can hold in place with rated DC current, is the rated holding torque. If the current in one phase is reversed, the motor will move 1 step (7.5 degrees) in a known direction. If the current in the other phase had been reversed, the motor would move 1 step (7.5 degrees) in the other direction. As current is reversed in each phase in sequence, the motor continues to step in the desired direction. These steps are very accurate. For a 7.5 degree step motor, there are exactly 48 steps in one revolution.

Two phase stepping motors are furnished with two types of windings: bipolar or unipolar. In a bipolar motor there is one winding on each phase. The motor moves in steps as the current in each winding is reversed. This requires a drive with eight electronic switches. In a unipolar motor there are two windings on each phase. The two windings on each phase are connected in opposite directions. Phase current is reversed by turning on alternate windings on the same phase. This requires a drive with only four electronic switches. Bipolar operation typically provides 40% more holding torque than unipolar, because 100% of the winding is energized in the bipolar arrangement.

Rotary Motors

- Ø8mm
- Ø10mm
- Ø15mm
- Ø20mm
- Ø25mm
- Ø28mm
- Ø35mm
- Ø42mm

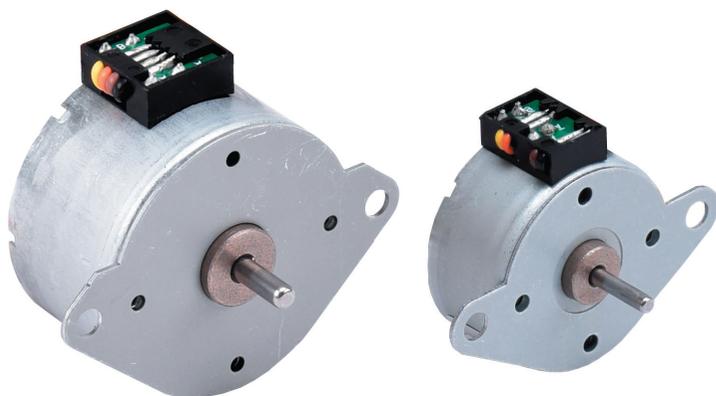

8PM020S - Ø8mm, S, 18°

Product Overview



- Phases 2
- Steps / Revolution 18°
- Shaft Load
 - Axial
 - Radial 0.2N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -30°C to +70°C
- Insulation Class E, 130°C
- Insulation Resistance 50 MegOhms


Rotary Motors

Motor Data


Model Number			8PM020S1-02001
Length			8.5mm (0.33in.)
Step Angle	°		18
Rated Current	Amps		0.25
Holding Torque	10 ⁻⁴ Nm	Typ.	4
	oz-in	Typ.	0.06
Coil Resistance	Ohms	±10% @ 20°C	20
Coil Inductance	mH	Typ.	2.8
Detent Torque	10 ⁻⁴ Nm	Max.	1.5
	oz-in	Max.	0.02
Rotor Inertia	gcm ²		0.1
	10 ⁻⁴ oz-in ²		5.5
Motor Weight	g		2.2
	Lbs		0.005

^ Preferred model

Dimensions: mm

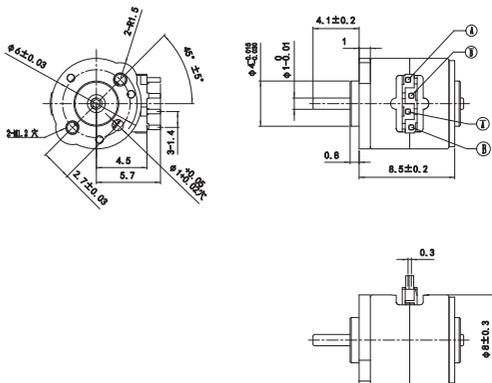

Linear Actuators

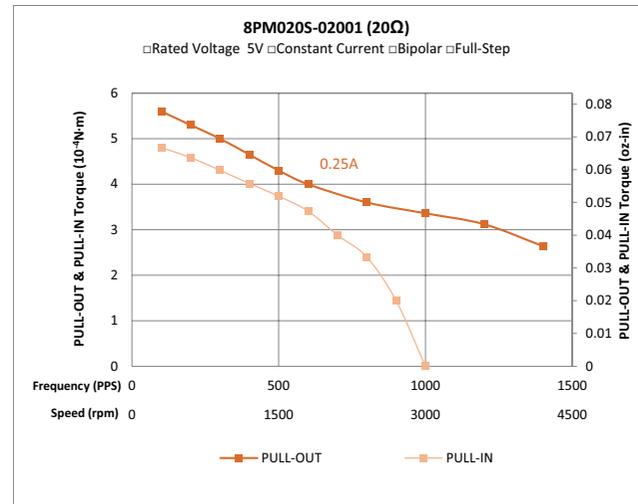

Gearmotors

Technical

8PM020S - Ø8mm, S, 18°



- Phases 2
- Steps / Revolution 18°
- Shaft Load
 - Axial
 - Radial 0.2N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -30°C to +70°C
- Insulation Class E, 120°C
- Insulation Resistance 50 MegOhms

Product Overview



Rotary Motors

Motor Data

Model Number		8PM020S1-05001	
Length		8.82 (0.35in.)	
Step Angle	°		18
Rated Current	Amps		0.1
Holding Torque	10 ⁻⁴ Nm	Typ.	4
	oz-in	Typ.	0.06
Coil Resistance	Ohms	±10% @ 20°C	50
Coil Inductance	mH	Typ.	18.2
Detent Torque	10 ⁻⁴ Nm	Max.	1.5
	oz-in	Max.	0.02
Rotor Inertia	gcm ²		0.1
	10 ⁻⁴ oz-in ²		5.5
Motor Weight	g		4
	Lbs		0.009

^ Preferred model

Dimensions: mm

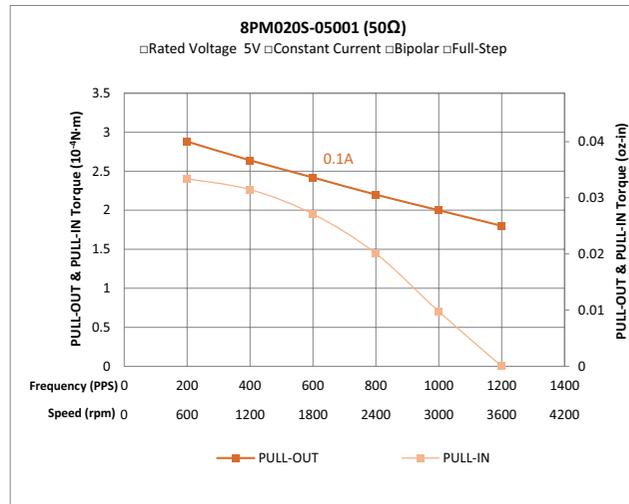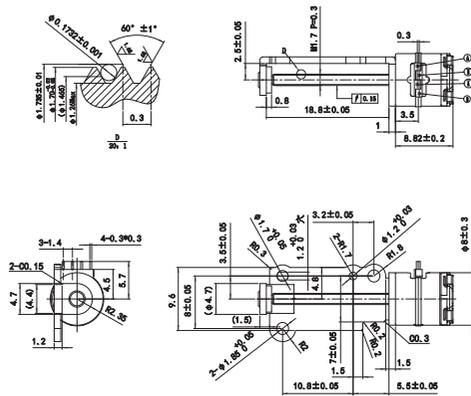

Linear Actuators

Gearmotors

Technical

10PM020S - Ø10mm, S, 18°



- 相数 2
- 步数/每圈 18°
- 轴向 轴向
- 径向 1.5N
- IP等级 40
- 认证 RoHS
- 环境温度 -20°C to +60°C
- 绝缘等级 E, 120°C
- 绝缘电阻 50 MegOhms

Product Overview



Rotary Motors

Motor Data

Model Number		10PM020S1-05001	
Length		9.6 (0.38in.)	
Step Angle	°		18
Rated Current	Amps		0.09
Holding Torque	10 ⁻⁴ Nm	Typ.	6
	oz-in	Typ.	0.08
Coil Resistance	Ohms	±10% @ 20°C	55
Coil Inductance	mH	Typ.	7.2
Detent Torque	10 ⁻⁴ Nm	Max.	2.5
	oz-in	Max.	0.03
Rotor Inertia	gcm ²		0.3
	10 ⁻⁴ oz-in ²		16.4
Motor Weight	g		8
	Lbs		0.018

^ Preferred model

Dimensions: mm

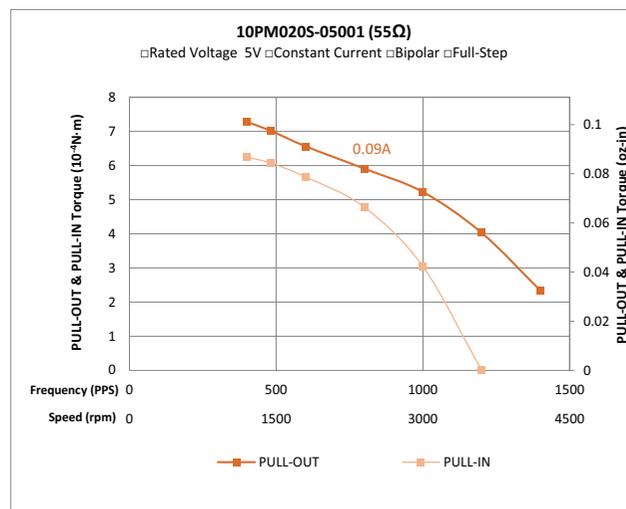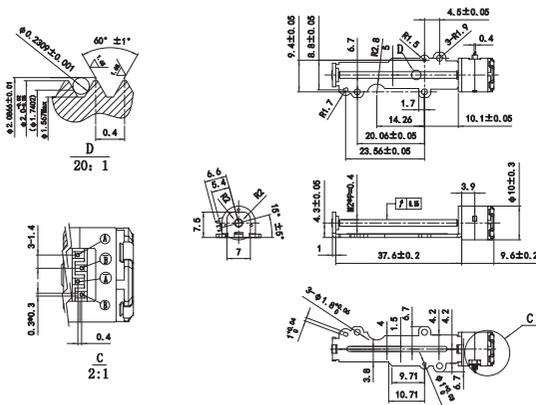


Linear Actuators

Gearmotors

Technical

15PM020S - Ø15mm, S, 18°





- Phases 2
- Steps / Revolution 20(18°)
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data


Model Number		15PM020S0-01002	
Length		11.35mm (0.45in.)	
Step Angle	°		18
Rated Current	Amps		0.48
Holding Torque	10 ⁻⁴ Nm	Typ.	36
	oz-in	Typ.	0.5
Coil Resistance	Ohms	±10% @ 20°C	10.5
Coil Inductance	mH	Typ.	2.8
Detent Torque	10 ⁻⁴ Nm	Max.	13
	oz-in	Max.	0.18
Rotor Inertia	gcm ²		0.039
	10 ⁻⁴ oz-in ²		2.1
Motor Weight	g		9
	Lbs		0.02

^ Preferred model

Dimensions: mm

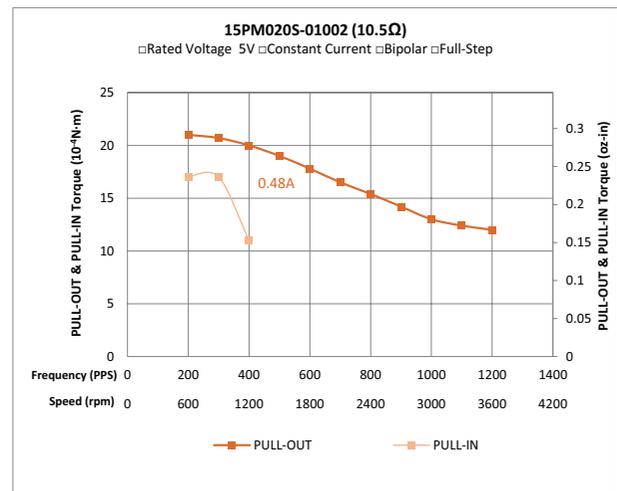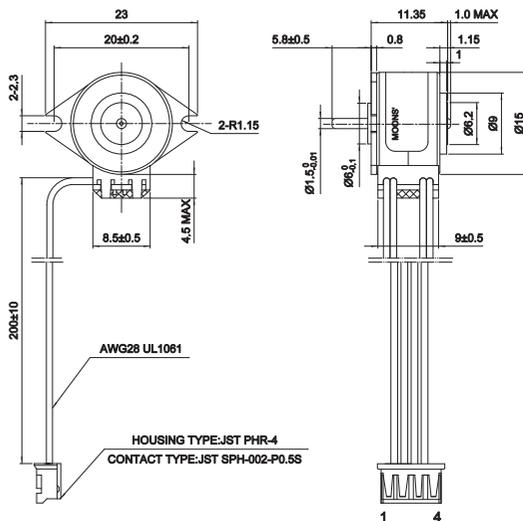

15PM020D - Ø15mm, S, 18°



- Phases 2
- Steps / Revolution 20(18°)
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Product Overview



Rotary Motors

Motor Data

Model Number		15PM020D0-00902	
Length		19.6mm (0.79in.)	
Step Angle	°		18
Rated Current	Amps		0.6
Holding Torque	10 ⁻⁴ Nm	Typ.	72
	oz-in	Typ.	1.0
Coil Resistance	Ohms	±10% @ 20°C	9.6
Coil Inductance	mH	Typ.	2.65
Detent Torque	10 ⁻⁴ Nm	Max.	14
	oz-in	Max.	0.19
Rotor Inertia	gcm ²		
	10 ⁻⁴ oz-in ²		
Motor Weight	g		18
	Lbs		0.04

^ Preferred model

Dimensions: mm

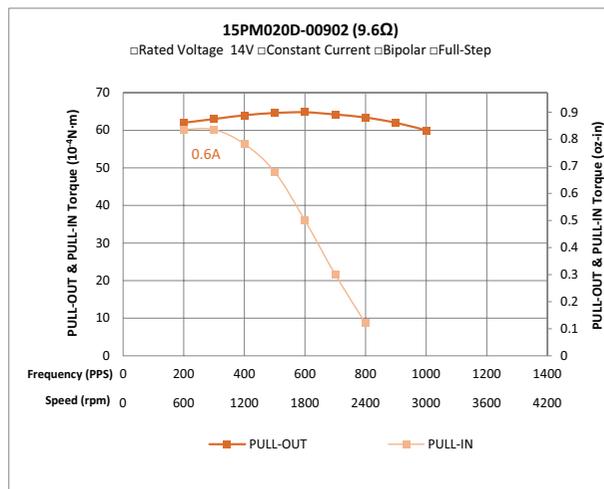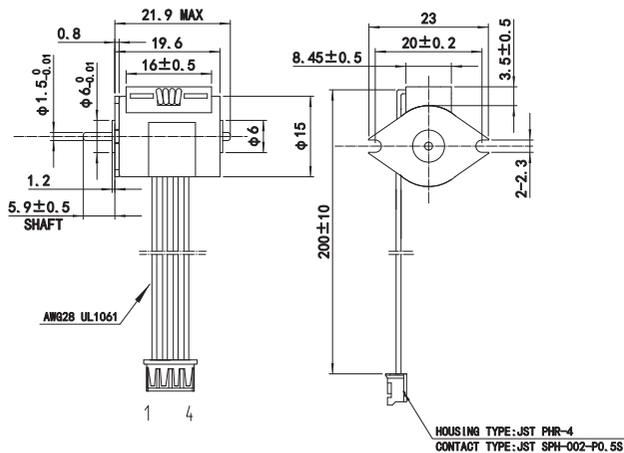

Linear Actuators

Gearmotors

Technical

20PM020S - Ø20mm, S, 18°




- Phases 2
- Steps / Revolution 20(18°)
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data


Model Number			20PM020S0-01002	20PM020S0-02501
Length			14.3mm (0.56in.)	
Step Angle	°		18	
Rated Current	Amps		0.33	0.21
Holding Torque	10 ⁻⁴ Nm	Typ.	85	85
	oz-in	Typ.	1.18	1.18
Coil Resistance	Ohms	±10% @ 20°C	10.3	25
Coil Inductance	mH	Typ.	5.1	11.7
Detent Torque	10 ⁻⁴ Nm	Max.	18	18
	oz-in	Max.	0.25	0.25
Rotor Inertia	gcm ²		0.25	0.25
	10 ⁻⁴ oz-in ²		13.7	13.7
Motor Weight	g		21	
	Lbs		0.046	

^ Preferred model






Dimensions: mm

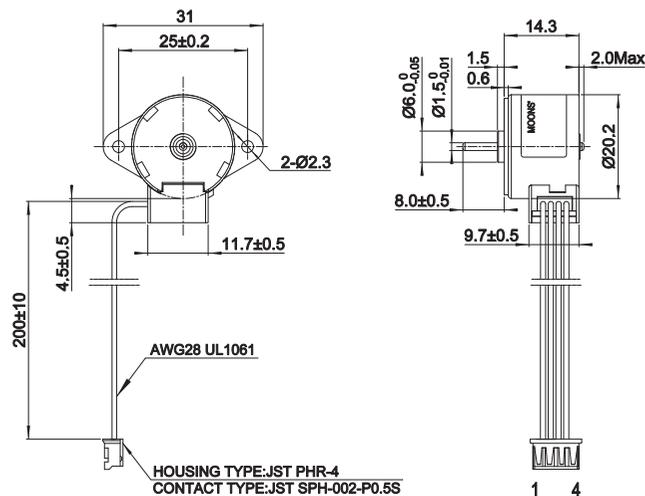

20PM020S0-01002

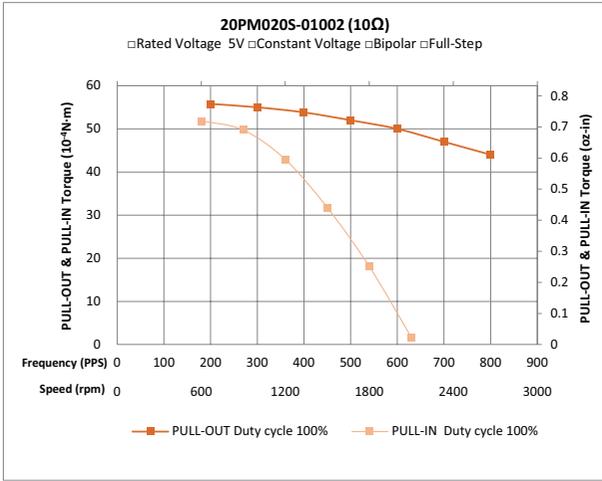

20PM020S0-02501

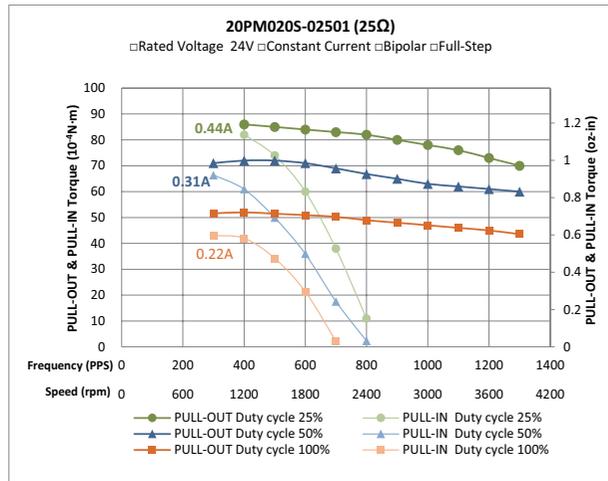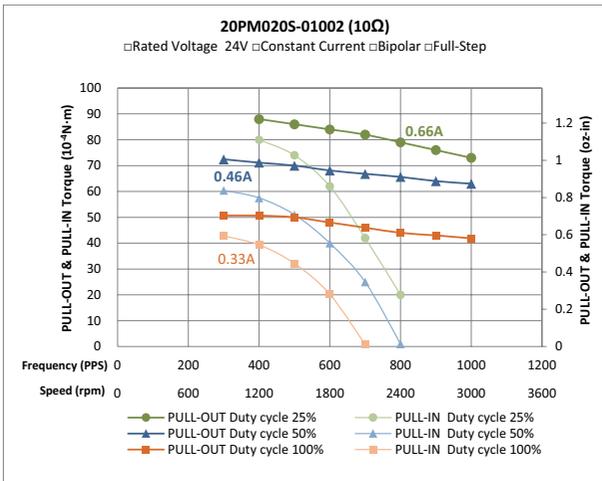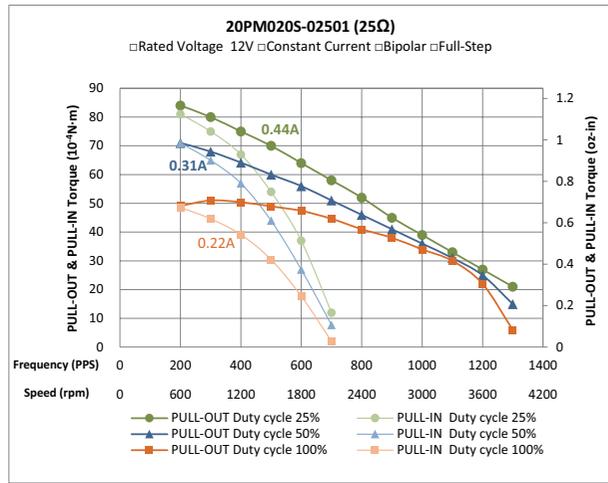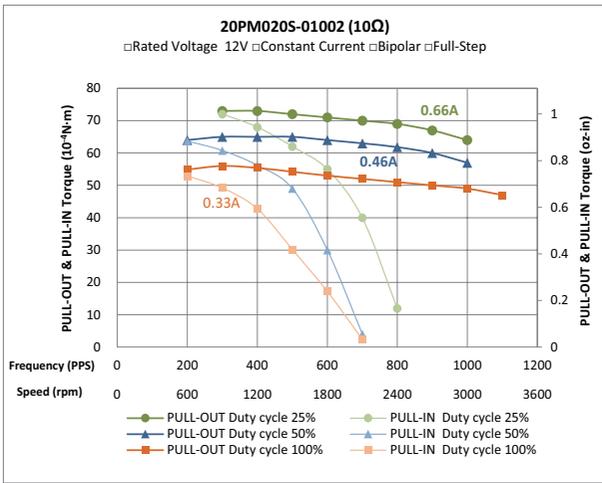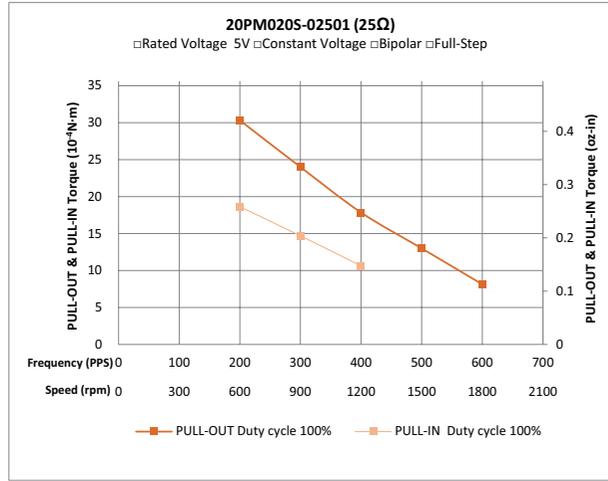

20PM020L - Ø20mm, L, 18°




- Phases 2
- Steps / Revolution 20(18°)
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			20PM020L8-00702	20PM020L8-02101
Length			19.3mm (0.76in.)	
Step Angle	°		18	
Rated Current	Amps		0.43	0.25
Holding Torque	10 ⁻⁴ Nm	Typ.	120	120
	oz-in	Typ.	1.67	1.67
Coil Resistance	Ohms	±10% @ 20°C	7	21.5
Coil Inductance	mH	Typ.	5.6	16.5
Detent Torque	10 ⁻⁴ Nm	Max.	25	25
	oz-in	Max.	0.35	0.35
Rotor Inertia	gcm ²		0.41	0.41
	10 ⁻⁴ oz-in ²		22.4	22.4
Motor Weight	g		27	
	Lbs		0.060	

^ Preferred model





Dimensions: mm

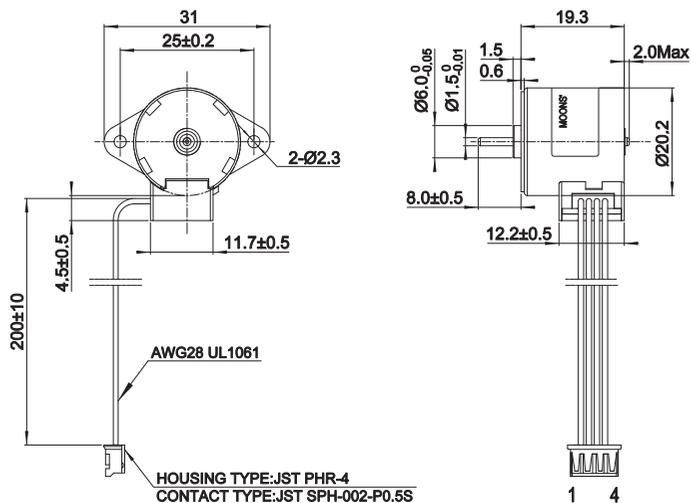

20PM020L8-00702



20PM020L8-02101

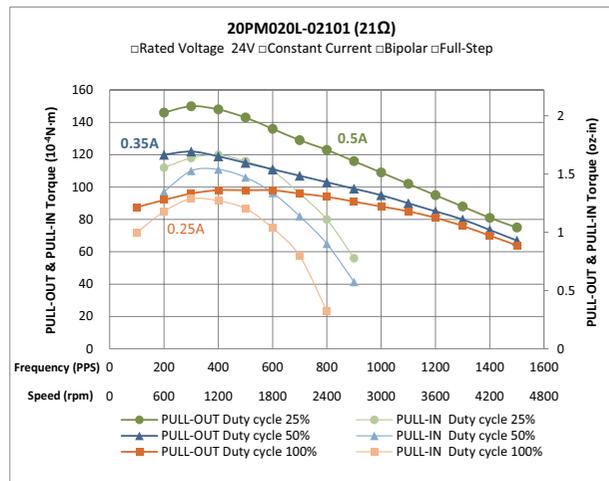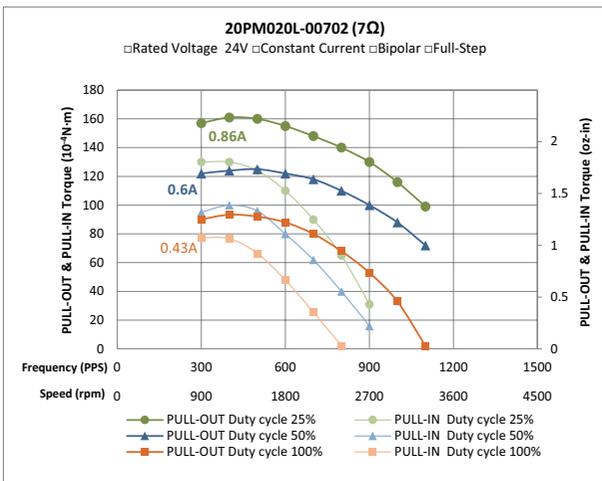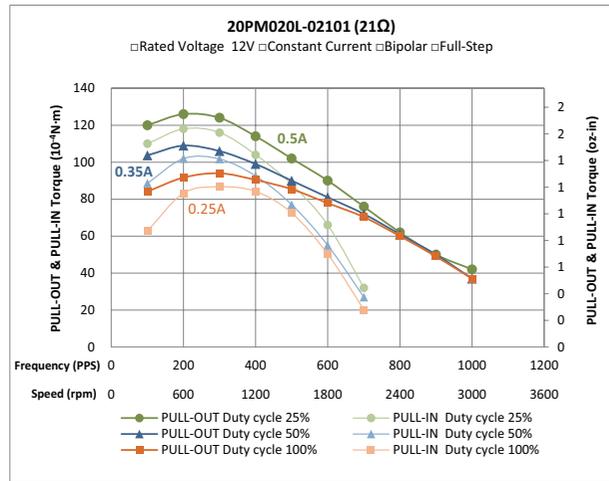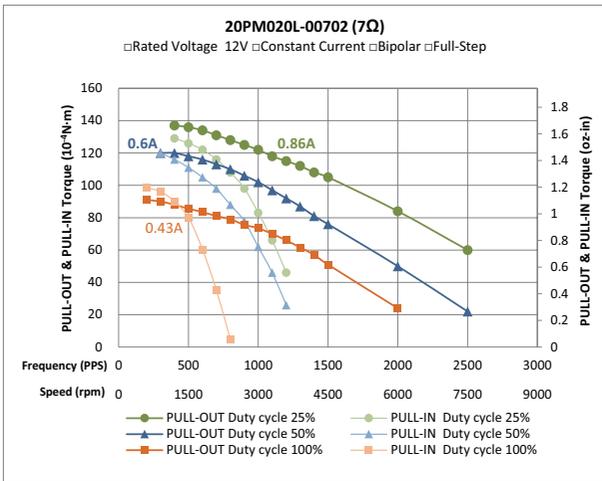

25PM024S - Ø25mm, S, 15°




- Phases 2
- Steps / Revolution 15°
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data


Model Number			25PM024S8-00601	25PM024S8-01601
Length			12.5mm (0.49in.)	
Step Angle	°		15	
Rated Current	Amps		0.5	0.32
Holding Torque	10 ⁻⁴ Nm	Typ.	100	110
	oz-in	Typ.	1.39	1.53
Coil Resistance	Ohms	±10% @ 20°C	6	16
Coil Inductance	mH	Typ.	3	8.6
Detent Torque	10 ⁻⁴ Nm	Max.	25	25
	oz-in	Max.	0.35	0.35
Rotor Inertia	gcm ²		0.56	0.56
	10 ⁻⁴ oz-in ²		30.6	30.6
Motor Weight	g		30	
	Lbs		0.066	

^ Preferred model






Dimensions: mm

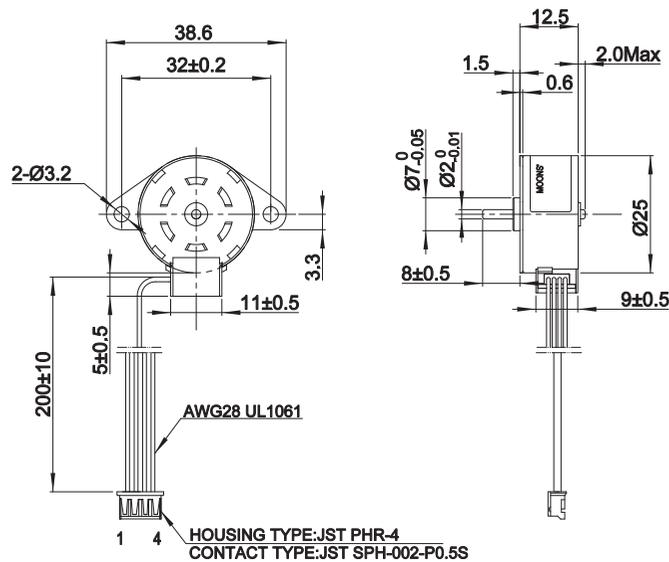

25PM024S8-00601

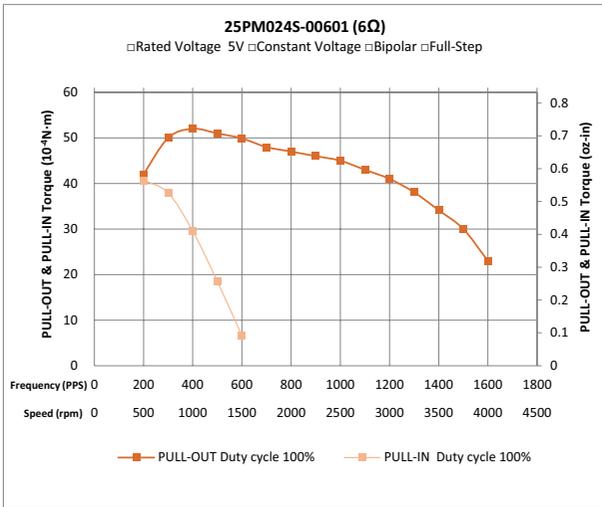

25PM024S8-01601

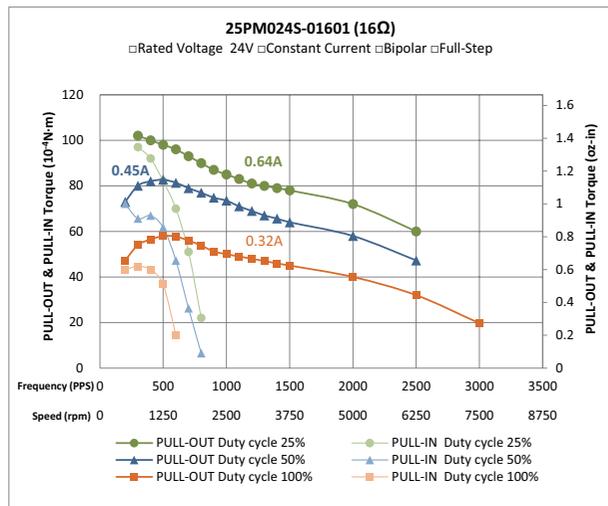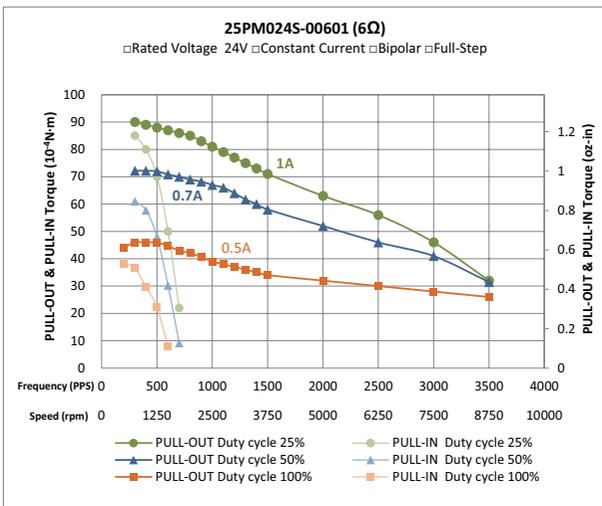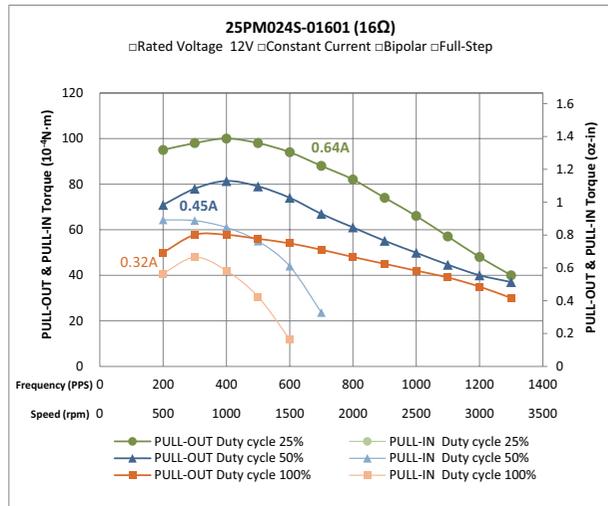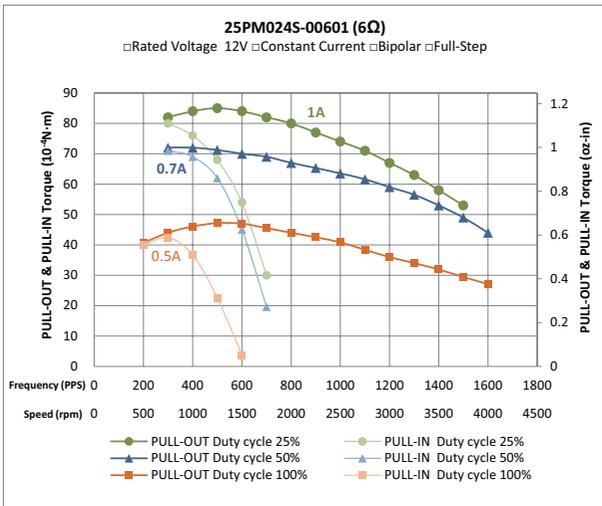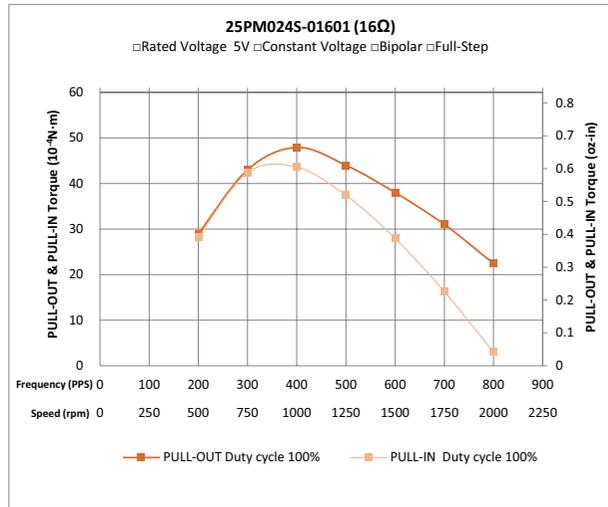

25PM048S - Ø25mm, S, 7.5°




- Phases 2
- Steps / Revolution 7.5°
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			25PM048S9-00601	25PM048S9-01601
Length			12.5mm (0.49in.)	
Step Angle	°		7.5	
Rated Current	Amps		0.5	0.32
Holding Torque	10 ⁻⁴ Nm	Typ.	160	160
	oz-in	Typ.	2.22	2.22
Coil Resistance	Ohms	±10% @ 20°C	6	16
Coil Inductance	mH	Typ.	2.7	8
Detent Torque	10 ⁻⁴ Nm	Max.	25	25
	oz-in	Max.	0.35	0.35
Rotor Inertia	gcm ²		0.56	0.56
	10 ⁻⁴ oz-in ²		30.6	30.6
Motor Weight	g		30	
	Lbs		0.066	







^ Preferred model

Dimensions: mm

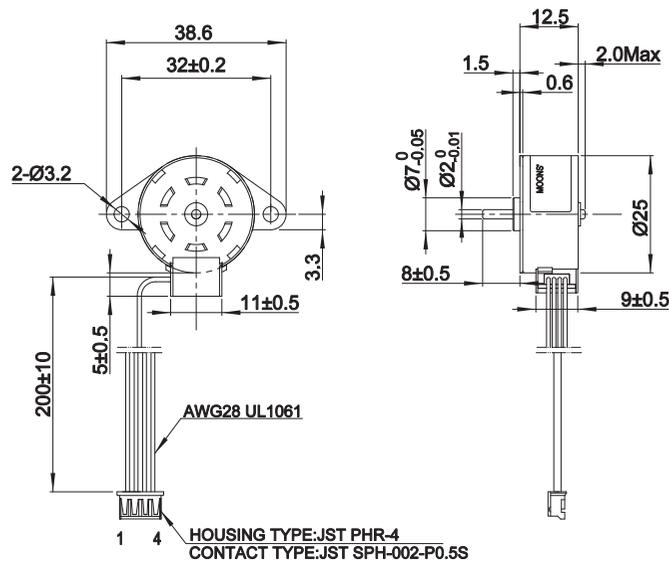

25PM048S9-00601

25PM048S9-01601

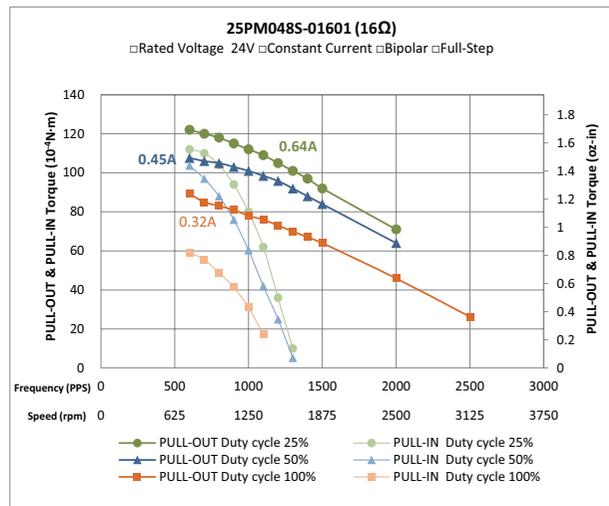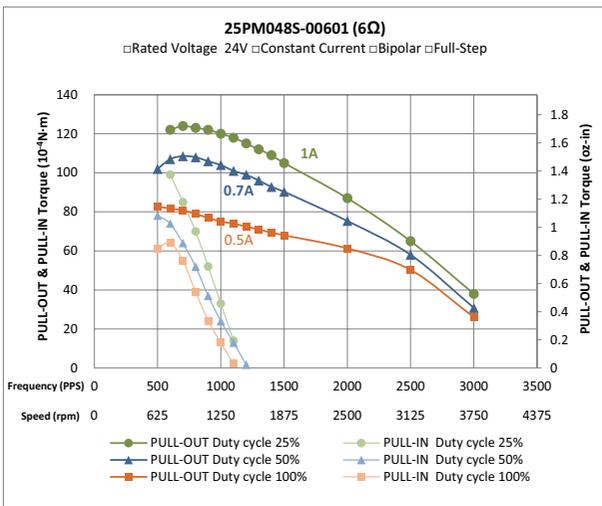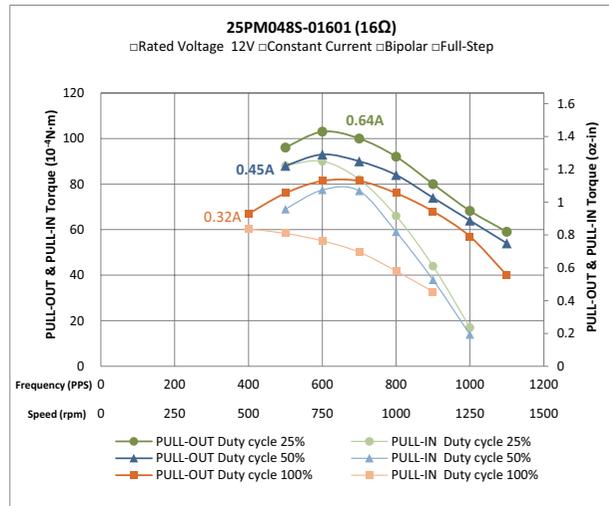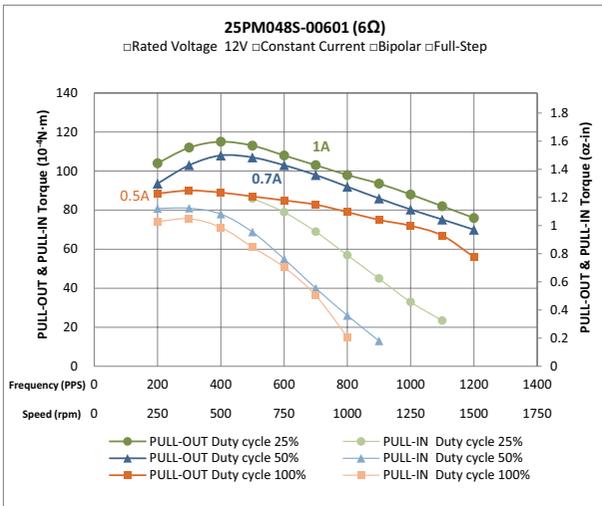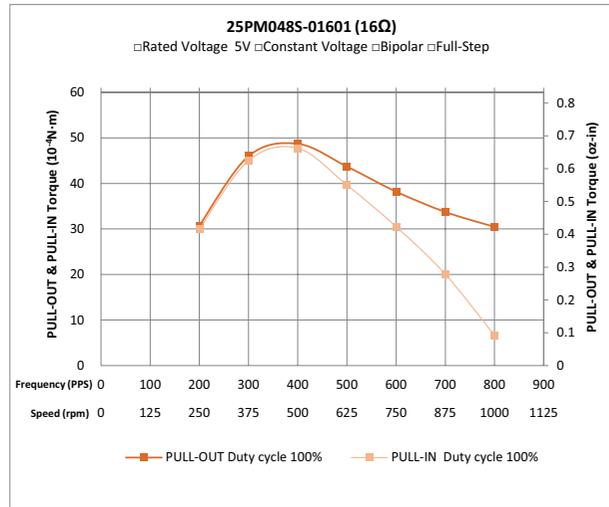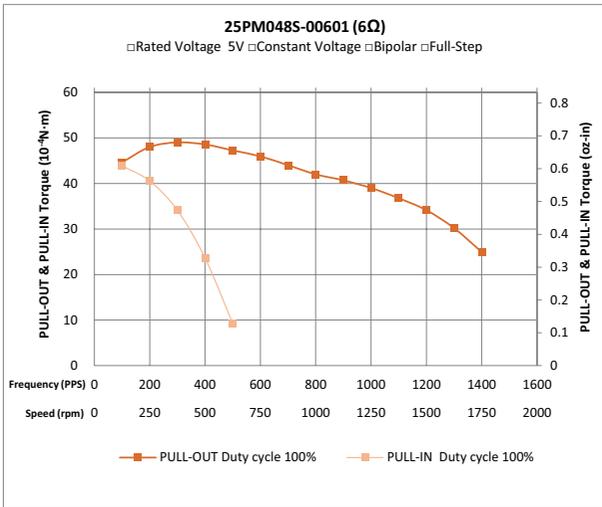

25PM024L - Ø25mm, L, 15°




- Phases 2
- Steps / Revolution 15°
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			25PM024L6-00801	25PM024L6-01401
Length			17mm (0.67in.)	
Step Angle	°		15	
Rated Current	Amps		0.47	0.35
Holding Torque	10 ⁻⁴ Nm	Typ.	170	180
	oz-in	Typ.	2.36	2.50
Coil Resistance	Ohms	±10% @ 20°C	8	14
Coil Inductance	mH	Typ.	6	11.5
Detent Torque	10 ⁻⁴ Nm	Max.	25	25
	oz-in	Max.	0.35	0.35
Rotor Inertia	gcm ²		0.85	0.85
	10 ⁻⁴ oz-in ²		46.5	46.5
Motor Weight	g		39	
	Lbs		0.086	







^ Preferred model

Dimensions: mm

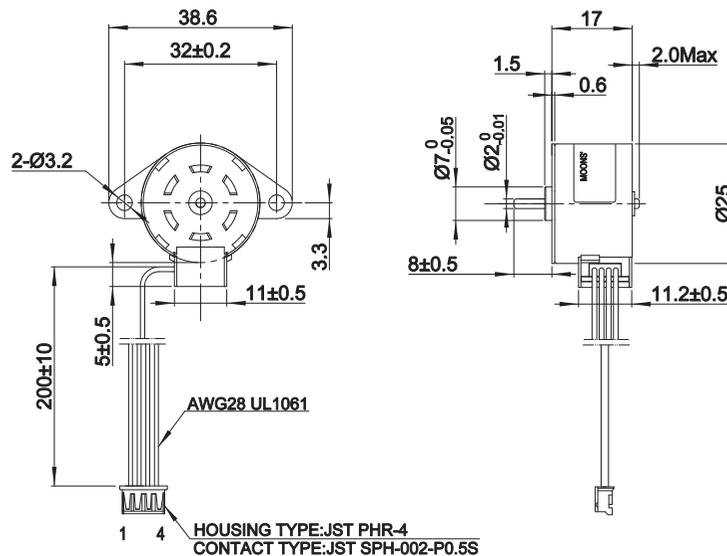

25PM024L6-00801

25PM024L6-01401

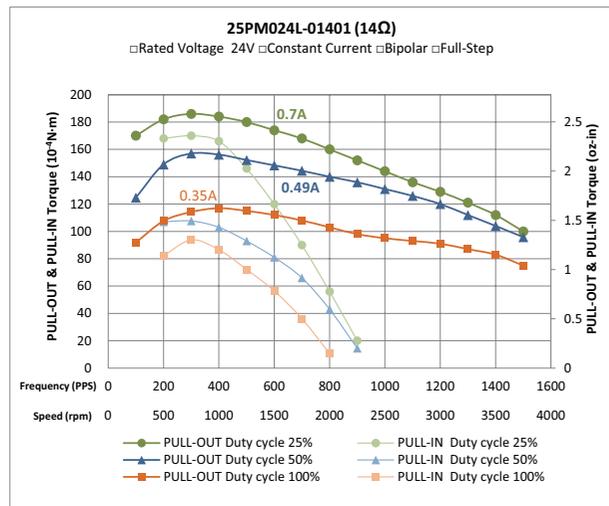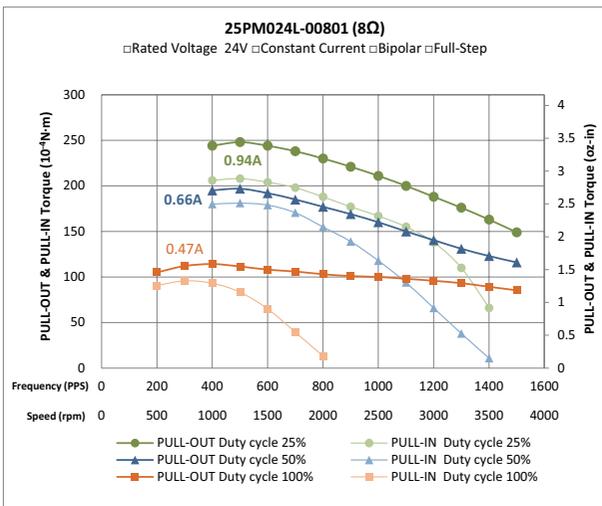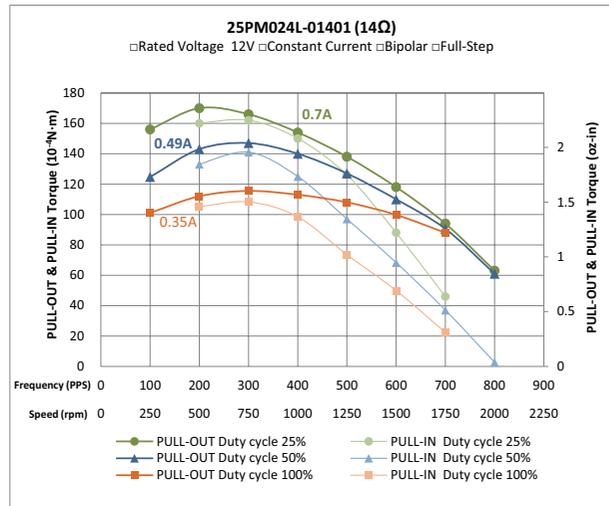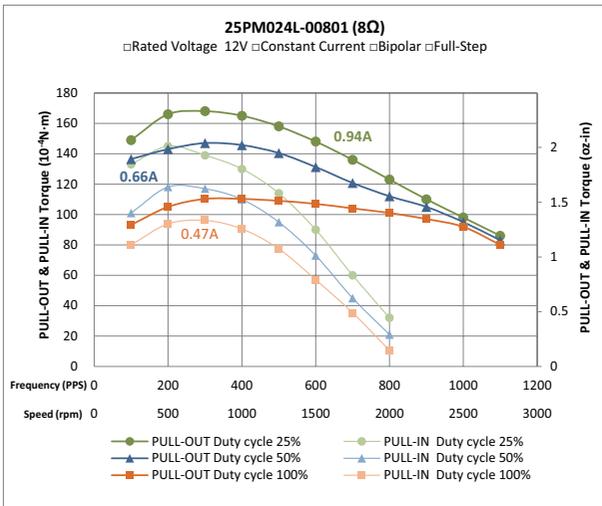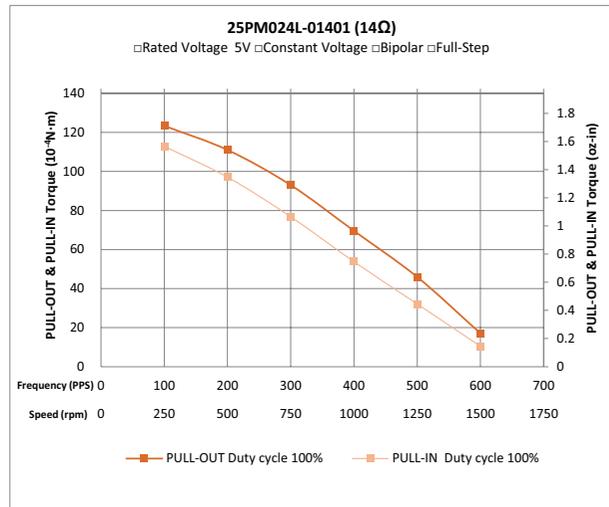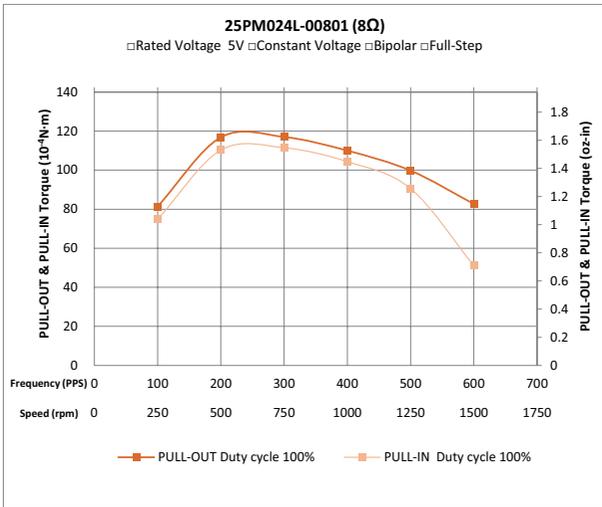

25PM048L - Ø25mm, L, 7.5°




- Phases 2
- Steps / Revolution 7.5°
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			25PM048L6-00801	25PM048L6-01401
Length			17mm (0.67in.)	
Step Angle	°		7.5	
Rated Current	Amps		0.47	0.35
Holding Torque	10 ⁻⁴ Nm	Typ.	250	270
	oz-in	Typ.	3.47	3.75
Coil Resistance	Ohms	±10% @ 20°C	8	14
Coil Inductance	mH	Typ.	7.5	13
Detent Torque	10 ⁻⁴ Nm	Max.	45	45
	oz-in	Max.	0.63	0.63
Rotor Inertia	gcm ²		0.85	0.85
	10 ⁻⁴ oz-in ²		46.5	46.5
Motor Weight	g		39	
	Lbs		0.086	

^ Preferred model

Dimensions: mm

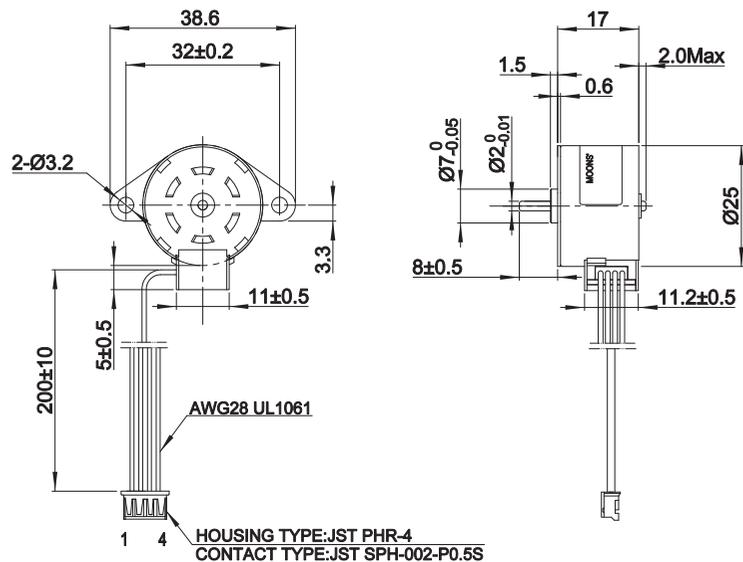

Product Overview

Rotary Motors

Linear Actuators





Gearmotors

Technical


25PM048L6-00801



25PM048L6-01401

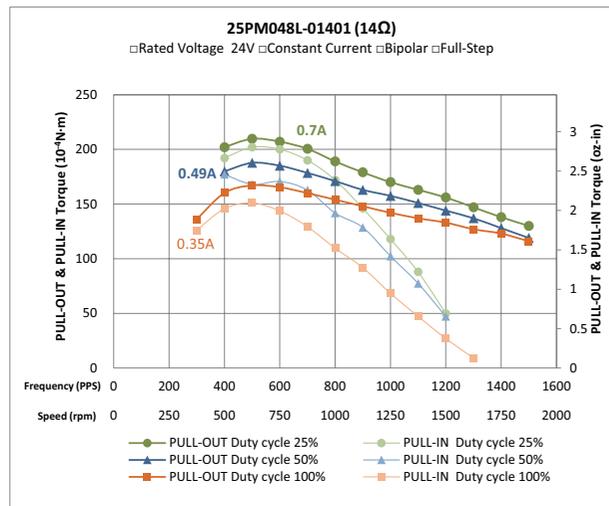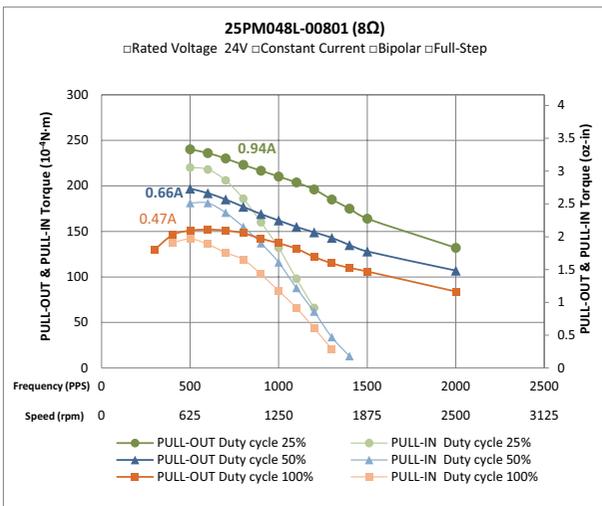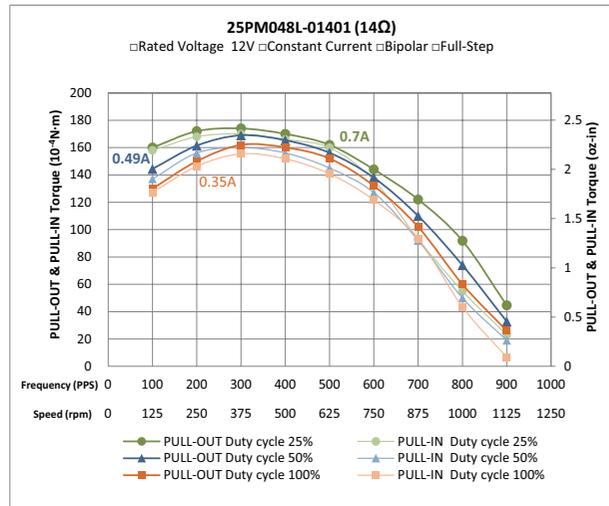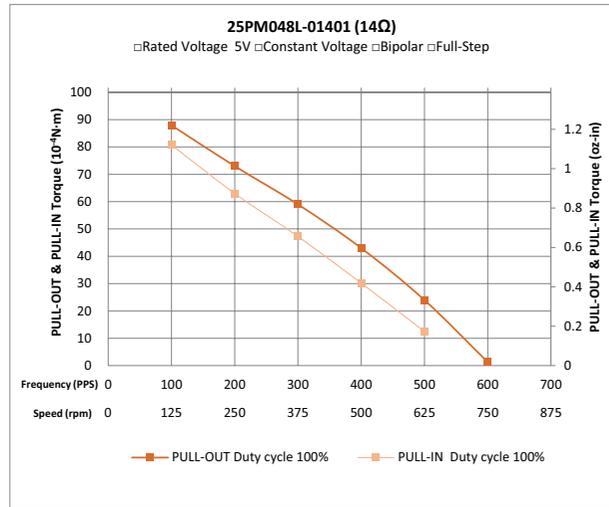

28PN024L - Ø28mm, L, 15°




- Phases 2
- Steps / Revolution 15°
- Shaft Load
 - Axial 1N
 - Radial 5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -15°C to +60°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data


Model Number			28PN024L8-00802	28PN024L6-02402
Length			21.6mm (0.85in.)	
Step Angle	°		15	
Rated Current	Amps		0.5	0.16
Holding Torque	10 ⁻⁴ Nm	Typ.	330	160
	oz-in	Typ.	4.58	2.22
Coil Resistance	Ohms	±10% @ 20°C	8.5	24
Coil Inductance	mH	Typ.	7	18.4
Detent Torque	10 ⁻⁴ Nm	Max.	65	50
	oz-in	Max.	0.90	0.69
Rotor Inertia	gcm ²		3.9	3.9
	10 ⁻⁴ oz-in ²		213.3	213.3
Motor Weight	g		60	
	Lbs		0.132	

^ Preferred model


Dimensions: mm

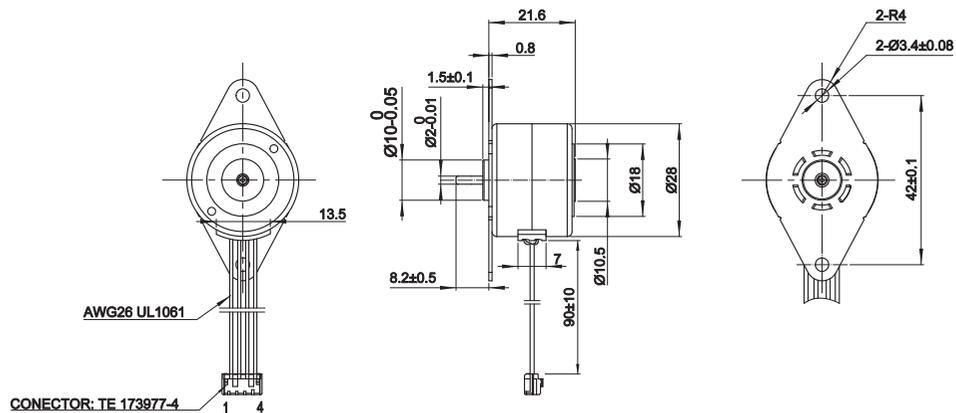

28PN024L-00802

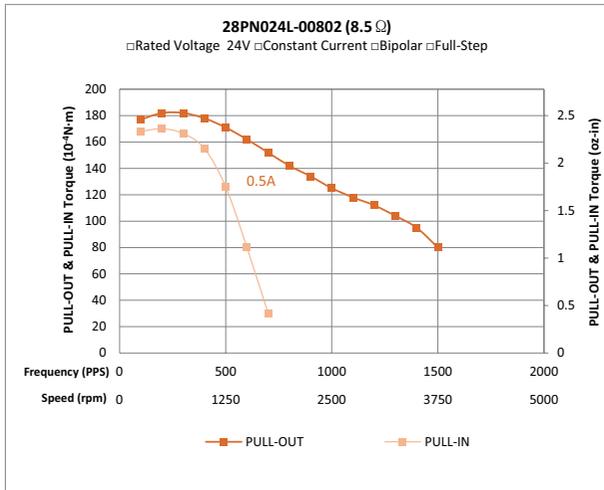

28PN024L-02402

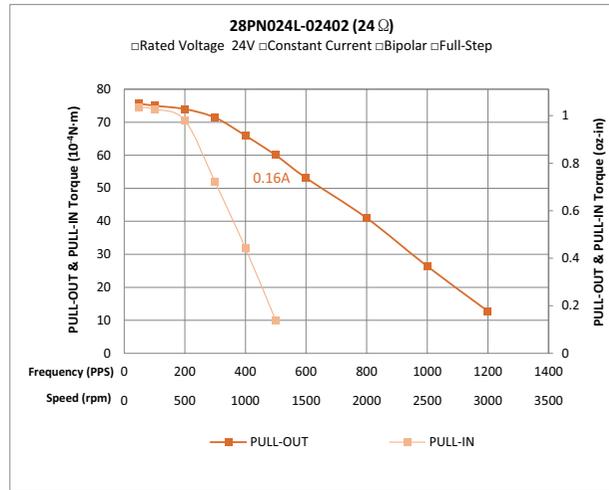

35PM024S - Ø35mm, S, 15°




- Phases 2
- Steps / Revolution 15°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data




Model Number			35PM024S8-00502	35PM024S8-01201	35PM024S8-08001
Length			15.3mm (0.60in.)		
Step Angle	°		15		
Rated Current	Amps		0.6	0.38	0.15
Holding Torque	10 ⁻⁴ Nm	Typ.	220	220	220
	oz-in	Typ.	3.06	3.06	3.06
Coil Resistance	Ohms	±10% @ 20°C	5	12	80
Coil Inductance	mH	Typ.	4	10	73
Detent Torque	10 ⁻⁴ Nm	Max.	60	60	60
	oz-in	Max.	0.83	0.83	0.83
Rotor Inertia	gcm ²		2.9	2.9	2.9
	10 ⁻⁴ oz-in ²		153	153	153
Motor Weight	g		70		
	Lbs		0.15		

^ Preferred model




Dimensions: mm

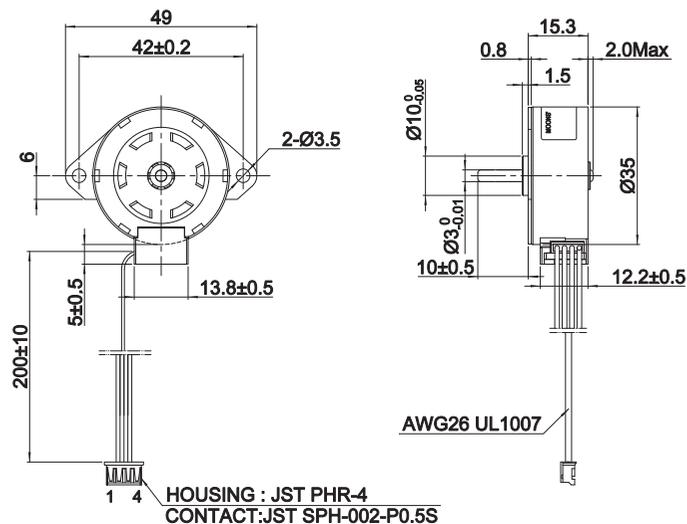




35PM024S8-00502

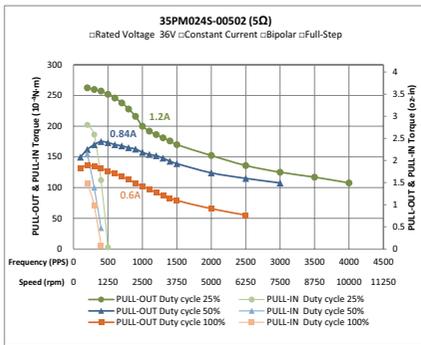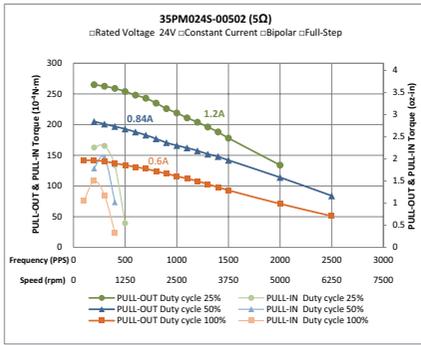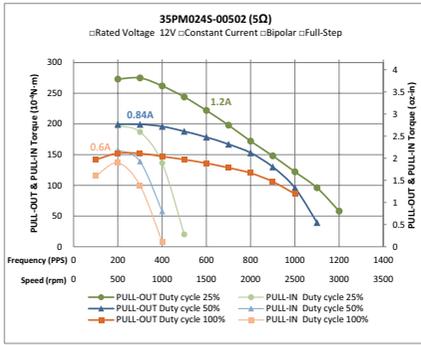

35PM024S8-01201

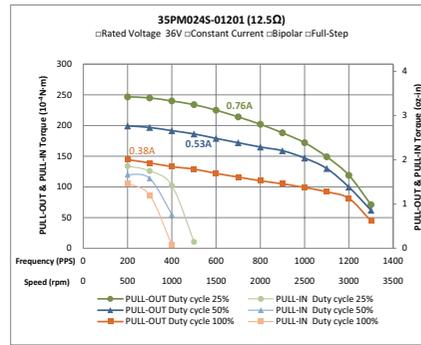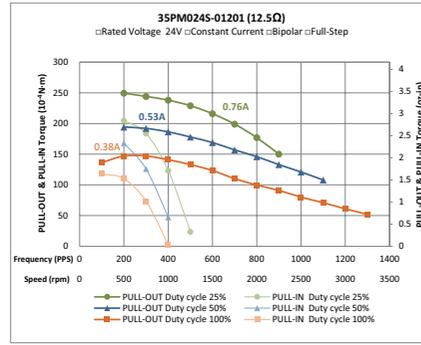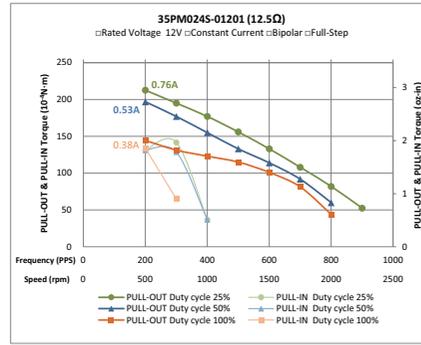

35PM024S8-08001

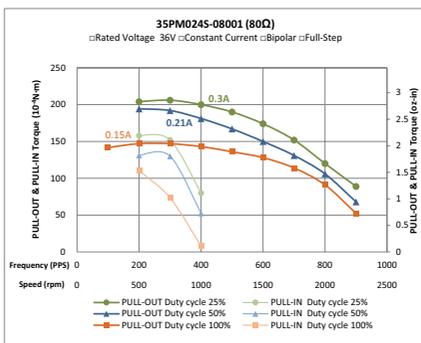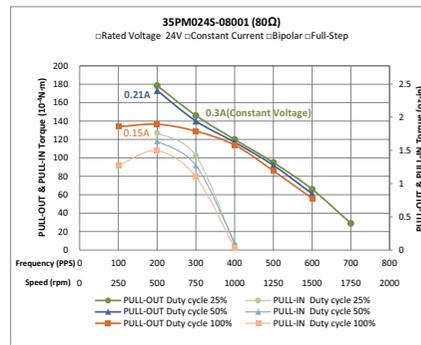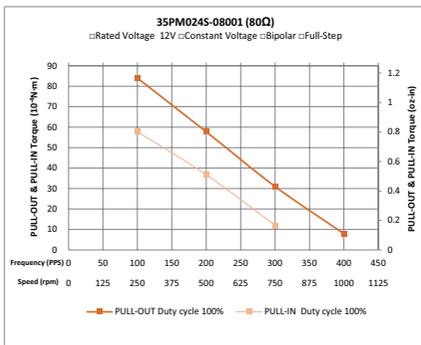

35PM048S - Ø35mm, S, 7.5°




- Phases 2
- Steps / Revolution 7.5°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data




Model Number			35PM048S0-00508	35PM048S0-01203	35PM048S0-08001
Length			15.3mm (0.60in.)		
Step Angle	°		7.5		
Rated Current	Amps		0.6	0.38	0.15
Holding Torque	10 ⁻⁴ Nm	Typ.	480	460	460
	oz-in	Typ.	6.67	6.39	6.39
Coil Resistance	Ohms	±10% @ 20°C	5	12	80
Coil Inductance	mH	Typ.	5.4	11.9	74
Detent Torque	10 ⁻⁴ Nm	Max.	75	75	75
	oz-in	Max.	1.04	1.04	1.04
Rotor Inertia	gcm ²		2.9	2.9	2.9
	10 ⁻⁴ oz-in ²		153	153	153
Motor Weight	g		70		
	Lbs		0.15		

^ Preferred model




Dimensions: mm

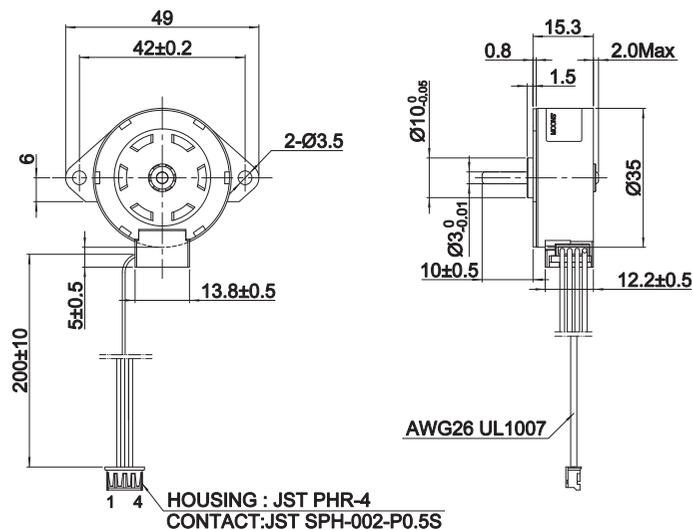




35PM048S0-00501

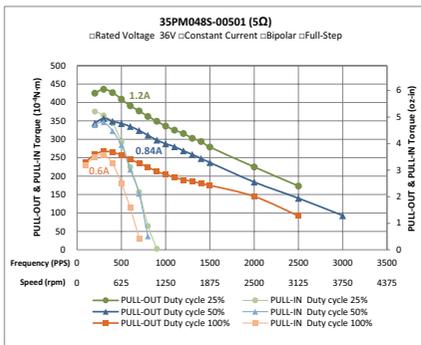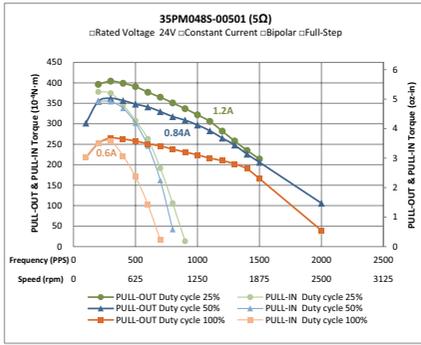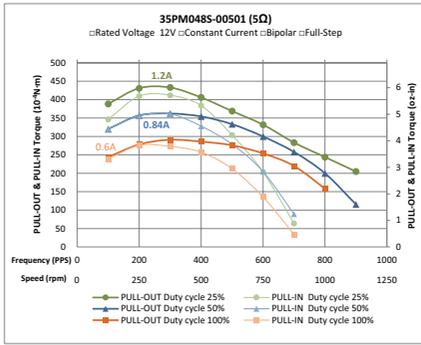

35PM048S0-01201

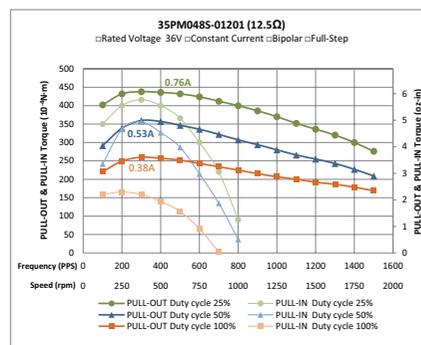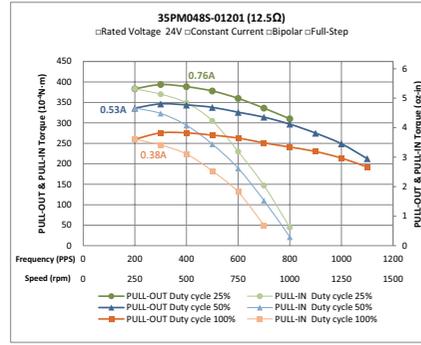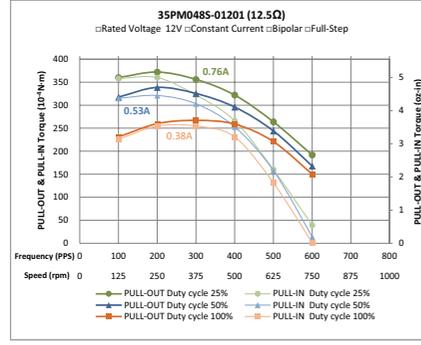

35PM048S8-01201

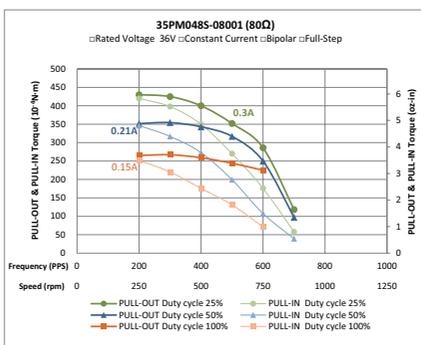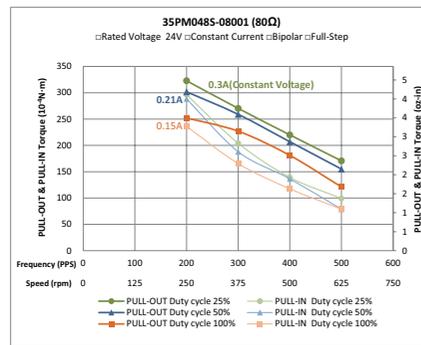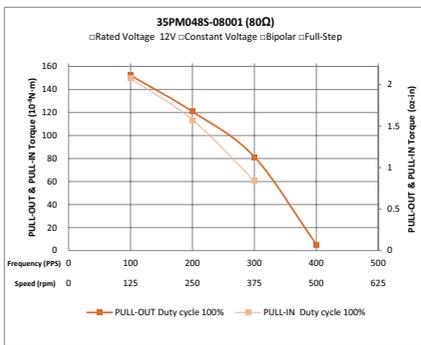

35PM024L - Ø35mm, L, 15°




- Phases 2
- Steps / Revolution 15°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data




Model Number			35PM024L8-00502	35PM024L8-01202	35PM024L8-07501
Length			21.3 mm (0.84 in.)		
Step Angle	°		15		
Rated Current	Amps		0.63	0.4	0.16
Holding Torque	10 ⁻⁴ Nm	Typ.	420	420	360
	oz-in	Typ.	5.83	5.83	5.00
Coil Resistance	Ohms	±10% @ 20°C	5.3	12.5	75
Coil Inductance	mH	Typ.	7.7	18.2	87
Detent Torque	10 ⁻⁴ Nm	Max.	75	75	75
	oz-in	Max.	1.04	1.04	1.04
Rotor Inertia	gcm ²		4.65	4.65	4.65
	10 ⁻⁴ oz-in ²		257	257	257
Motor Weight	g		90		
	Lbs		0.2		

^ Preferred model




Dimensions: mm

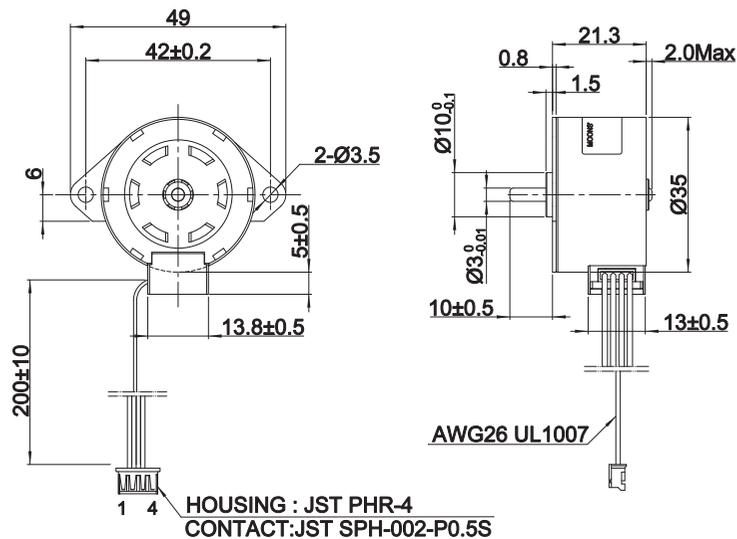




35PM024L8-00502

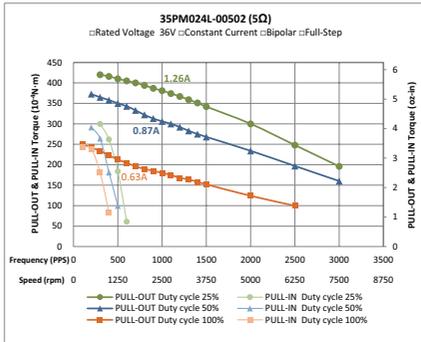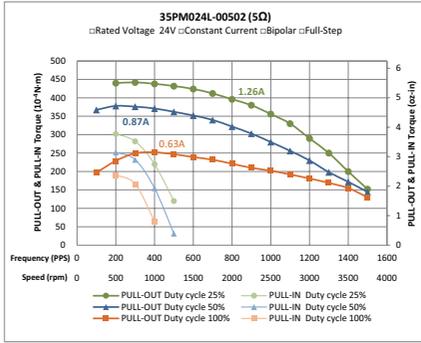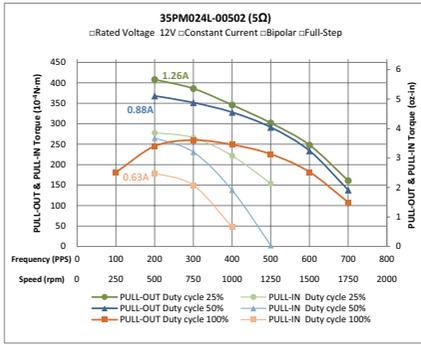

35PM024L8-01202

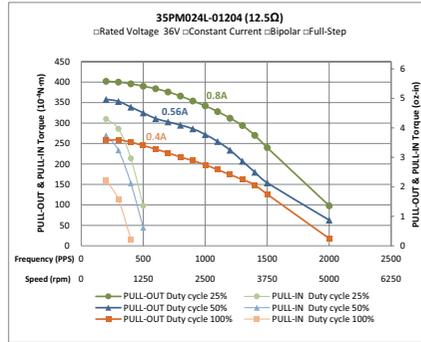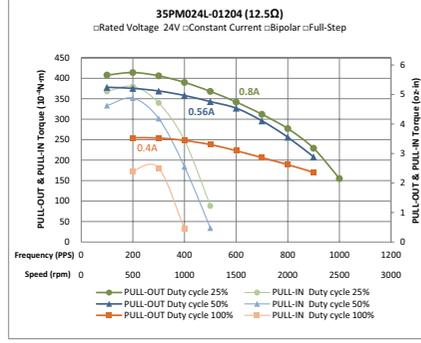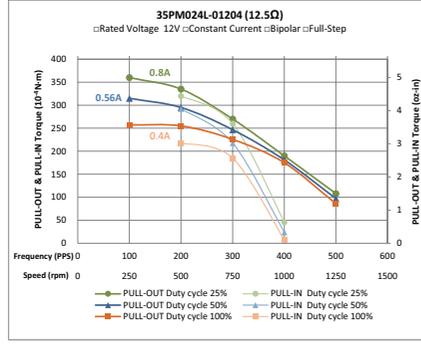

35PM024L8-07501

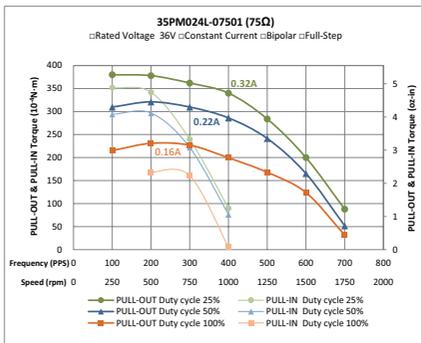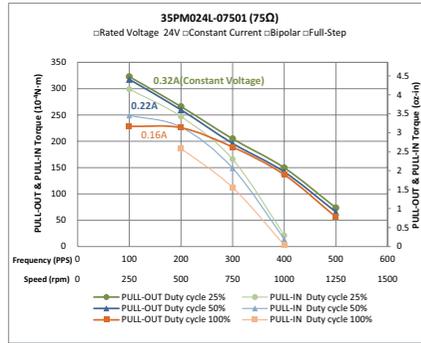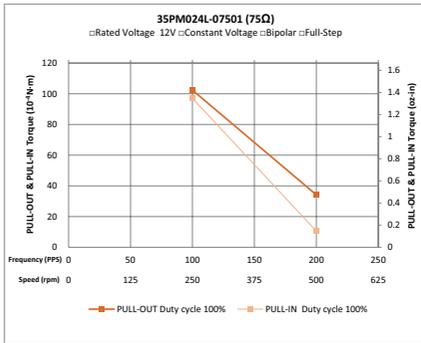

35PM048L - Ø35mm, L, 7.5°




- Phases 2
- Steps / Revolution 7.5°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data




Model Number			35PM048L6-00501	35PM048L6-01201	35PM048L6-07501
Length			21.3 mm (0.84 in.)		
Step Angle	°		7.5		
Rated Current	Amps		0.63	0.4	0.16
Holding Torque	10 ⁻⁴ Nm	Typ.	620	620	620
	oz-in	Typ.	8.61	8.61	8.61
Coil Resistance	Ohms	±10% @ 20°C	5	12.5	75
Coil Inductance	mH	Typ.	8.6	21.3	102
Detent Torque	10 ⁻⁴ Nm	Max.	95	95	95
	oz-in	Max.	1.32	1.32	1.32
Rotor Inertia	gcm ²		4.65	4.65	4.65
	10 ⁻⁴ oz-in ²		257	257	257
Motor Weight	g		90		
	Lbs		0.2		

^ Preferred model




Dimensions: mm

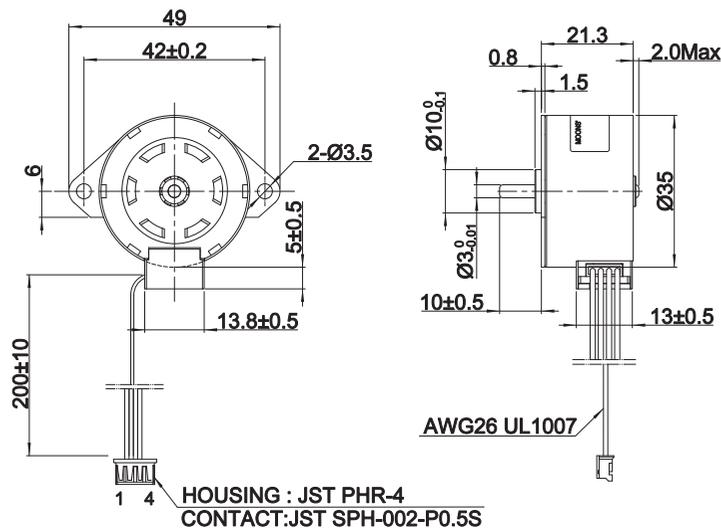




35PM048L6-00501

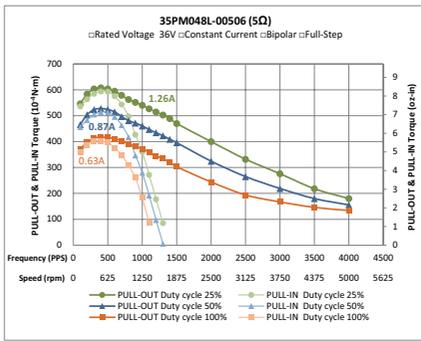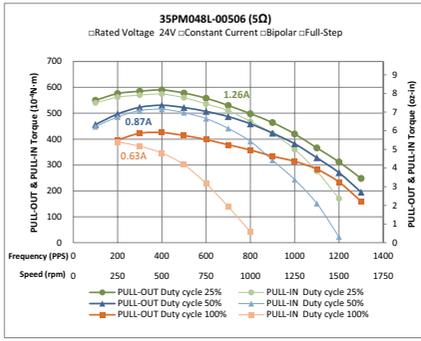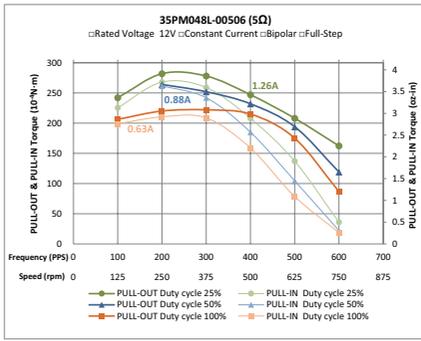

35PM048L6-01201

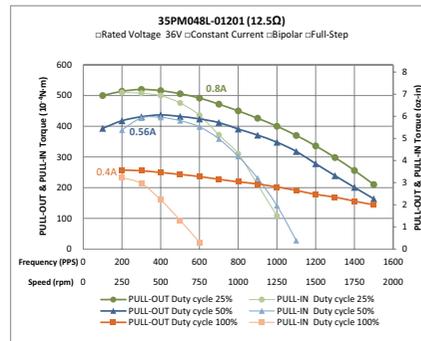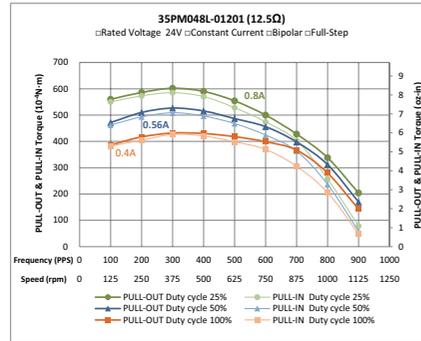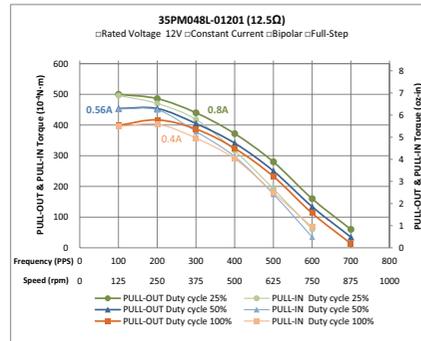

35PM048L6-07501

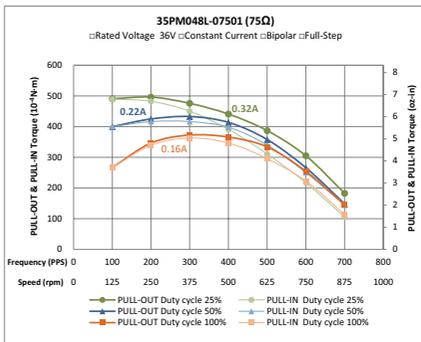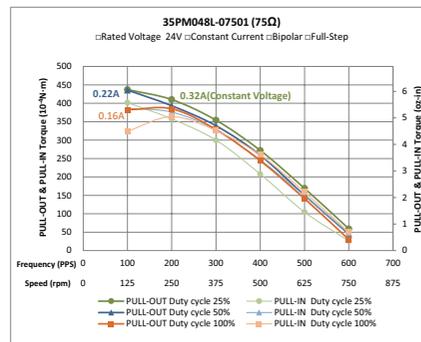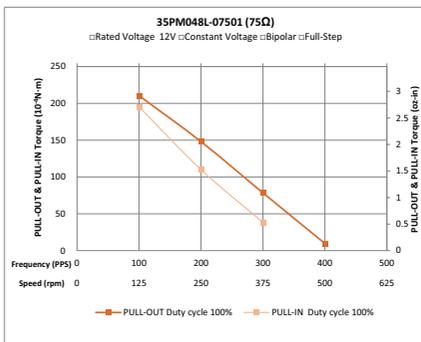

42PM048S - Ø42mm, S, 7.5°




- Phases 2
- Steps / Revolution 7.5°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			42PM048S8-00501	42PM048S8-01209	42PM048S8-08001
Length			15.3mm (0.60in.)		
Step Angle	°		7.5		
Rated Current	Amps		0.65	0.42	0.15
Holding Torque	10 ⁻⁴ Nm	Typ.	740	640	640
	oz-in	Typ.	10.28	8.89	8.89
Coil Resistance	Ohms	±10% @ 20°C	5.4	11.5	80
Coil Inductance	mH	Typ.	6	12	79
Detent Torque	10 ⁻⁴ Nm	Max.	85	85	85
	oz-in	Max.	1.18	1.18	1.18
Rotor Inertia	gcm ²		7.26	7.26	7.26
	10 ⁻⁴ oz-in ²		404	404	404
Motor Weight	g		90		
	Lbs		0.2		

^ Preferred model

Dimensions: mm

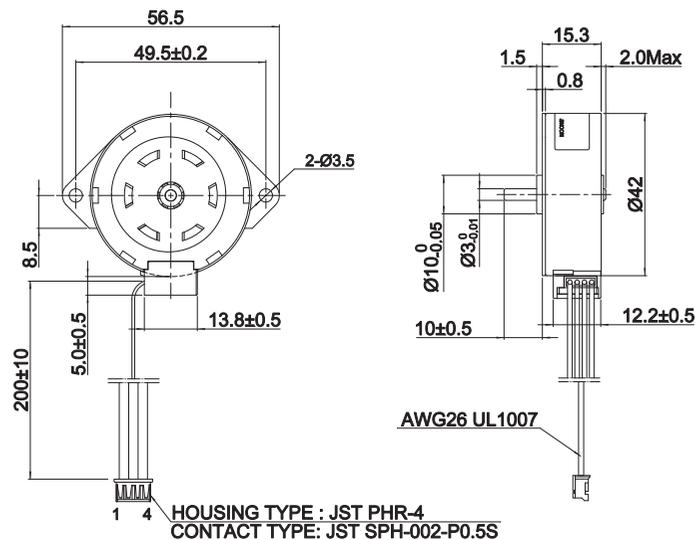

Product Overview




Rotary Motors

Linear Actuators



Gearmotors

Technical




42PM048S8-00501

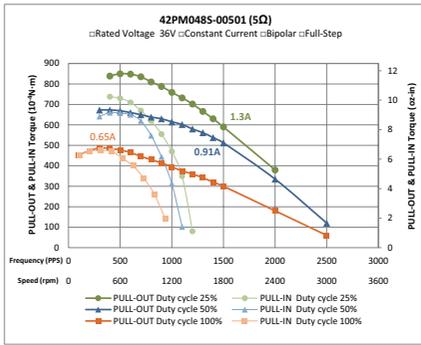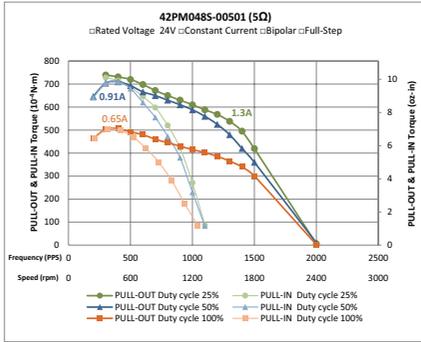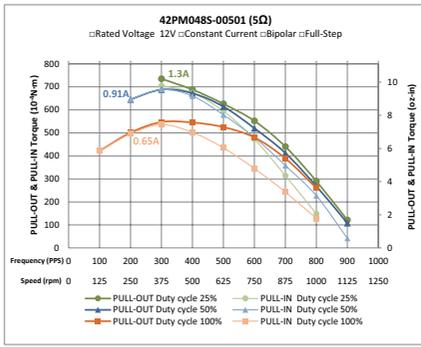

42PM048S8-01209

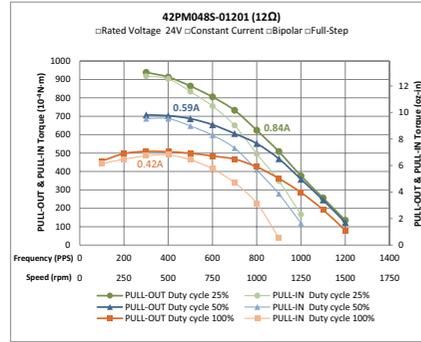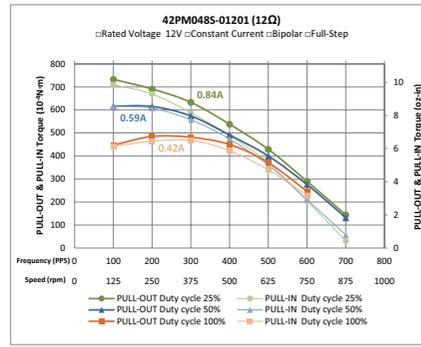

42PM048S8-08001

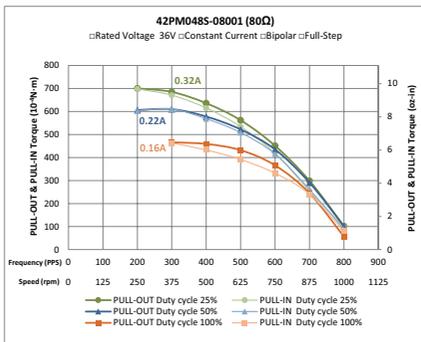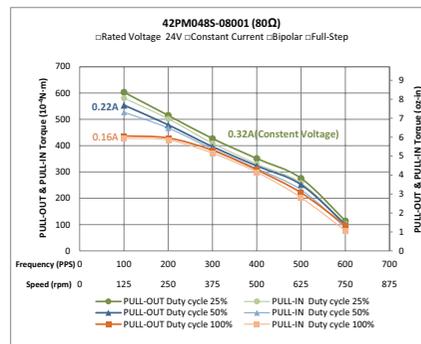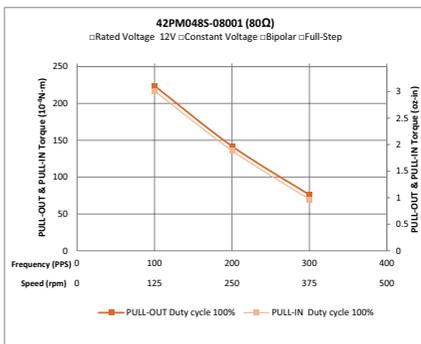

42PM096S - Ø42mm, S, 3.75°




- Phases 2
- Steps / Revolution 3.75°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			42PM096S4-00501	42PM096S4-01201	42PM096S4-08001
Length			15.3mm (0.60in.)		
Step Angle	°		3.75		
Rated Current	Amps		0.65	0.42	0.15
Holding Torque	10 ⁻⁴ Nm	Typ.	540	540	540
	oz-in	Typ.	7.50	7.50	7.50
Coil Resistance	Ohms	±10% @ 20°C	5.5	11.5	80
Coil Inductance	mH	Typ.	7.1	15.2	91
Detent Torque	10 ⁻⁴ Nm	Max.	65	65	65
	oz-in	Max.	0.90	0.90	0.90
Rotor Inertia	gcm ²		7.26	7.26	7.26
	10 ⁻⁴ oz-in ²		404	404	404
Motor Weight	g		90		
	Lbs		0.2		

^ Preferred model

Dimensions: mm

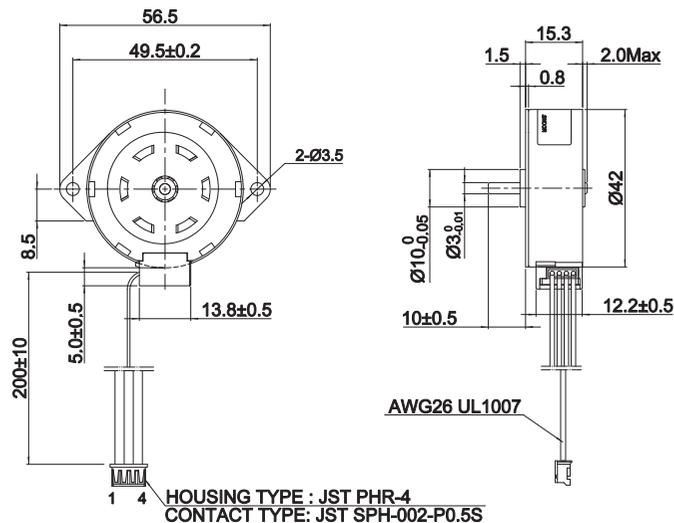

Product Overview




Rotary Motors

Linear Actuators




Gearmotors

Technical




42PM096S4-00501

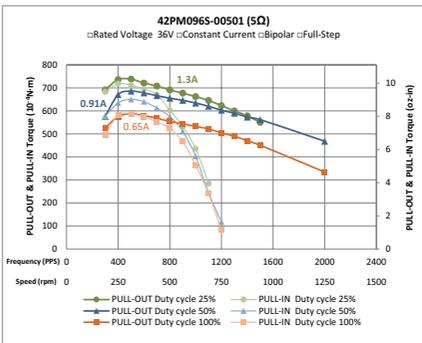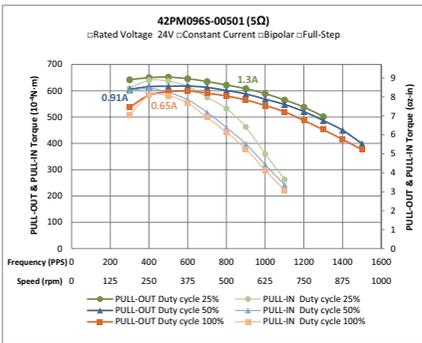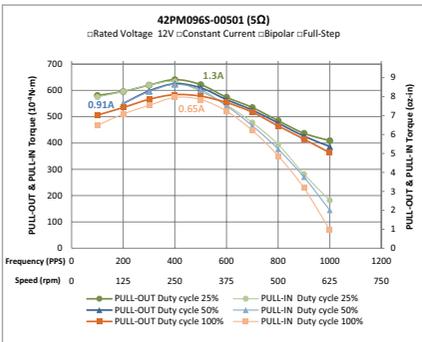

42PM096S4-01201

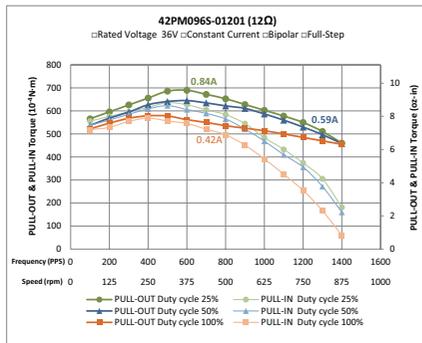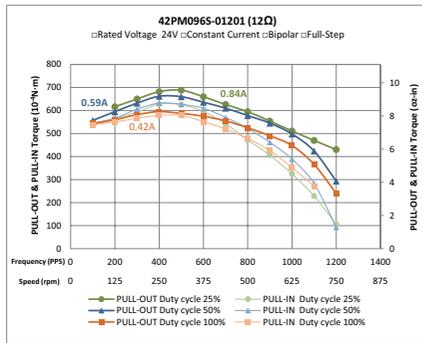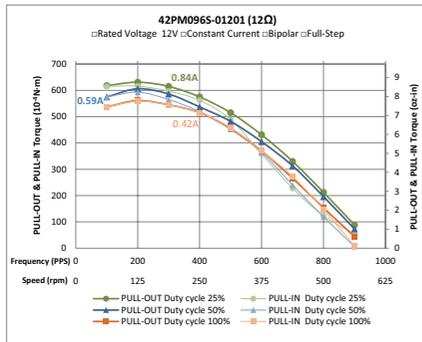

42PM096S4-08001

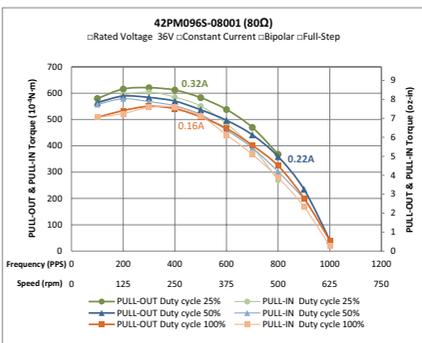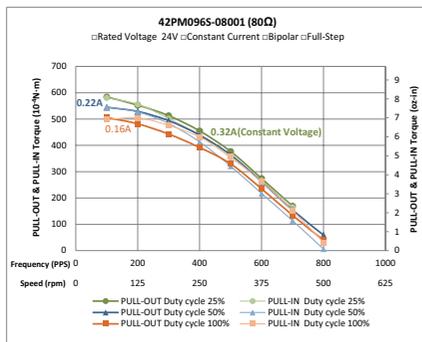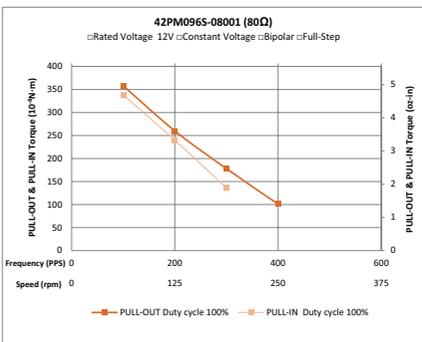

42PM100S - Ø42mm, S, 3.6°




- Phases 2
- Steps / Revolution 3.6°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			42PM100S4-00501	42PM100S4-01201	42PM100S4-08001
Length			15.3mm (0.60in.)		
Step Angle	°		3.6		
Rated Current	Amps		0.65	0.42	0.15
Holding Torque	10 ⁻⁴ Nm	Typ.	540	540	540
	oz-in	Typ.	7.50	7.50	7.50
Coil Resistance	Ohms	±10% @ 20°C	5.5	11.5	80
Coil Inductance	mH	Typ.	6.6	14.3	87
Detent Torque	10 ⁻⁴ Nm	Max.	65	65	65
	oz-in	Max.	0.90	0.90	0.90
Rotor Inertia	gcm ²		7.26	7.26	7.26
	10 ⁻⁴ oz-in ²		404	404	404
Motor Weight	g		90		
	Lbs		0.2		

^ Preferred model

Dimensions: mm

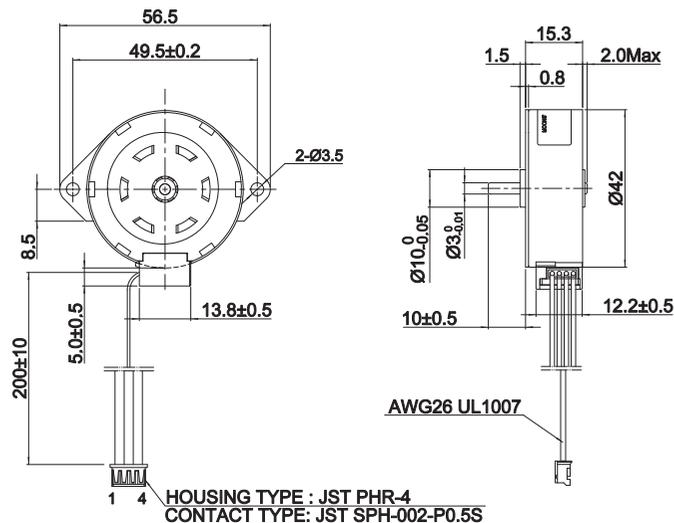

Product Overview




Rotary Motors

Linear Actuators




Gearmotors

Technical




42PM100S4-00501

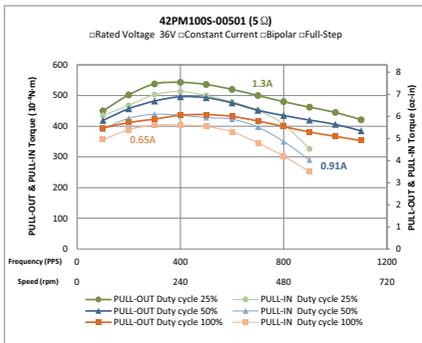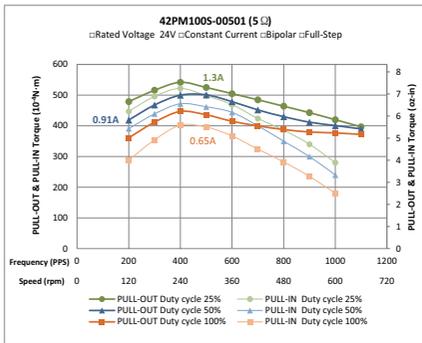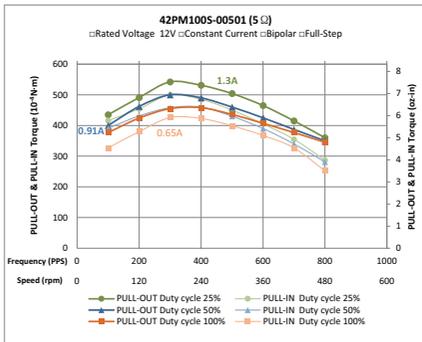

42PM100S4-01201

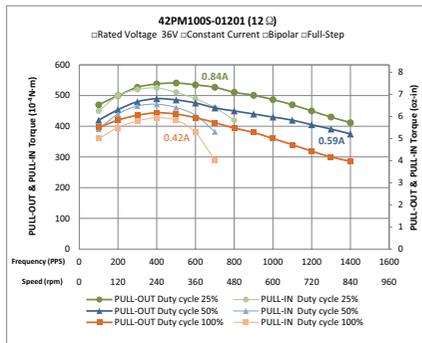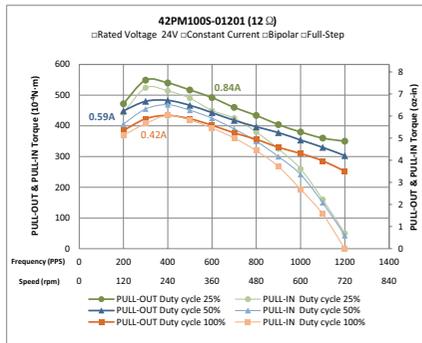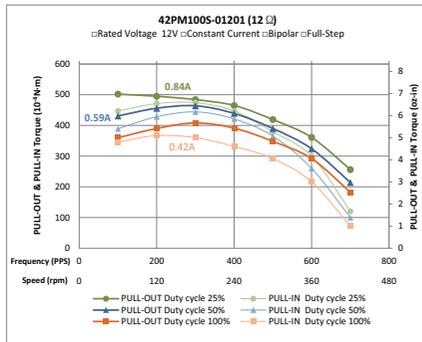

42PM100S4-08001

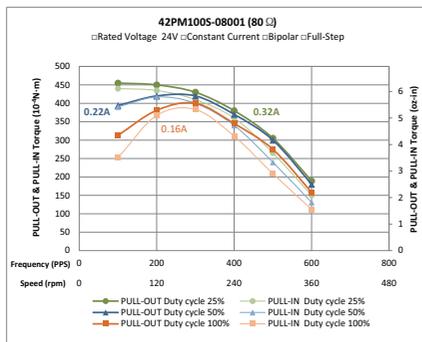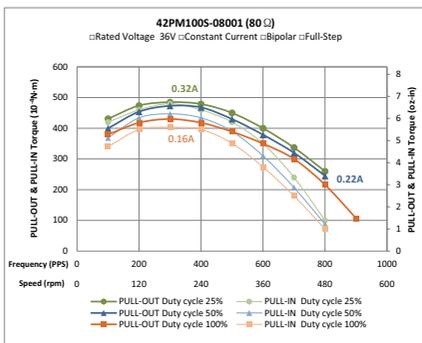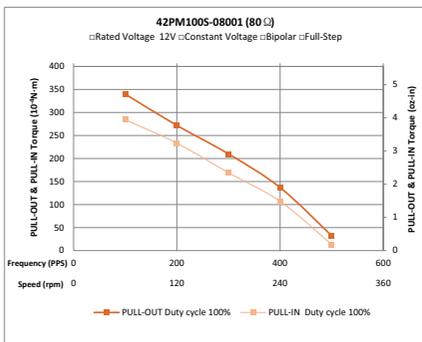

42PM048L - Ø42mm, L, 7.5°




- Phases 2
- Steps / Revolution 7.5°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			42PM048L8-00302	42PM048L8-00703	42PM048L8-06001
Length			21.3 mm (0.84 in.)		
Step Angle	°		7.5		
Rated Current	Amps		0.85	0.55	0.2
Holding Torque	10 ⁻⁴ Nm	Typ.	950	950	1020
	oz-in	Typ.	13.20	13.20	14.17
Coil Resistance	Ohms	±10% @ 20°C	3.2	7	60
Coil Inductance	mH	Typ.	4.7	11.8	90
Detent Torque	10 ⁻⁴ Nm	Max.	140	140	140
	oz-in	Max.	1.94	1.94	1.94
Rotor Inertia	gcm ²		11.57	11.57	11.57
	10 ⁻⁴ oz-in ²		601	601	601
Motor Weight	g		120		
	Lbs		0.26		

^ Preferred model

Dimensions: mm

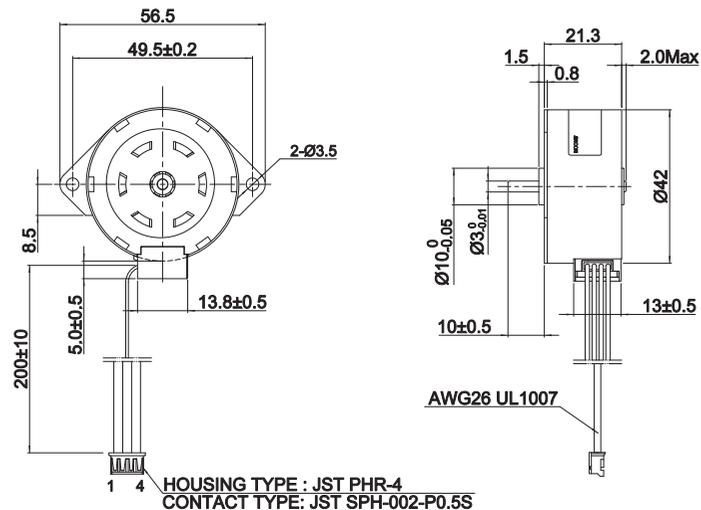

Product Overview




Rotary Motors

Linear Actuators



Gearmotors

Technical




42PM048L1-00302

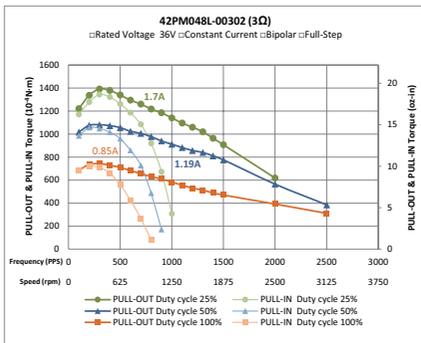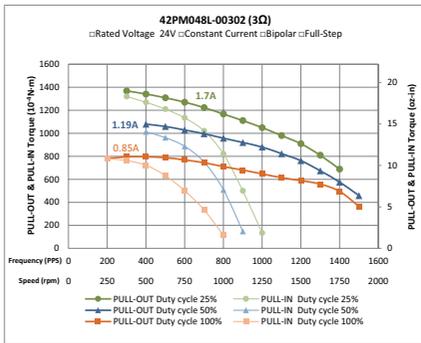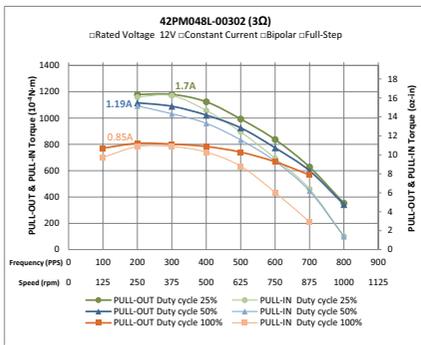

42PM048L1-00711

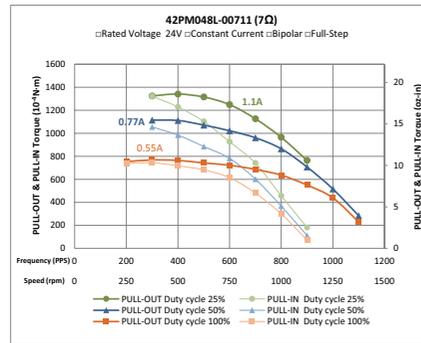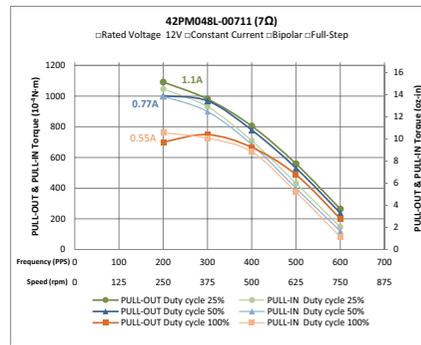

42PM048L1-06001

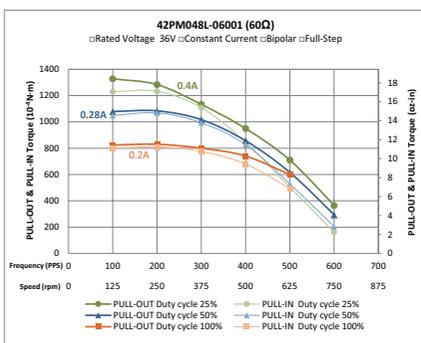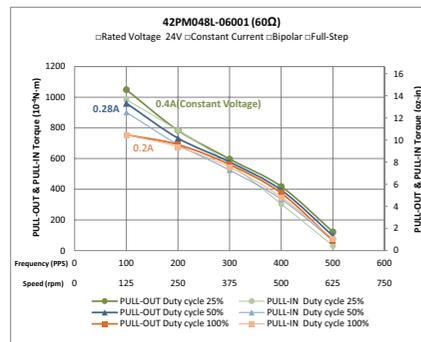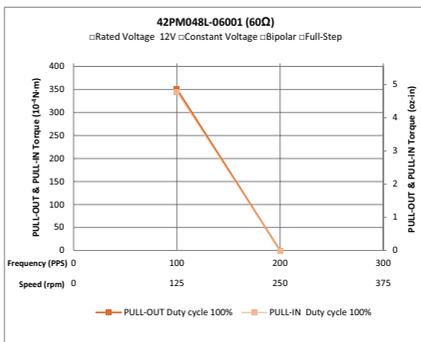

42PM096L - Ø42mm, L, 3.75°




- Phases 2
- Steps / Revolution 3.75°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data




Model Number			42PM096L8-00301	42PM096L8-00701	42PM096L8-06001
Length			21.3 mm (0.84 in.)		
Step Angle	°		3.75		
Rated Current	Amps		0.85	0.55	0.2
Holding Torque	10 ⁻⁴ Nm	Typ.	800	800	800
	oz-in	Typ.	11.11	11.11	11.11
Coil Resistance	Ohms	±10% @ 20°C	3.1	7	60
Coil Inductance	mH	Typ.	5.5	12.1	100
Detent Torque	10 ⁻⁴ Nm	Max.	120	120	120
	oz-in	Max.	1.67	1.67	1.67
Rotor Inertia	gcm ²		11.57	11.57	11.57
	10 ⁻⁴ oz-in ²		601	601	601
Motor Weight	g		120		
	Lbs		0.26		

^ Preferred model




Dimensions: mm

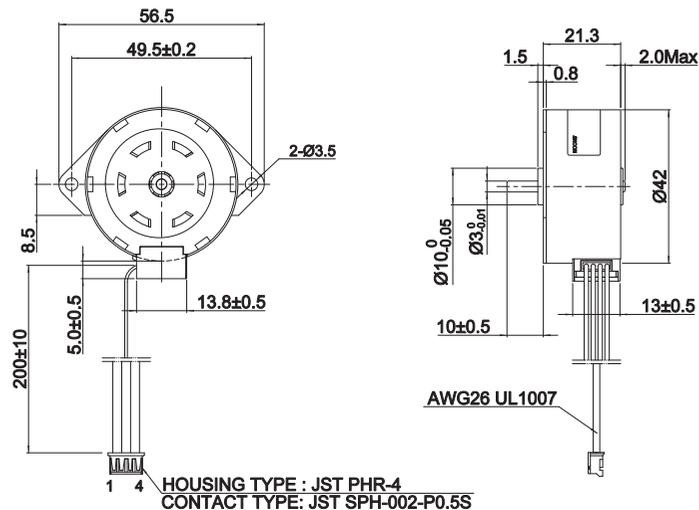




42PM096L8-00301

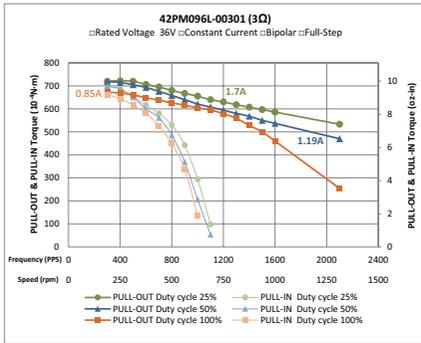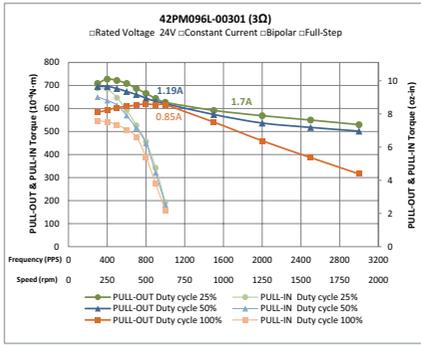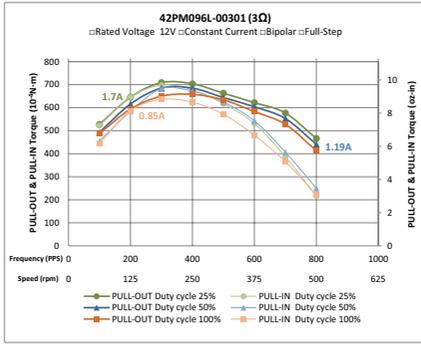

42PM096L8-00701

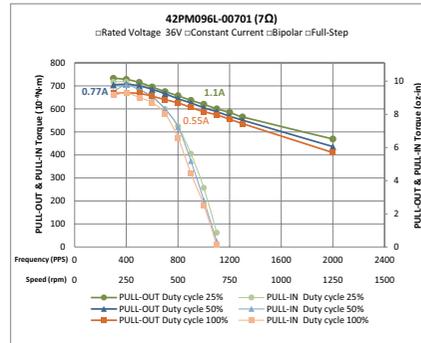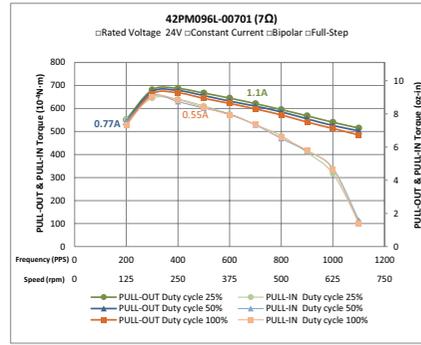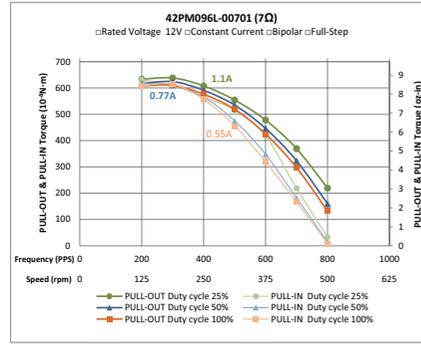

42PM096L8-06001

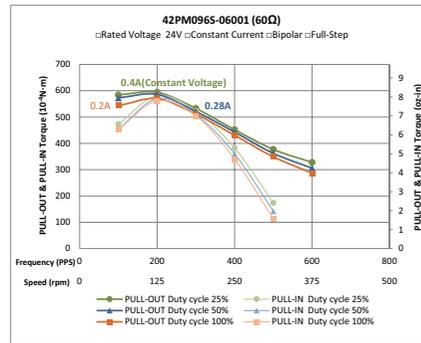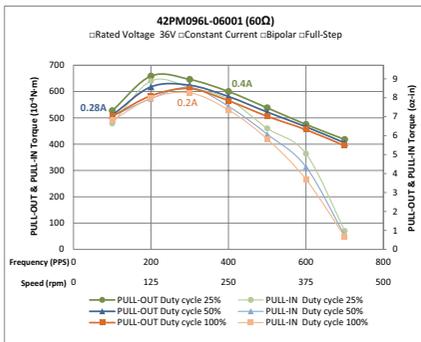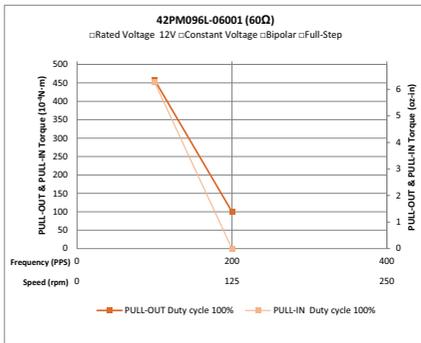

42PM100L - Ø42mm, S, 3.6°




- Phases 2
- Steps / Revolution 3.6°
- Shaft Load
 - Axial 1N
 - Radial 7.5N
- IP Rating 40
- Approvals RoHS
- Operating Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100 MegOhms

Motor Data

Model Number			42PM100L8-00301	42PM100L8-00701	42PM100L8-06001
Length			21.3 mm (0.84 in.)		
Step Angle	°		3.6		
Rated Current	Amps		0.85	0.55	0.2
Holding Torque	10 ⁻⁴ Nm	Typ.	850	850	850
	oz-in	Typ.	11.81	11.81	11.81
Coil Resistance	Ohms	±10% @ 20°C	3.1	7	60
Coil Inductance	mH	Typ.	5.2	11.6	98
Detent Torque	10 ⁻⁴ Nm	Max.	140	140	140
	oz-in	Max.	1.94	1.94	1.94
Rotor Inertia	gcm ²		11.57	11.57	11.57
	10 ⁻⁴ oz-in ²		601	601	601
Motor Weight	g		120		
	Lbs		0.26		

^ Preferred model

Dimensions: mm

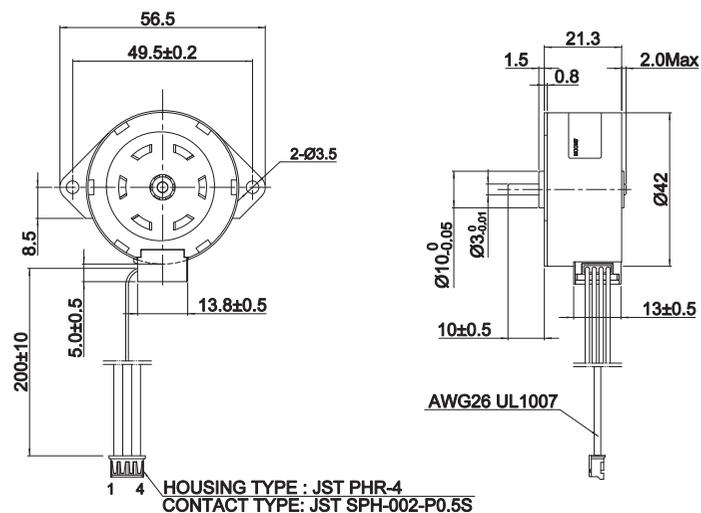

Product Overview




Rotary Motors

Linear Actuators




Gearmotors

Technical




42PM100L8-00301

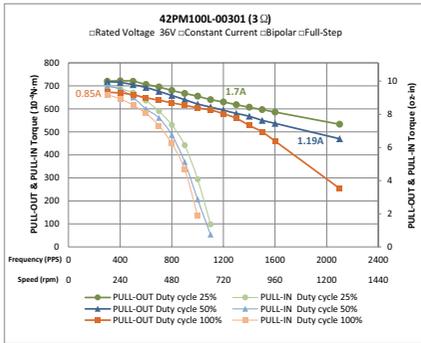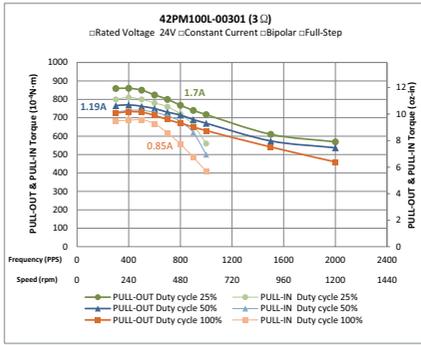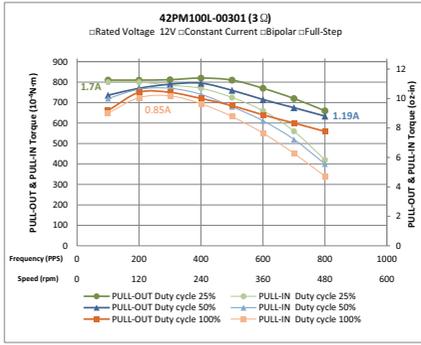

42PM100L8-00701

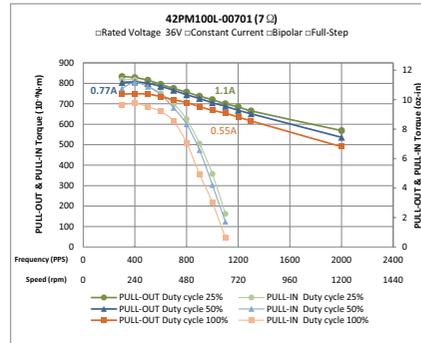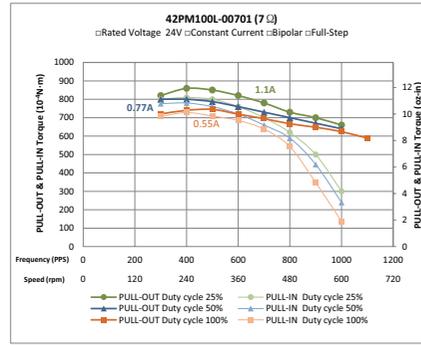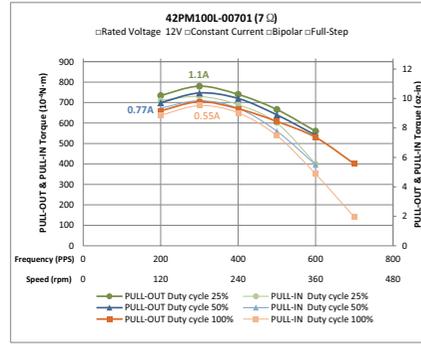

42PM100L8-06001

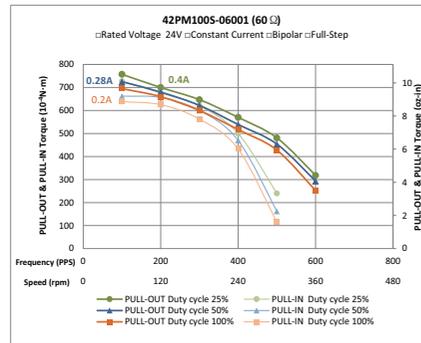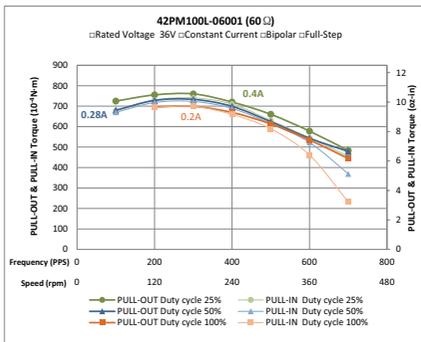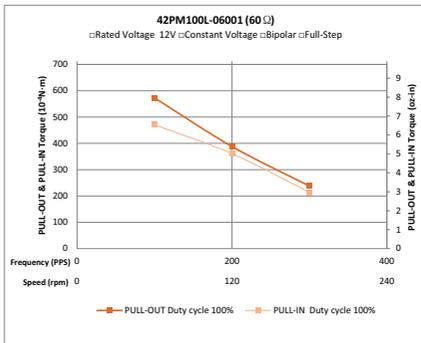

Linear Actuators

- Ø20mm
- Ø25mm
- Ø28mm
- Ø35mm



20LN024M0 - 00601 Non-Captive

Product Overview




- Phases 2
- Steps 24
- Shaft Stroke 20 mm
- Linear Step Travel 0.0254 mm
- Bearing System 2 Ball Bearings
- Ambient Temp. -10°C to +65°C
- Insulation Class B, 130°C
- Insulation Resistance 20MegOhms



Rotary Motors

Motor Data

Model Number		20LN024M0-00601	
Step Angle	°		15
Constant Current	Amps		0.4
Holding Force	N	Typ.	30
	oz	Typ.	107.9
Coil Resistance	Ohms	±7% @ 25°C	5.8
Coil Inductance	mH	±15%	2.85
Pull/Push Force	N	@ 400pps	9
	oz		32.4
Rated Net Weight	g		27
	Lbs		0.060

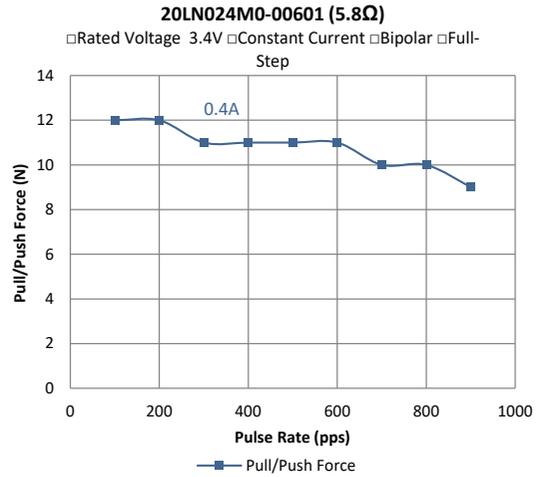

Dimensions: mm

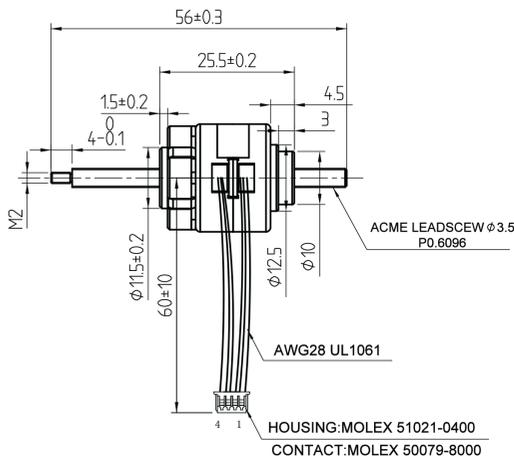

Linear Actuators

Gearmotors

Technical

20LN024L8 - 00602 Captive




- Phases 2
- Steps 24
- Shaft Stroke 12.5 mm
- Linear Step Travel 0.0254 mm
- Bearing System 2 Ball Bearings
- Ambient Temp. -10°C to +65°C
- Insulation Class B, 130°C
- Insulation Resistance 20MegOhms

Product Overview


Motor Data

Model Number		20LN024L8-00602	
Step Angle	°	15	
Constant Current	Amps	0.4	
Holding Force	N	Typ.	
	oz	Typ.	
Coil Resistance	Ohms	±7% @ 25°C	6.8
Coil Inductance	mH	±15%	3.29
Pull/Push Force	N	@ 400pps	23
	oz		82.7
Rated Net Weight	g		32
	Lbs		0.071

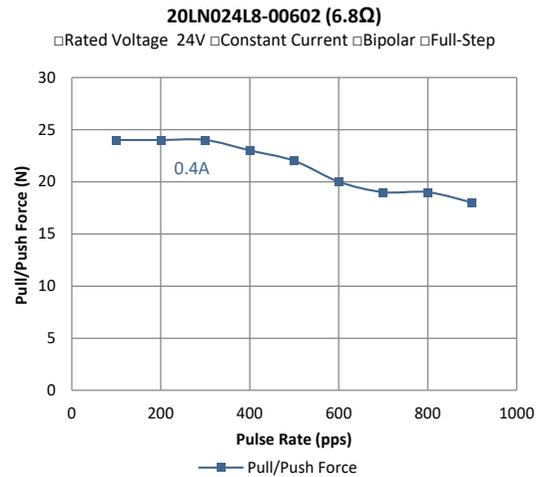

Rotary Motors

Dimensions: mm

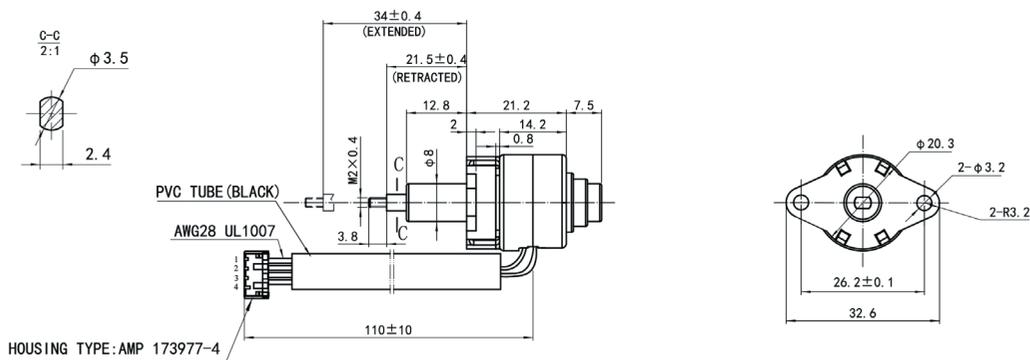

Linear Actuators

Gearmotors

Technical

25LN024L4 - 00801 Non-Captive




- Phases 2
- Steps 24
- Shaft Stroke 20 mm
- Linear Step Travel 0.0508 mm
- Bearing System 2 Ball Bearings
- Ambient Temp. -10°C to +65°C
- Insulation Class B, 130°C
- Insulation Resistance 20MegOhms

Motor Data


Model Number		25LN024L4-00801
Step Angle	° 15	
Constant Current	Amps 0.5	
Holding Force	N	Typ. 40
	oz	Typ. 143.9
Coil Resistance	Ohms	±7% @ 25°C 8.5
Coil Inductance	mH	±15% 4.5
Pull/Push Force	N	@ 400pps 31.5
	oz	
Rated Net Weight	g 45	
	Lbs 0.099	

25LN024L4-00801 (8.5Ω)

□ Rated Voltage 24V □ Constant Current □ Bipolar □ Full-Step

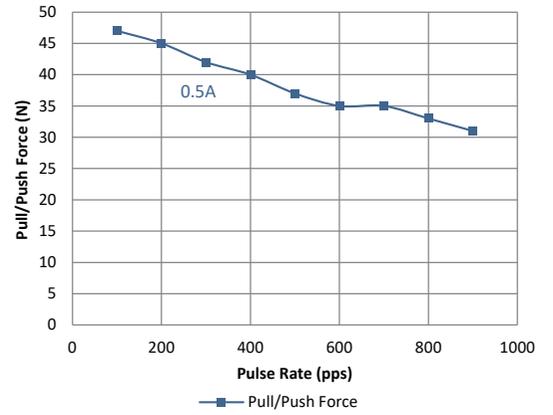

Dimensions: mm

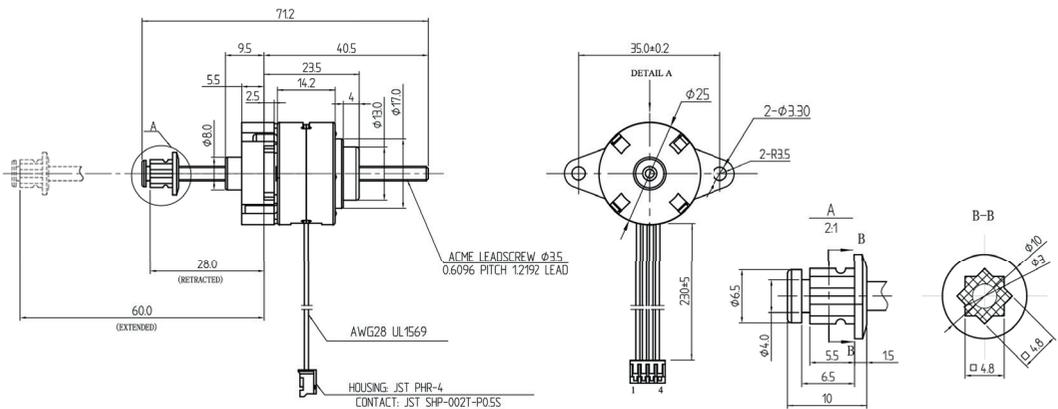

25LN024S8 - 01402 Captive




- Phases 2
- Steps 24
- Shaft Stroke 13 mm
- Linear Step Travel 0.0254 mm
- Bearing System 2 Ball Bearings
- Ambient Temp. -10°C to +65°C
- Insulation Class B, 130°C
- Insulation Resistance 20MegOhms

Product Overview


Motor Data

Model Number		25LN024S8-01402	
Step Angle	°		15
Constant Current	Amps		0.35
Holding Force	N	Typ.	40
	oz	Typ.	143.9
Coil Resistance	Ohms	±7% @ 25°C	14
Coil Inductance	mH	±15%	9.1
Pull/Push Force	N	@ 400pps	32
	oz		115.1
Rated Net Weight	g		45
	Lbs		0.099

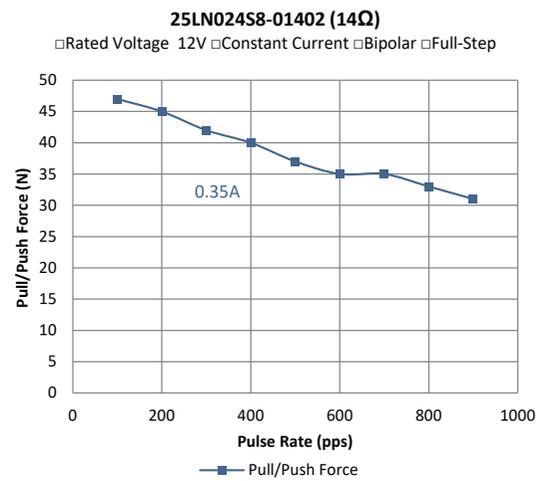

Rotary Motors

Dimensions: mm

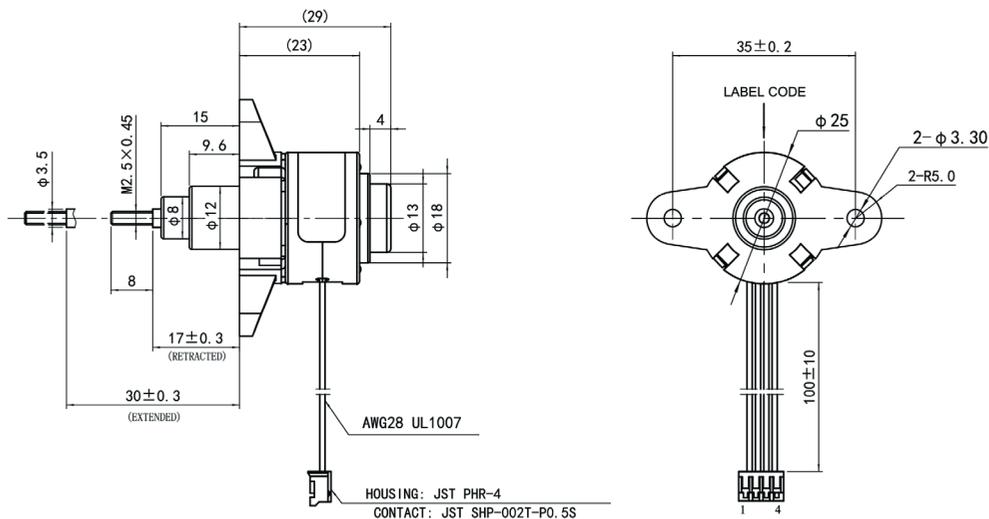

Linear Actuators

Gearmotors

Technical


28LN024L8 - 15002 Captive




- Phases 2
- Steps 24
- Shaft Stroke 13 mm
- Linear Step Travel 0.042 mm
- Bearing System 2 Ball Bearings
- Ambient Temp. -10°C to +80°C
- Insulation Class B, 130°C
- Insulation Resistance 20MegOhms

Motor Data

Model Number		28LN024L8-15002	
Step Angle	°		15
Constant Current	Amps		0.13
Holding Force	N	Typ.	
	oz	Typ.	
Coil Resistance	Ohms	±7% @ 25°C	150
Coil Inductance	mH	±15%	112
Pull/Push Force	N	@ 400pps	45
	oz		161.9
Rated Net Weight	g		45
	Lbs		0.099

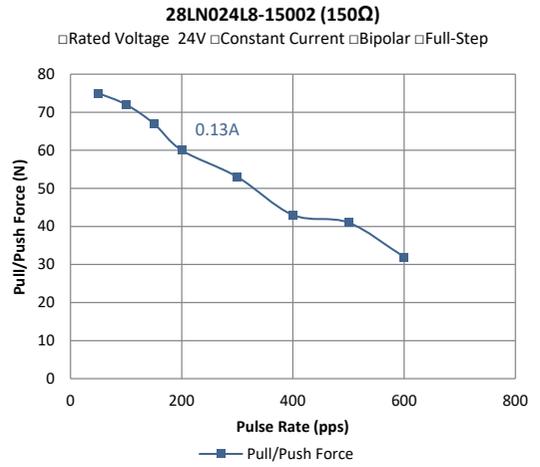

Dimensions: mm

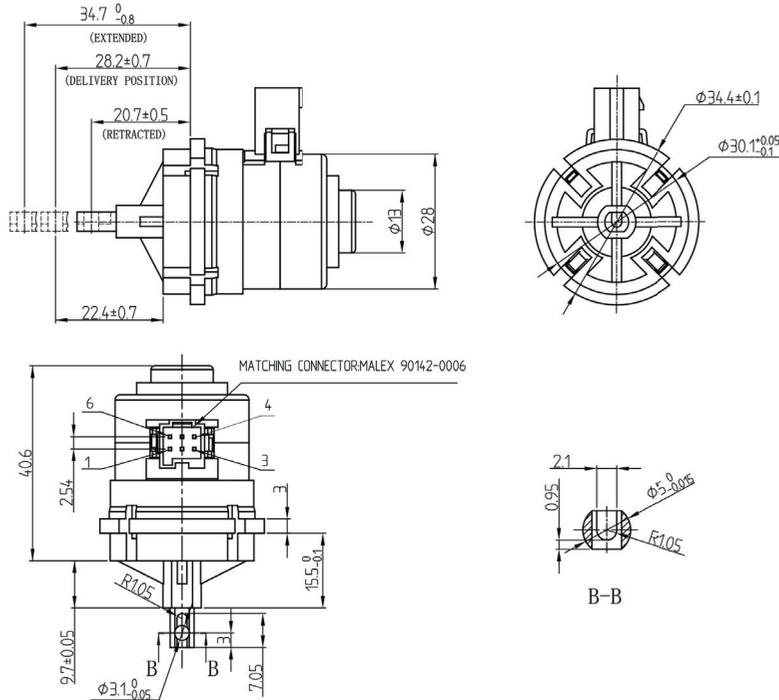

35LN024L6 - 00501 Non-Captive




- Phases 2
- Steps 24
- Shaft Stroke 36 mm
- Linear Step Travel 0.0333 mm
- Bearing System 2 Ball Bearings
- Ambient Temp. -20°C to +50°C
- Insulation Class B, 130°C
- Insulation Resistance 100MegOhms

Product Overview



Motor Data

Model Number		35LN024L6-00501	
Step Angle	°	15	
Constant Current	Amps	0.8	
Holding Force	N	Typ.	
	oz	Typ.	
Coil Resistance	Ohms	±7% @ 25°C	4.6
Coil Inductance	mH	±15%	5
Pull/Push Force	N	@ 400pps	50
	oz		179.9
Rated Net Weight	g		
	Lbs		

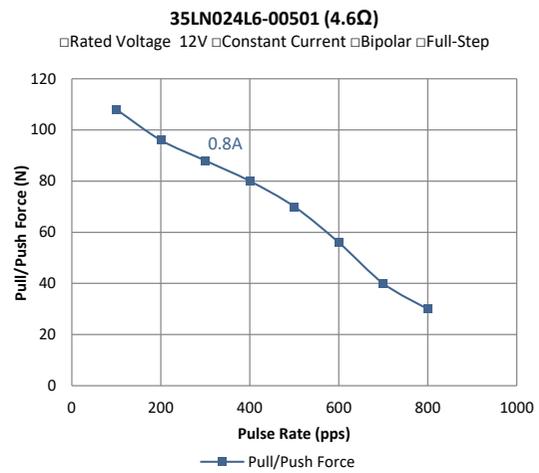

Rotary Motors

Dimensions: mm

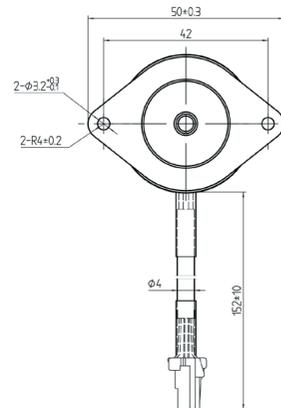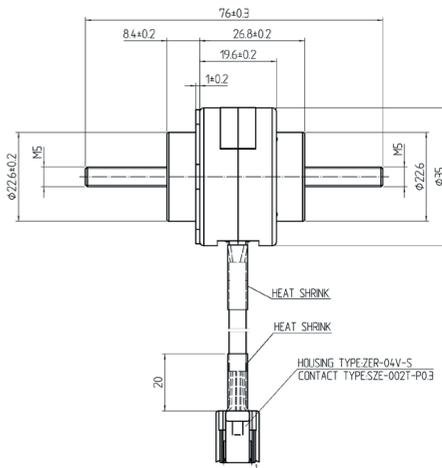

Linear Actuators

Gearmotors

Technical

35LN024LF - 00805 Captive

Product Overview




- Phases 2
- Steps 24
- Shaft Stroke 12 mm
- Linear Step Travel 0.0333 mm
- Bearing System 2 Ball Bearings
- Ambient Temp. -40°C to +120°C
- Insulation Class B, 130°C
- Insulation Resistance 100MegOhms


Rotary Motors

Motor Data

Model Number		35LN024LF-00805	
Step Angle	°		15
Constant Current	Amps		0.566
Holding Force	N	Typ.	110
	oz	Typ.	395.7
Coil Resistance	Ohms	±7% @ 25°C	7.7
Coil Inductance	mH	±15%	9.75
Pull/Push Force	N	@ 400pps	50
	oz		179.9
Rated Net Weight	g		
	Lbs		

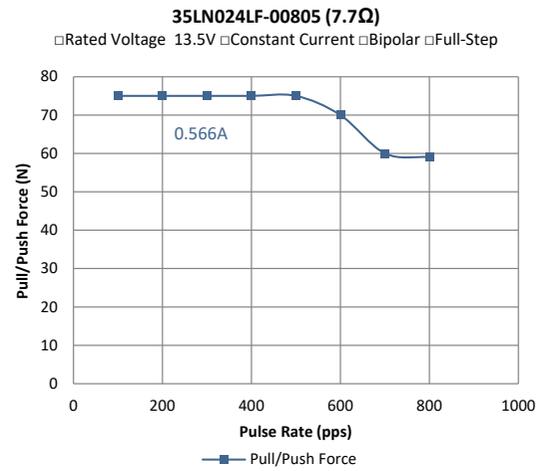

Dimensions: mm

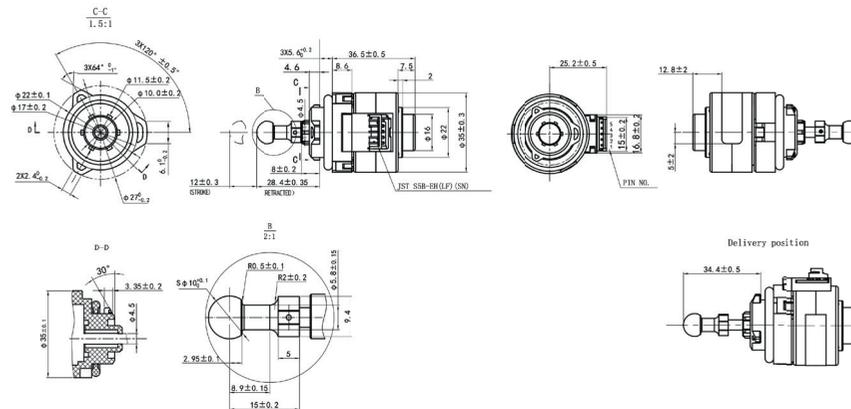

Linear Actuators

Gearmotors


Technical

Gearmotor

PG15L

PG16L

PG22L

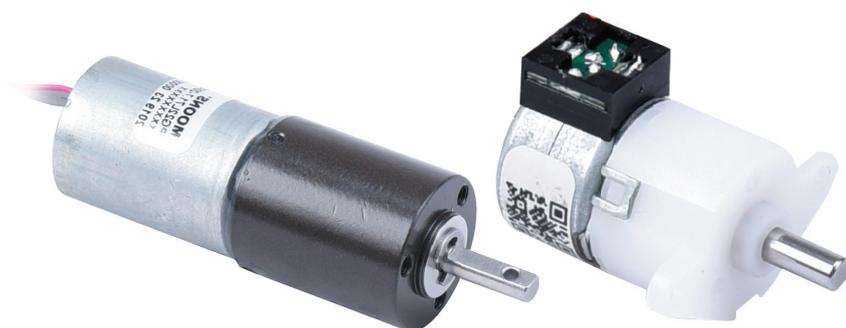


PG15L0050-15PM020S0-02




Motor Data

Phases		2
Steps/Revolution		18°/50(0.36°)
Rated Voltage	Vdc	5
Frame Size	mm	15mm
Length	mm	22.5
Holding Torque	mNm	49 @200pps
	oz-in	
Gear Ratio		50:1
Resistance	Ohms ±10%@20°C	10
Coil Type		Bi-Polar
Insulations Class		Class E(120°C)
IP Rating		IP40
Weight	g	11

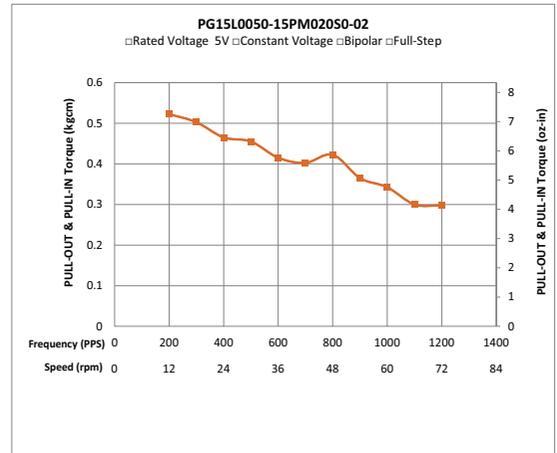


Dimensions: mm

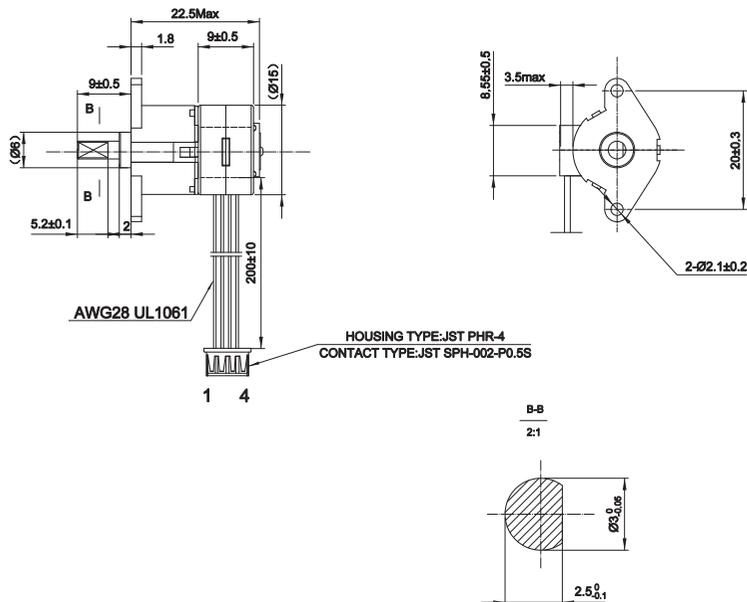




Motor Data

Phases		2
Steps/Revolution		18°/64(0.28°)
Rated Voltage	Vdc	9
Frame Size	mm	20mm
Length	mm	55
Holding Torque	mNm	180 @ 1080pps
	oz-in	
Gear Ratio		64:1
Resistance	Ohms ±10% @ 20°C	7.6
Coil Type		Bi-Polar
Insulations Class		Class B(130°C)
IP Rating		IP54
Weight	g	100

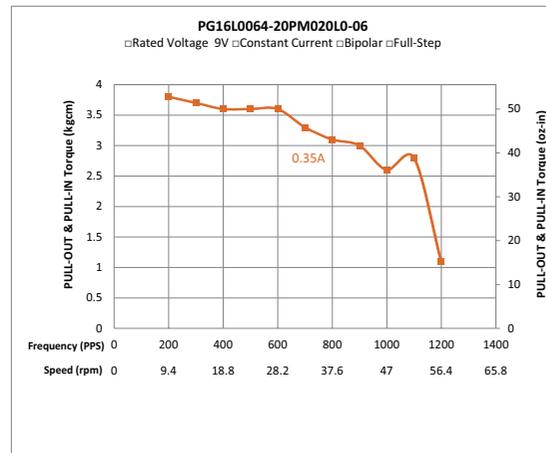

Dimensions: mm

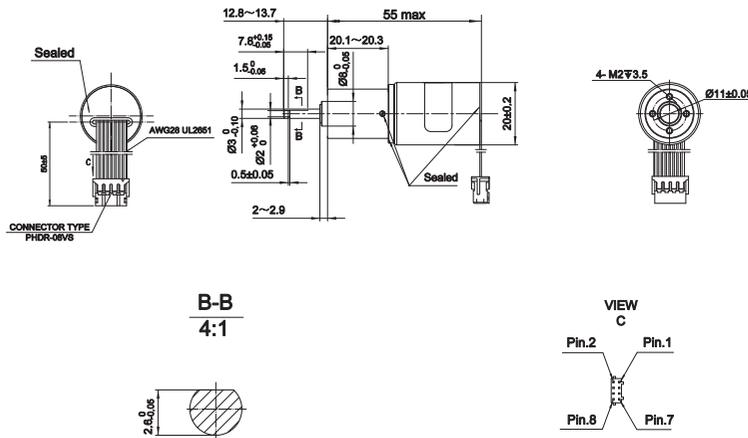


PG22L45.2-20PM020L0-11




Motor Data

Phases		2
Steps/Revolution		18°/45(0.4°)
Rated Voltage	Vdc	8.5
Frame Size	mm	22mm
Length	mm	60
Holding Torque	mNm	200 @753pps
	oz-in	
Gear Ratio		45.2:1
Resistance	Ohms ±10%@20°C	6.4
Coil Type		Bi-Polar
Insulations Class		Class B(130°C)
IP Rating		IP56
Weight	g	120

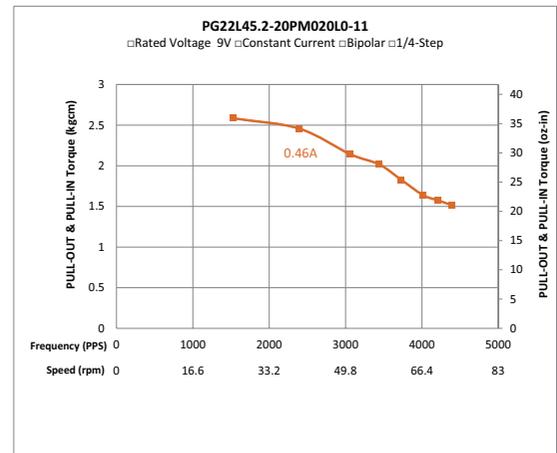

Dimensions: mm

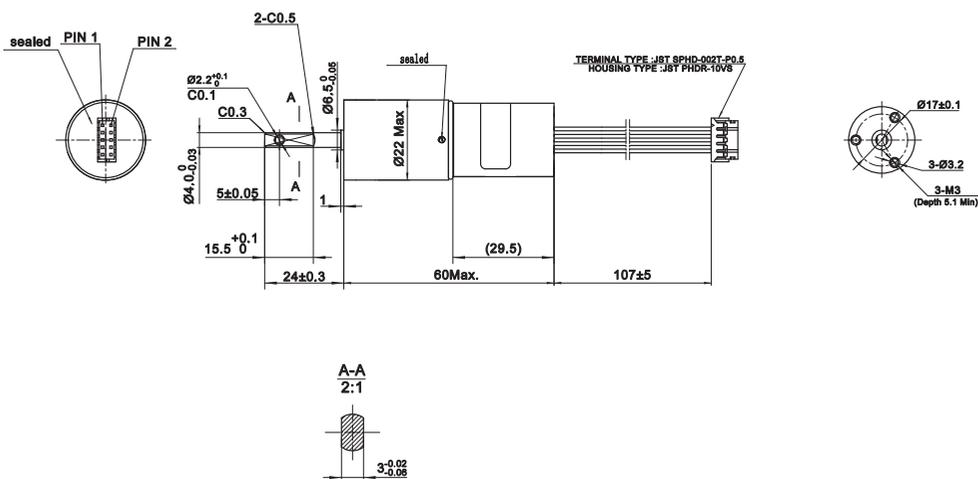

Product Overview

Rotary Motors

Linear Actuators


Gearmotors

Technical




Motor Data

Phases		2
Steps/Revolution		18°/72(0.25°)
Rated Voltage	Vdc	9.2
Frame Size	mm	22mm
Length	mm	55
Holding Torque	mNm	420 @384pps
	oz-in	
Gear Ratio		71.7:1
Resistance	Ohms ±10%@20°C	6.4
Coil Type		Bi-Polar
Insulations Class		Class B(130°C)
IP Rating		IP56
Weight	g	100

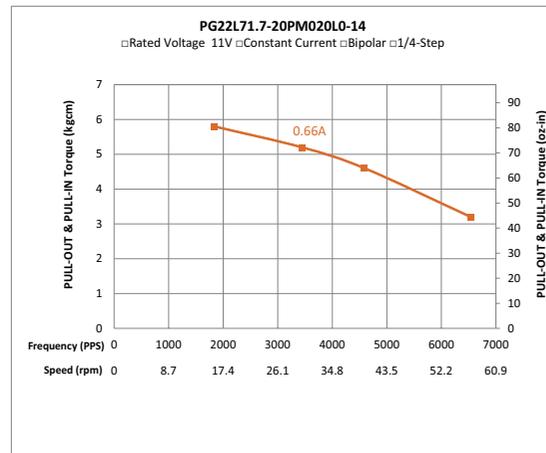

Dimensions: mm

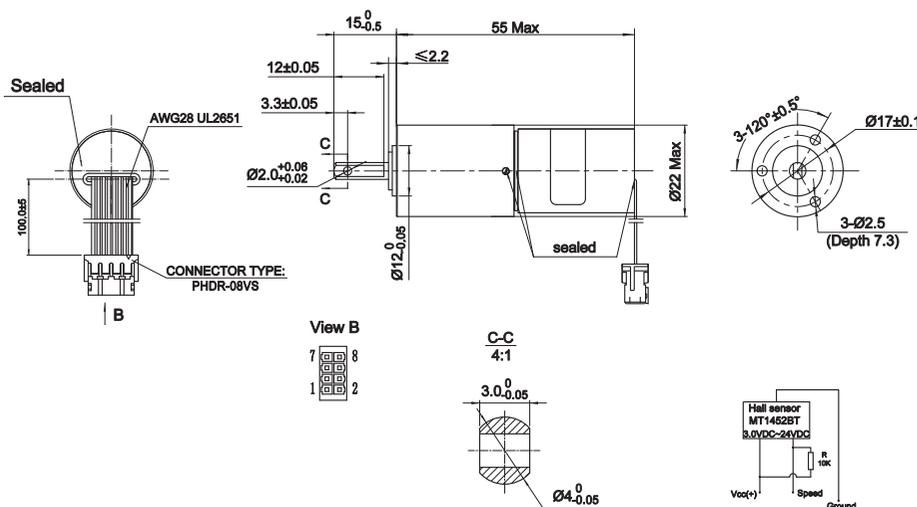

PG22L71.7-25PM024L0-01


Product Overview




Rotary Motors

Motor Data

Phases		2
Steps/Revolution		15°/72(0.21°)
Rated Voltage	Vdc	11
Frame Size	mm	25mm
Length	mm	58
Holding Torque	mNm	500 @ 457pps
	oz-in	
Gear Ratio		71.7:1
Resistance	Ohms ±10% @ 20°C	4
Coil Type		Bi-Polar
Insulations Class		Class B(130°C)
IP Rating		IP56
Weight	g	100

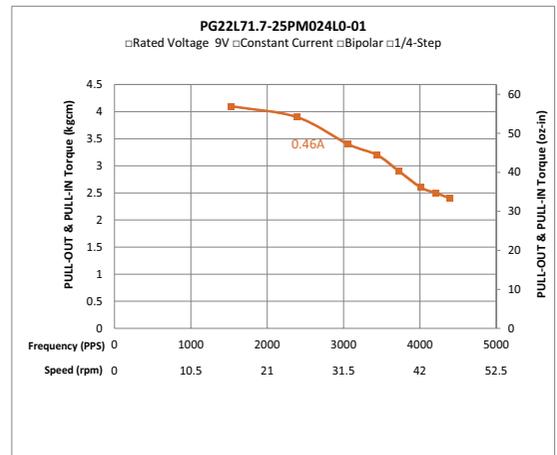

Dimensions: mm

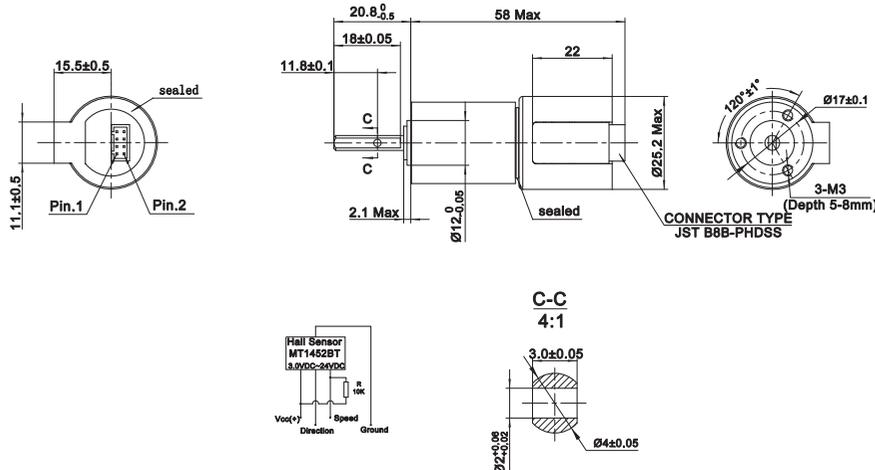


Linear Actuators

Gearmotors

Technical

Speed-Torque Characteristics

The dynamic torque curve is an important aspect of stepping motor's output performance. The followings are some keyword explanations.

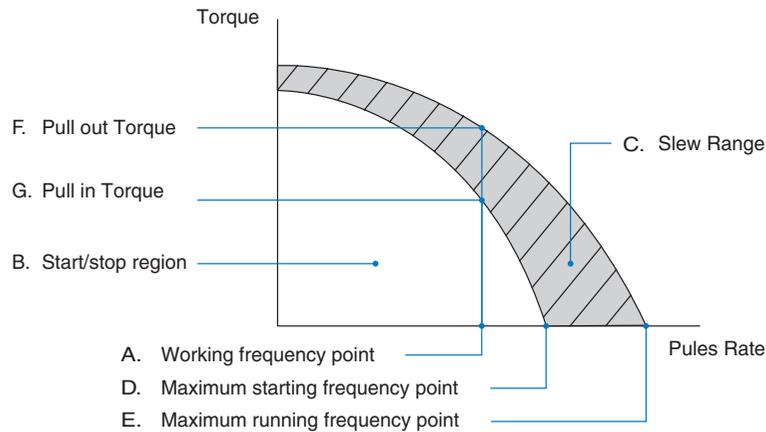

A. Working frequency point express the stepping motors rotational speed versus the drive pulse rate.

$$n = q * \text{Hz} / (360 * D)$$

n: rev/sec

Hz: the frequency value or the driver pulse rate.

D: the subdividing value of motor driver

q: the step angle of stepping motor

B. Start/Stop region: the region in which a stepping motor can be directly started or stopped.

C. Slew Range: the motor cannot be started directly in this area. It must be started in the start/stop region first and then accelerated to this area. In this area, the motor can not be directly stopped, either. Otherwise this will lead to losing-step. The motor must be decelerated back to the start/stop region before it can be stopped.

D. Maximum starting frequency point at this point, the stepping motor can reach its maximum starting speed under unloaded condition.

E. Maximum running frequency point at this point the stepping motor can reach its maximum running speed under an unloaded condition.

F. Pull-in Torque: the maximum dynamic torque value that a stepping motor can load directly at the particular operating frequency point.


G. Pull-out Torque: the maximum dynamic torque value that a stepping motor can load at the particular operating frequency point when the motor has been started. Because of the inertia of rotation the Pull-Out Torque is always larger than the Pull-In Torque.

About Rated Current


Rated current of PM stepper is limited by thermal characteristics.

In actual application, to get higher output torque we can supply with higher current, which extend rated value. In such case, the motor can't be in continuous working, otherwise the winding will be overheat even damage device. Duty cycle need to be not reach to 100%, also we must consider Max. working time - Ton Max.


How to define the duty cycle with multiple of rated current

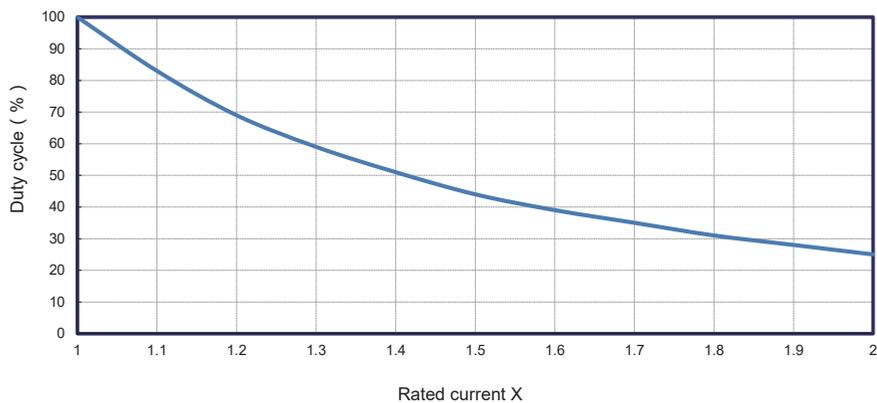

How to calculate the max. Single working time with multiple of rated current

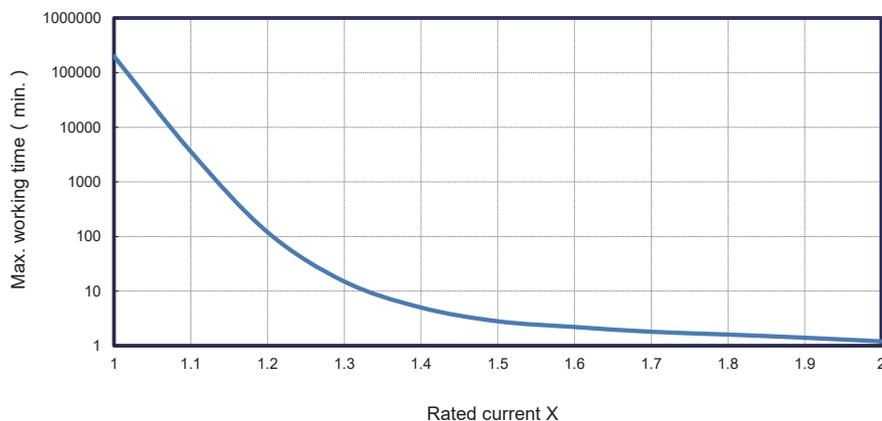

Motor winding temperature rising curve

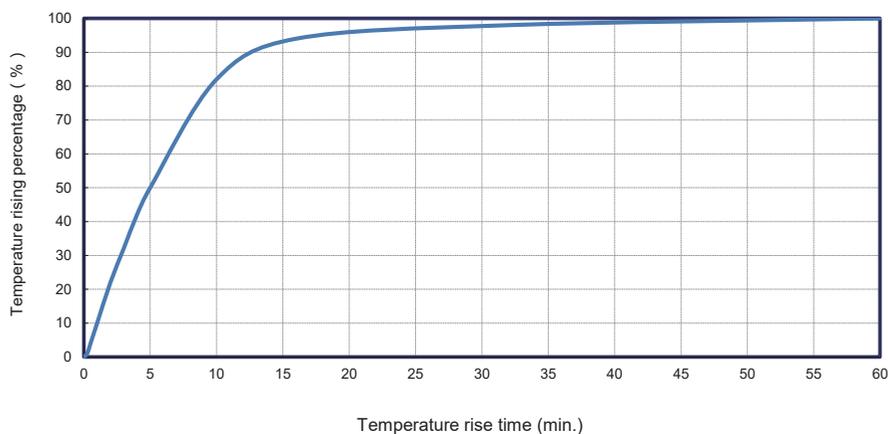

Conversion Factors

• Length

A \ B	mm	cm	m	inch	feet
mm	--	0.1	0.001	0.03937	0.003281
cm	10	--	0.01	0.3937	0.03281
m	1,000	100	--	39.37	3.281
inch	25.4	2.54	0.0254	--	0.08333
feet	304.8	30.48	0.348	12	--

Multiply "A" units
by conversion factor
to obtain "B" units

• Force

A \ B	g	kgf	oz	lb	Newton
g	--	0.001	0.03527	0.002205	0.0098
kgf	1,000	--	35.27	22.05	9.807
oz	28.35	0.02835	--	0.0625	0.278
lb	453.6	0.4536	16	--	4.448
Newton	102	0.102	3.597	0.2248	--

• Torque

A \ B	Nm	Ncm	mNm	kgm*	kgcm*	gcm*	oz-in	lb-ft	lb-in
Nm	--	100	1,000	0.102	10.2	10,200	141.6	0.7376	8.851
Ncm	0.01	--	10	0.00102	0.102	102	1.416	0.007376	0.08851
mNm	0.001	0.1	--	0.000102	0.0102	10.2	0.1416	0.000738	0.008851
kgm*	9.807	980.7	9807	--	100	100,000	1,389	7.233	86.8
kgcm*	0.09807	9.807	98.07	0.01	--	1,000	13.89	0.07233	0.868
gcm*	9.81E-05	0.009807	0.09807	0.00001	0.001	--	0.01389	7.23E-05	0.000868
oz-in	0.007062	0.7062	7.062	0.00072	0.07201	72.01	--	0.00521	0.0625
lb-ft	1.356	135.6	135.6	0.1383	13.83	13,830	192	--	12
lb-in	0.113	11.3	113	0.01152	1.152	1,152	16	0.0833	--

• Inertia

A \ B	kgm ²	kgcm ²	gcm ²	oz-in ²	oz-in-sec ²	lb-in ²	lb-in-sec ²	lb-ft ²	lb-ft-sec ² (slug ft ²)
kgm ²	--	10,000	10,000,000	54,700	142	3,420	8.85	23.7	0.738
kgcm ²	0.0001	--	1,000	5.47	0.0142	0.342	0.000885	0.00237	7.38E-05
gcm ²	1E-07	0.001	--	0.00547	1.42E-05	0.000342	8.85E-07	2.37E-06	7.38E-08
oz-in ²	1.83E-05	0.1829	183	--	0.00259	0.0625	0.000162	0.000434	1.35E-05
oz-in-sec ²	0.00706	70.62	70,600	386	--	24.1	0.0625	0.168	0.00521
lb-in ²	0.000293	2.926	2,930	16	0.0414	--	0.00259	0.00694	0.000216
lb-in-sec ²	0.113	1,130	1,130,000	6,180	1.6	386	--	2.68	0.0833
lb-ft ²	0.0421	421.4	421,000	2,300	5.97	144	0.373	--	0.318
lb-ft-sec ² (slug ft ²)	1.36	13,600	13,600,000	74,100	192	4,630	12	32.2	--

■ MOONS' Headquarter

Shanghai

168 Mingjia Road, Minhang District,
Shanghai 201107, P.R. China
Tel: +86 (0)21 52634688
Fax: +86 (0)21 52634098

■ Domestic Sales Offices

Shenzhen

Room 503, Building A7, Nanshan iPark,
No. 1001, Xueyuan Ave, Nanshan District,
Shenzhen 518071, P.R. China
Tel: +86 (0)755 25472080
Fax: +86 (0)755 25472081

Beijing

Room 1206, Jing Liang Mansion, No. 16
Middle Road of East 3rd Ring, Chaoyang
District, Beijing 100022, P.R. China
Tel: +86 (0)10 87661889
Fax: +86 (0)10 87661880

Nanjing

Room 1101-1102, Building 2, New Town
Development Center, No. 126 Tianyuan
Middle Road, Jiangning District,
Nanjing 211106, P.R. China
Tel: +86 (0)25 52785841
Fax: +86 (0)25 52785485

Qingdao

Room 1012, Zhuoyue Tower,
No. 16 Fengcheng Road, Shibei District,
Qingdao 266000, P.R. China
Tel: +86 (0)532 80969935
Fax: +86 (0)532 80919938

Wuhan

Room 3001, World Trade Tower,
686 Jiefang Avenue, Jiangnan District,
Wuhan 430022, P.R. China
Tel: +86 (0)27 85448742
Fax: +86 (0)27 85448355

Chengdu

Room 1917, Western Tower, 19, 4th
Section of South People Road, Wuhou
District, Chengdu 610041, P.R. China
Tel: +86 (0)28 85268102
Fax: +86 (0)28 85268103

Xi' an

Room 1006, Tower D, Wangzuo
International City, 1 Tangyan Road,
Yanta District, Xi' an 710065, P.R. China
Tel: +86 (0)29 81870400
Fax: +86 (0)29 81870340

Ningbo

Room 309, Tower B, Taifu Plaza,
565 Jiangjia Road, Jiangdong District,
Ningbo 315040, P.R. China
Tel: +86 (0)574 87052739
Fax: +86 (0)574 87052365

Guangzhou

Room 4006, Tower B, China Shine Plaza,
No. 9 Linhe Xi Road, Tianhe District,
Guangzhou 510610, P.R. China
Tel: +86 (0)20 38010153
Fax: +86 (0)20 38103661

Chongqing

Rm. 2108, South yuanzhu Buliding 20,
No. 18 Fuquan Rd. , Jiangbei District,
Chongqing 400000, P.R. China.
Tel: +86 (0)23 67601782
Fax: +86 (0)23 67085997

■ MOONS' International Trading (Shanghai) Co., Ltd.

4/F, Building 30, No. 69 Guiqing Road,
Caohejin Hi-Tech Park, Xuhui District,
Shanghai 200233, P.R. China
Tel: +86 (0)21 64952755
Fax: +86 (0)21 64859949

■ Changzhou Yunkong Electronic Co., Ltd.

BLDC.2, Henglin Technology Innovation
Center No. 88 East Changhong Road Wujin
District, Changzhou 213100, P.R. China
Tel: +86 (0)519 88700355
Fax: +86 (0)519 88700229

■ Lin Engineering At Nanjing

No. 1 Xinke 1st Road, Pukou High-tech
Development Zone, Pukou District, Nanjing
210032, P.R. China
Tel: +86 (0)25 58844665
Fax: +86 (0)25 58690086

■ North America

MOONS' INDUSTRIES (AMERICA), INC.

Head Office
1113 North Prospect Avenue, Itasca, IL 60143 USA
Tel: +1 630 8335940
Fax: +1 630 8335946
Boston Office
36 Cordage Park Circle, Suite 310
Plymouth, MA 02360 USA

APPLIED MOTION PRODUCTS, INC.

404 Westridge Dr. Watsonville, CA 95076, USA
Tel: +1 831 7616555

LIN ENGINEERING, INC.

16245 Vineyard Blvd., Morgan Hill, CA 95037
Tel: +1 408 9190200
Fax: +1 408 9190201

■ Europe

MOONS' INDUSTRIES (EUROPE) S.R.L.

Via Torri Bianche n.1 20871
Vimercate(MB) Italy
Tel: +39 (0)39 6260521
Fax: +39 (0)39 9631409

AMP & MOONS' AUTOMATION (GERMANY) GMBH

Börsenstraße 14
60313 Frankfurt am Main Germany

TECHNOSOFT S.A.

Technosoft (Suisse) SA

Avenue des Alpes 20, 2000 Neuchâtel,
Switzerland.
Tel: +41 (0)32 7325500
Fax: +41 (0)32 7325504

TECHNOSOFT International

Strada Paduretu nr. 50, Sector 6 061992
Bucuresti ROMANIA
Tel: +40 (0)21 4259095
Fax: +40 (0)21 4259097

■ South-East Asia

MOONS' INDUSTRIES (SOUTH-EAST ASIA) PTE. LTD.

33 Ubi Avenue 3 #08-23
Vertex Singapore 408868
Tel: +65 66341198
Fax: +65 66341138

■ Japan

MOONS' INDUSTRIES JAPAN CO., LTD.

Room 602, 6F, Shin Yokohama Koushin
Building, 2-12-1, Shin-Yokohama,
Kohoku-ku, Yokohama, Kanagawa,
222-0033, Japan
Tel: +81 (0)45 4755788
Fax: +81 (0)45 4755787



[http:// www.moons.com.cn](http://www.moons.com.cn)
E-mail: info@moons.com.cn

MOONS'
moving in better ways

- All specifications and technical parameters of the products provided in this catalog are for reference only, and are subject to change without notice. For details, please contact our sales team.