

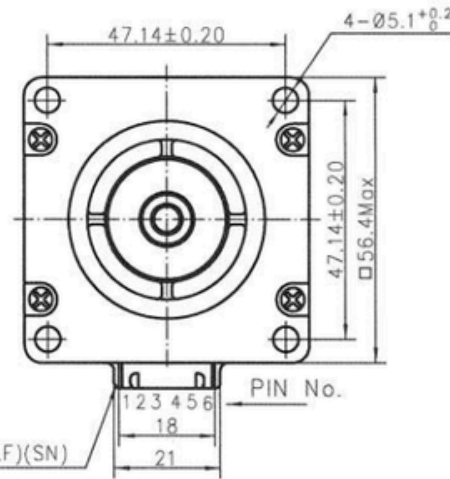
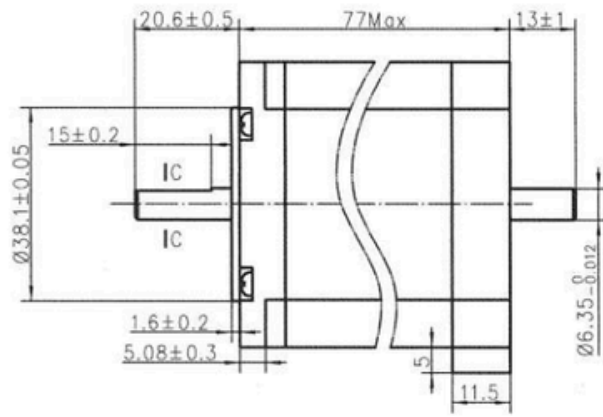


4611110011496

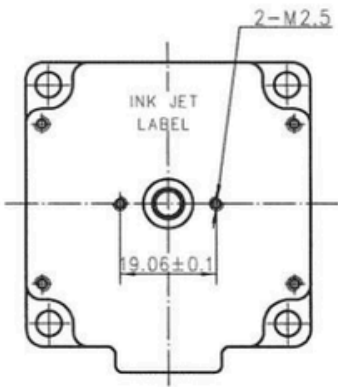

Wiring Diagram



Exciting Sequence vs. Direction of Rotation



STEP	A	B	C	D	
1	+	+	-	-	ccw
2	-	+	+	-	
3	-	-	+	+	cw
4	+	-	-	+	

Clockwise view from mounting side

Specifications


1. Number of Phase	2
2. Step Angle	1.8°
3. Rated Voltage	3.3 V DC
4. Rated Current	3 Amp
5. Holding Torque	2.3 N.m Typ (Two phase on/rated current)
6. Phase Resistance	1.1 ohm±10%(20°C)
7. Phase Inductance	4.5 mH±20%(1kHz 1V rms)
8. Rotor Inertia	365g.cm ²
9. Motor Weight	0.84kg
10. Insulation Class	B(130°C)

Label Detail

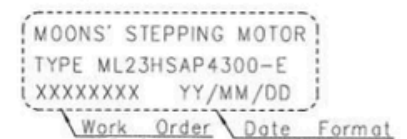

Unit: mm

FIRST ANGLE METHOD



Tolerance for linear and angular dimensions without individual tolerance indications
GB/T 1804-m eqv ISO 2768-1 : m

Geometrical tolerance for features without individual tolerance indications
GB/T 1184-K eqv ISO 2768-2 : K

Approve	
Standardize	
Process Review	
Check	
Design	

PIVEXIN
TECHNOLOGY

REV.	REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	Type: ML23HSAP4300-E	Rev.A	SCALE 1:1	Sheet 1 of 1
------	-----------------	------	----------------------------	-------	-----------	------	----------------------	-------	-----------	--------------