



4611110027600

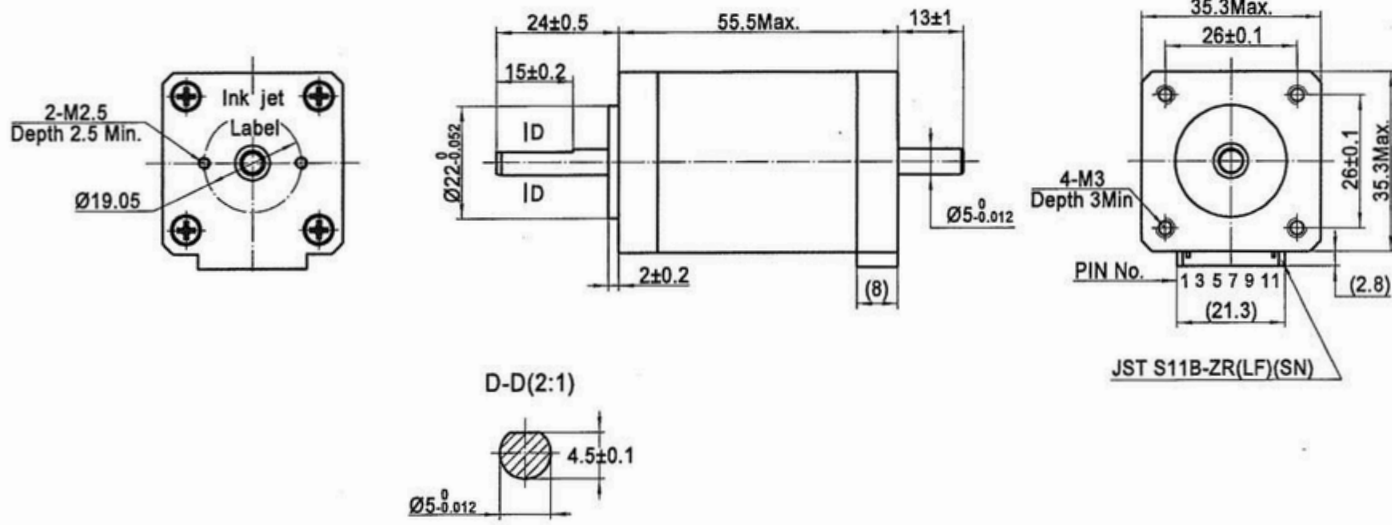

Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	CCW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

CW

Clockwise view from mounting side



Specification

1. Number of Phase	2
2. Step Angle	1.8°
3. Rated Voltage	3.3V DC
4. Rated Current	1.5Amp
5. Holding Torque	0.4Nm Typ.(Two phase on/rated current)
6. Phase Resistance	2.2ohm±10%(20°C)
7. Phase Inductance	3.6mH±20%(1kHz 1V rms)
8. Rotor Inertia	35gcm ²
9. Motor Weight	240g
10. Insulation Class	B(130°C)

Unit: mm

FIRST ANGLE METHOD

Tolerances for linear and angular dimensions without individual tolerance indications
GB/T 1804-m eqv ISO 2768-1 : m

Geometrical tolerance for features without individual tolerance indications
GB/T 1184-K eqv ISO 2768-2 : K

Approve	
Standardize	
Process Review	
Check	
Design	

PIVEXIN
TECHNOLOGY

REV.	REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	Type: MS14HS5P4150-M	Rev.A	SCALE 1:1	Sheet 1 of 1
------	-----------------	------	----------------------------	-------	-----------	------	----------------------	-------	-----------	--------------