

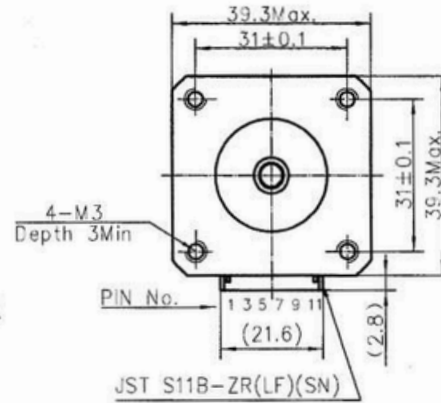
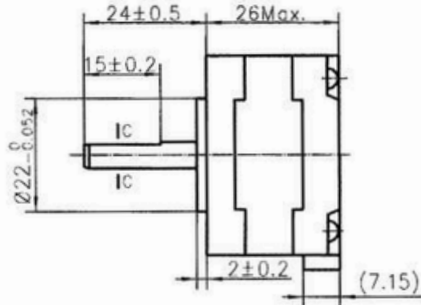


4611110015390



Wiring Diagram




Specifications

1. Number of Phase	2
2. Step Angle	1.8°
3. Rated Voltage	11.6V DC
4. Rated Current	0.29Amp
5. Holding Torque	0.2N.m Typ (Two phase on/rated current)
6. Phase Resistance	40ohm ± 10% (20°C)
7. Phase Inductance	52mH ± 20% (1kHz 1V rms)
8. Rotor Inertia	20g.cm <sup>2</sup>
9. Motor Weight	150g
10. Insulation Class	B(130°C)


Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side




Label Detail



Work Order Date Format

Unit: mm



FIRST ANGLE METHOD  
Tolerance for linear and regular dimension without individual tolerance indications  
GB/T 1804-m egv ISO 2768-1: m

Geometrical tolerance for features without individual tolerance indications  
GB/T 1184-K egv ISO 2768-2: K

Approve		
Standard		
Technology		
Check		
Design		
NAMES	SIGNATURE	DATE

**PIVEXIN**  
**TECHNOLOGY**

REV.	Original revision	14.06.2016
	REVISION RECORD	DATE

UNLESS OTHERWISE SPECIFIED