

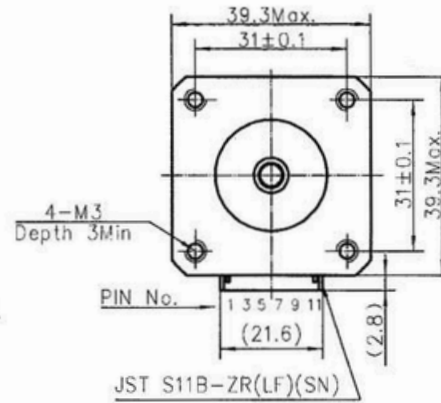
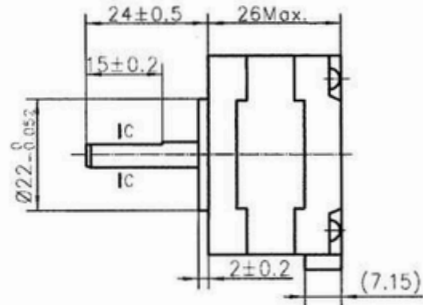


4611110015393



Wiring Diagram




Specifications

| | |
|----------------------|---|
| 1. Number of Phase | 2 |
| 2. Step Angle | 1.8° |
| 3. Rated Voltage | 2.3V DC |
| 4. Rated Current | 1.5Amp |
| 5. Holding Torque | 0.2N.m Typ (Two phase on/rated current) |
| 6. Phase Resistance | 1.53ohm ± 10% (20°C) |
| 7. Phase Inductance | 2mH ± 20% (1kHz 1V rms) |
| 8. Rotor Inertia | 20g.cm ² |
| 9. Motor Weight | 150g |
| 10. Insulation Class | B(130°C) |


Exciting Sequence vs. Direction of Rotation

| STEP | A | B | C | D | |
|------|---|---|---|---|---------------------|
| 1 | + | + | - | - | CCW ↑ ↓ CW |
| 2 | - | + | + | - | |
| 3 | - | - | + | + | |
| 4 | + | - | - | + | |

Clockwise view from mounting side




Label Detail

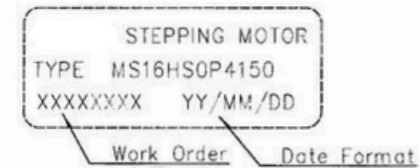

Unit: mm

FIRST ANGLE METHOD



Tolerance for linear and regular dimension without individual tolerance indications
GB/T 1804-m egv ISO 2768-1: m

Geometrical tolerance for features without individual tolerance indications
GB/T 1184-K egv ISO 2768-2: K

| | |
|------------|--|
| Approve | |
| Standard | |
| Technology | |
| Check | |
| Design | |

PIVEXIN
TECHNOLOGY

| | | | | | | | | | | |
|------|-------------------|------------|----------------------------|-------|-----------|------|--------------------|-------|-----------|--------------|
| REV. | Original revision | 14.06.2016 | UNLESS OTHERWISE SPECIFIED | NAMES | SIGNATURE | DATE | Type: MS16HS0P4150 | Rev.A | SCALE 1:1 | Sheet 1 of 1 |
|------|-------------------|------------|----------------------------|-------|-----------|------|--------------------|-------|-----------|--------------|