

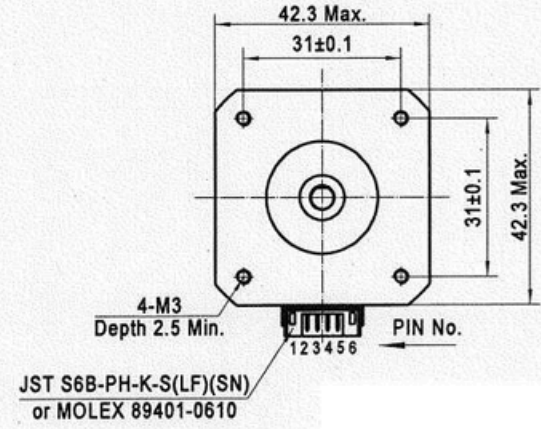


4611110027297

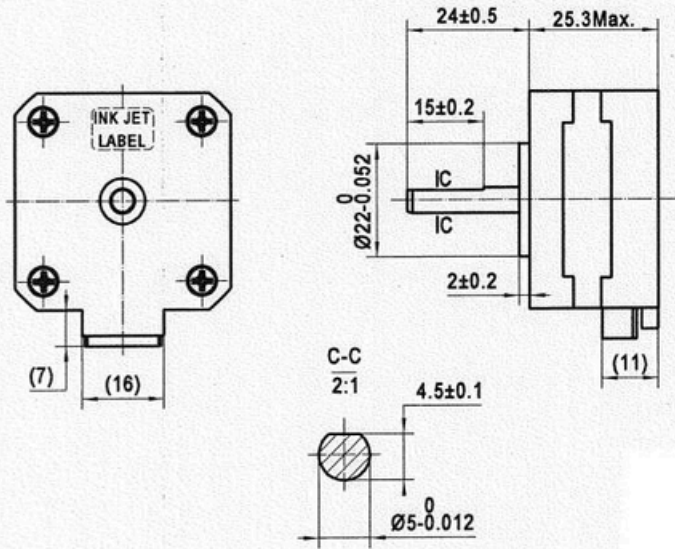


Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	CCW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side

Label Detail



Specifications

1. Number of Phase	2
2. Step Angle	1.8°
3. Rated Voltage	11 V DC
4. Rated Current	0.27 Amp
5. Holding Torque	0.2 Nm Typ. (Two phase on/ rated current)
6. Phase Resistance	40.8 ohm±10%( 20°C)
7. Phase Inductance	52 mH±20%( 1kHz 1V rms)
8. Rotor Inertia	20 gcm <sup>2</sup>
9. Motor Weight	0.15 kg
10. Insulation Class	B( 130°C)

Unit: mm  
 FIRST ANGLE METHOD  
 Tolerances for linear and angular dimensions without individual tolerance indications  
 GB/T 1804-m eqv ISO 2768-1: m  
 Geometrical tolerance for features without individual tolerance indications  
 GB/T 1184-K eqv ISO 2768-2: K

Approve	
Standardize	
Process Review	
Check	
Design	

**PIVEXIN**  
**TECHNOLOGY**

Type: MS17HD5P4027-000 Rev. A SCALE 1:1 Sheet 1 of 1

REV.	REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE
A	Original revision	2017.8.31				