

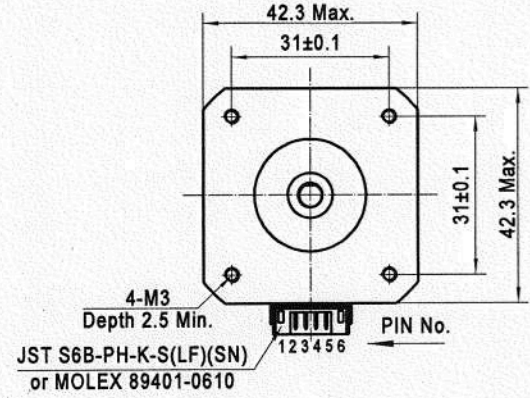


4611110027300

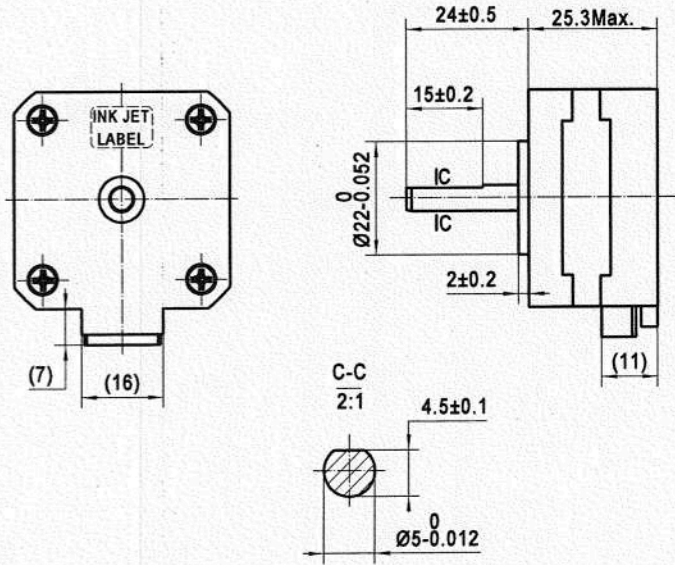


Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	CCW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side

Label Detail

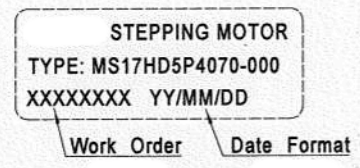

Specifications

1. Number of Phase	2
2. Step Angle	1.8°
3. Rated Voltage	4.55 V DC
4. Rated Current	0.7 Amp
5. Holding Torque	0.21 Nm Typ. (Two phase on/ rated current)
6. Phase Resistance	6.5 ohm±10% (20°C)
7. Phase Inductance	8.8 mH±20% (1kHz 1V rms)
8. Rotor Inertia	20 gcm ²
9. Motor Weight	0.15 kg
10. Insulation Class	B(130°C)

			Unit: mm							
			FIRST ANGLE METHOD							
			Tolerances for linear and angular dimensions without individual tolerance indications							
			GB/T 1804-m eqv ISO 2768-1: m							
			Geometrical tolerance for features without individual tolerance indications							
			GB/T 1184-K eqv ISO 2768-2: K							
REV.	REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	Type: MS17HD5P4070-000	Rev. A	SCALE 1:1	Sheet 1 of 1

PIVEXIN
TECHNOLOGY