

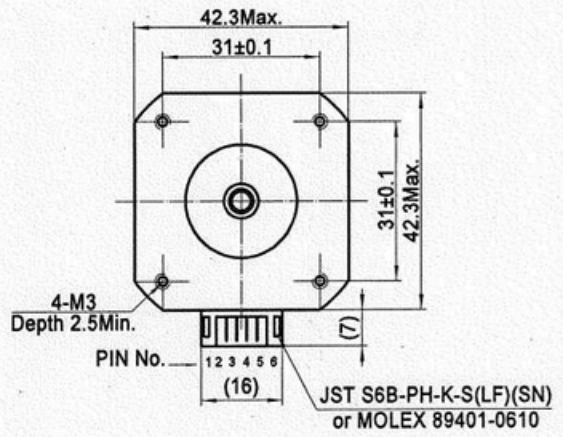


4611110027301

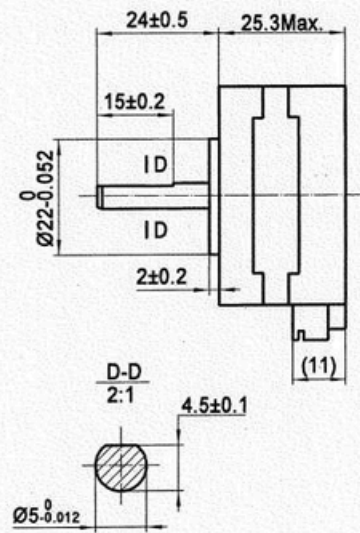

Wiring Diagram



Exciting Sequence vs. Direction of Rotation


STEP	A	B	C	D	
1	+	-	-	-	↑ CCW ↓ CW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side

Specifications

1. Number of Phase	2
2. Step Angle	1.8°
3. Rated Voltage	3.2V DC
4. Rated Current	1.0Amp
5. Holding Torque	0.21N.m Typ.(Two phase on/rated current)
6. Phase Resistance	3.2ohm±10%(20°C)
7. Phase Inductance	4.3mH±20%(1kHz 1V rms)
8. Rotor Inertia	20gcm ²
9. Motor Weight	0.15kg
10. Insulation Class	B(130°C)

Label Detail

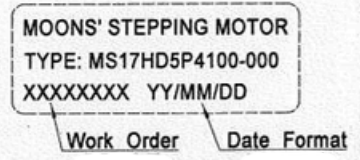

Unit: mm
 FIRST ANGLE METHOD
 Tolerances for linear and angular dimensions without individual tolerance indications
 GB/T 1804-m eqv ISO 2768-1 : m
 Geometrical tolerances for features without individual tolerance indications
 GB/T 1184-K eqv ISO 2768-2 : K

Approve	
Standardize	
Process Review	
Check	
Design	

PIVEXIN
TECHNOLOGY

REV.	REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	SIGNATURE	DATE	Type: MS17HD5P4100-000	Rev.A	SCALE 1:1	Sheet 1 of 1
A	Original revision	2017.08.31							