


Recommended shaft end shape (Fixed-side FK, EK)

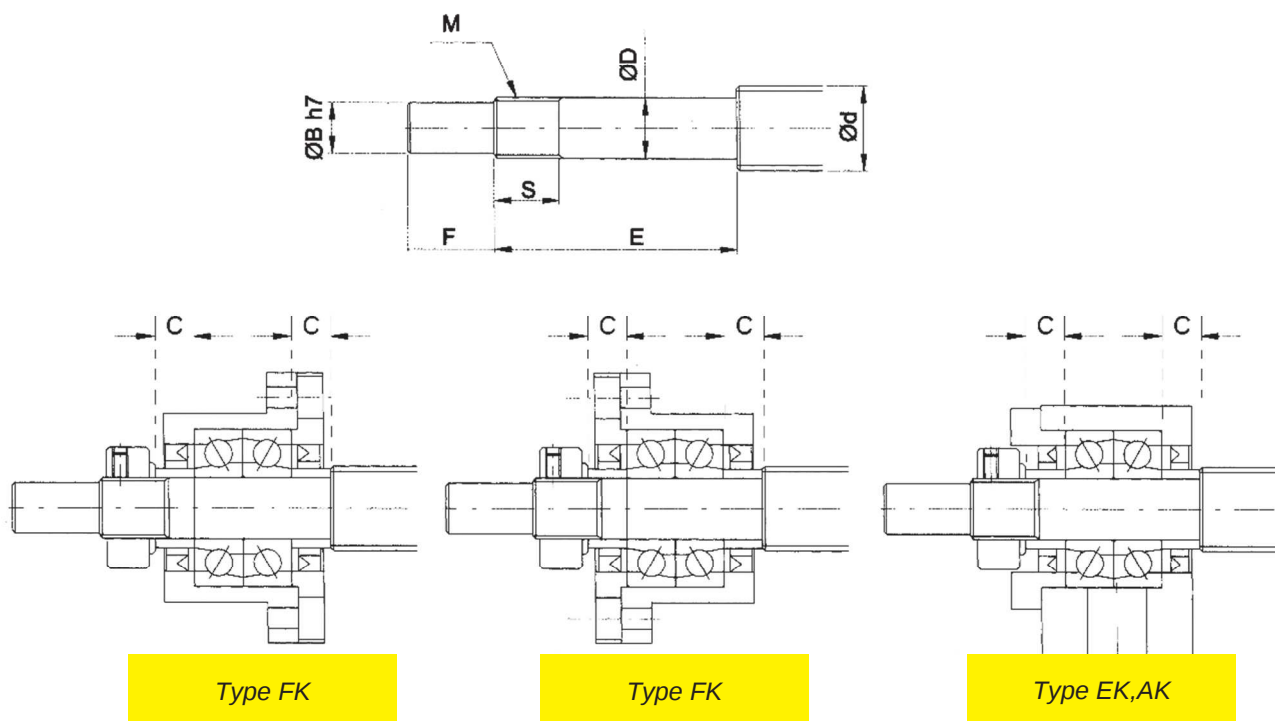

Unit : mm

Support unit model No.					Ballscrew shaft OD	Shaft support portion OD					Metric screw thread		Metric screw thread
FK	FKE	EK	AK	AKE	d	D		B	E	F	M	S	C
FK05	FKE05	EK05	-	-	8	5	-0.005 -0.012	4	25	6	M5X0.5	7	3.5
FK06	FKE06	EK06	-	-	8	6	-0.005 -0.012	4	28	8	M6X0.75	8	5
FK08	FKE08	EK08	-	-	10/12	8	-0.005 -0.012	6	32	9	M8X1	10	5.5
FK10	FKE10	EK10	AK10	AKE10	12/14/15	10	-0.005 -0.012	8	36	15	M10X1	11	5.5
FK12	FKE12	EK12	AK12	AKE12	14/15/16	12	-0.005 -0.014	10	36	15	M12X1	11	5.5
FK15	FKE15	EK15	AK15	AKE15	18/20	15	-0.005 -0.014	12	47	20	M15X1	13	10
FK17	-	-	-	-	20/25	17	-0.005 -0.014	15	58	23	M17X1	15	10
FK20	-	EK20	AK20	-	25/28/30	20	-0.005 -0.014	17	62	25	M20X1	17	11
FK25	-	-	-	-	30/32/36	25	-0.005 -0.014	20	76	30	M25X1.5	20	15
FK30	-	-	-	-	36/40	30	-0.005 -0.015	25	72	38	M30X1.5	25	9