


Koła pod pasy klinowe

Koła pod pasy klinowe pod tuleję TAPER LOCK

SPC/6

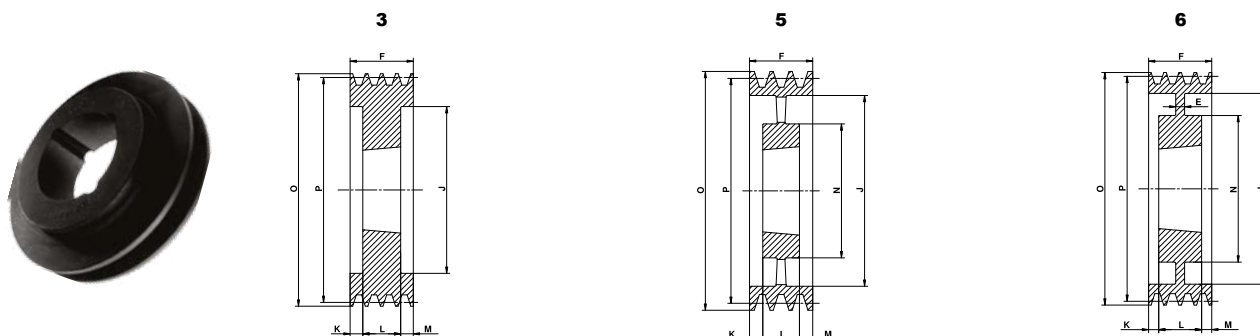

Materiał: żeliwo EN-GJL-200 UNI EN1561

kod	typ	ilość rowków	P	O	rodzaj wykonania	tuleja TAPER LOCK	otwór mac	E	F	J	K	L	M	N
K0710	SPC 200/6	6	200	209,6	3	3535	90	-	162	144	36,5	89	36,5	-
K0711	SPC 212/6	6	212	221,6	3	3535	90	-	162	156	36,5	89	36,5	-
K0712	SPC 224/6	6	224	233,6	3	3535	90	-	162	168	36,5	89	36,5	-
K0713	SPC 236/6	6	236	245,6	3	3535	90	-	162	180	36,5	89	36,5	-
K0714	SPC 250/6	6	250	259,6	3	3535	90	-	162	194	36,5	89	36,5	-
K0715	SPC 265/6	6	265	274,6	3	3535	90	-	162	209	36,5	89	36,5	-
K0716	SPC 280/6	6	280	289,6	6	3535	90	20	162	224	36,5	89	36,5	175
K0717	SPC 300/6	6	300	309,6	6	3535	90	20	162	244	36,5	89	36,5	175
K0718	SPC 315/6	6	315	324,6	6	3535	90	20	162	259	36,5	89	36,5	175
K0719	SPC 335/6	6	335	344,6	6	3535	90	20	162	279	36,5	89	36,5	175
K0720	SPC 355/6	6	355	364,6	6	3535	90	20	162	299	36,5	89	36,5	175
K0721	SPC 375/6	6	375	384,6	6	4040	100	30	162	319	30	102	30	210
K0722	SPC 400/6	6	400	409,6	6	4040	100	30	162	344	30	102	30	210
K0723	SPC 425/6	6	425	434,6	6	4040	100	30	162	369	30	102	30	210
K0724	SPC 450/6	6	450	459,6	6	4545	110	30	162	394	24	114	24	242
K0725	SPC 475/6	6	475	484,6	6	4545	110	30	162	419	24	114	24	242
K0726	SPC 500/6	6	500	509,6	5	4545	110	-	162	444	24	114	24	242
K0727	SPC 530/6	6	530	539,6	5	5050	125	-	162	474	17,5	114	17,5	265
K0728	SPC 560/6	6	560	569,6	5	5050	125	-	162	504	17,5	127	17,5	267
K0729	SPC 630/6	6	630	639,6	5	5050	125	-	162	574	17,5	127	17,5	267
K0730	SPC 710/6	6	710	719,6	5	5050	125	-	162	654	17,5	127	17,5	267
K0731	SPC 800/6	6	800	809,6	5	5050	125	-	162	737	17,5	127	17,5	267
K0732	SPC 1000/6	6	1000	1009,6	5	5050	125	-	162	937	17,5	127	17,5	267
K0733	SPC 1250/6	6	1250	1259,6	5	5050	125	-	162	1187	17,5	127	17,5	267