
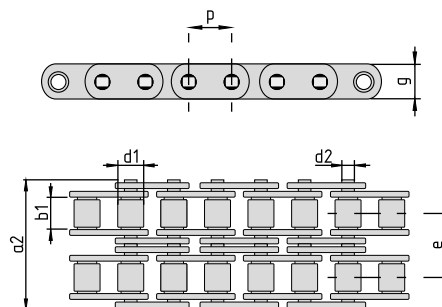


Łańcuchy

Łańcuchy rolkowe z płaskimi ogniwami wg europejskiej normy

DIN 8187 - ISO / R 606

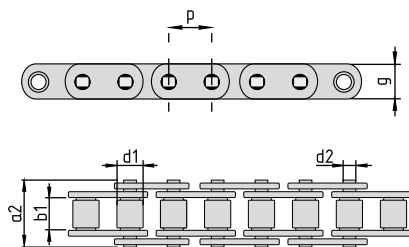

JEDNORZĘDOWE

kod	ISO	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	F _B min N	q [kg/m] ≈
		mm	cale							
D0091	08B-1	12,70	1/2"	7,75	4,45	8,51	16,70	11,50	18.000	0,78
D0092	10B-1	15,875	5/8"	9,65	5,08	10,16	19,50	13,90	22.400	1,03
D0093	12B-1	19,05	3/4"	11,68	5,72	12,07	22,50	16,10	29.600	1,30
D0094	16B-1	25,40	1"	17,02	8,28	15,88	36,10	21,00	60.000	2,90
D0095	20B-1	31,75	1" 1/4	19,56	10,19	19,05	41,30	26,20	95.000	4,15

Na zapytanie dostępne łańcuchy z płaskimi ogniwami w podziałkach 24B-1, 28B-1, 32B-1.



DWURZĘDOWE

kod	ISO	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	e mm	F _B min N	q [kg/m] ≈
		mm	cale								
D0099	08B-2	12,70	1/2"	7,75	4,45	8,51	31,20	11,50	13,92	32.000	1,45
D0096	10B-2	15,875	5/8"	9,65	5,08	10,16	36,20	13,90	16,59	44.500	2,00
D0097	12B-2	19,05	3/4"	11,68	5,72	12,07	42,20	16,10	19,46	57.800	2,62
D0098	16B-2	25,40	1"	17,02	8,28	15,88	68,00	21,00	31,88	106.000	6,92

Łańcuchy

Łańcuchy rolkowe nierdzewne z płaskimi ogniwami wg europejskiej normy

DIN 8187 - ISO / R 606

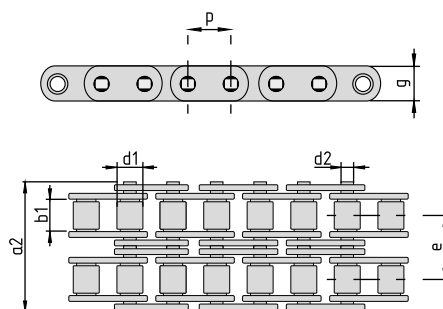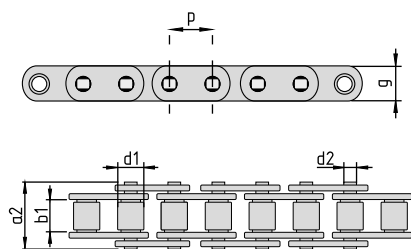

JEDNORZĘDOWE

kod	ISO	podziałka p		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	F _B min N	q [kg/m] ≈
		mm	cale							
D0108	08B-1	12,70	1/2"	7,75	4,45	8,51	17,00	11,60	12.000	0,78
D0109	12B-1	19,05	3/4"	11,68	5,72	12,07	22,70	15,90	17.000	1,30

DWURZĘDOWE

kod	ISO	podziałka p		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	e mm	F _B min N	q [kg/m] ≈
		mm	cale								
D0110	08B-2	12,70	1/2"	7,75	4,45	8,51	31,00	11,60	13,92	21.000	1,55