



Tuleje montażowe

Tuleje rozprężno-zaciskowe BK - nierdzewne

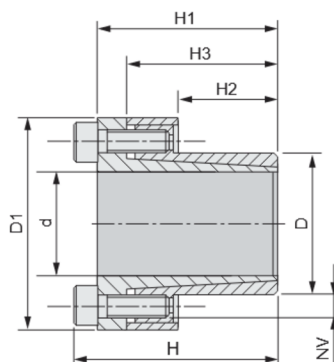

BK80 nierdzewna

kod	d x D mm	H mm	H1 mm	H2 mm	H3 mm	D1 mm	przeniesiony moment Mt Nm	siła osiowa F os. kN	ciśnienie powierzchniowe między		śruby zaciskające			[kg]
									wałem pw N/mm ²	piastą pw N/mm ²	DIN 912 ilość	12.9 typ	siła dociągu Ms Nm	
T0390X	10 x 16	31	27	14	23	29	22	4	82	51	4	M4x12	2	0,17
T0392X	12 x 18	32	28	14	23	32	26	4	69	46	4	M4x12	2	0,18
T0393X	14 x 23	32	28	14	23	38	30	4	59	36	4	M4x12	2	0,20
T0394X	15 x 24	43	37	16	29	44	73	10	107	67	4	M6x18	8	0,21
T0395X	16 x 24	43	37	16	29	44	78	10	101	67	4	M6x18	8	0,23
T0396X	18 x 26	45	39	18	31	47	87	10	79	55	4	M6x18	8	0,27
T0397X	19 x 27	45	39	18	31	49	92	10	75	53	4	M6x18	8	0,29
T0398X	20 x 28	45	39	18	31	50	97	10	71	51	4	M6x18	8	0,30
T0399X	22 x 32	52	46	25	38	54	105	10	47	32	4	M6x18	8	0,38
T0400X	24 x 34	52	46	25	38	56	175	15	64	45	6	M6x18	8	0,31
T0401X	25 x 34	52	46	25	38	56	180	15	62	45	6	M6x18	8	0,45
T0402X	28 x 39	52	46	25	38	61	200	15	55	40	6	M6x18	8	0,47
T0403X	30 x 41	52	46	25	38	62	220	15	51	38	6	M6x18	8	0,48
T0404X	32 x 43	52	46	25	38	65	310	19	64	48	8	M6x18	8	0,51
T0405X	35 x 47	59	53	32	43	66	340	19	46	34	8	M6x18	8	0,63
T0406X	38 x 50	59	53	32	43	72	370	19	42	32	8	M6x18	8	0,67
T0407X	40 x 53	59	53	32	45	75	390	19	40	30	8	M6x18	8	0,73
T0408X	42 x 55	59	53	32	45	78	410	19	39	29	8	M6x18	8	0,78
T0409X	45 x 59	78	70	45	56	86	820	36	48	36	8	M8x22	18	1,23
T0410X	48 x 62	78	70	45	56	87	880	36	45	35	8	M8x22	18	1,24
T0411X	50 x 65	78	70	45	56	92	910	36	43	33	8	M8x22	18	1,40