



Tuleje montażowe

Tuleje rozprężno-zaciskowe BK - nierdzewne

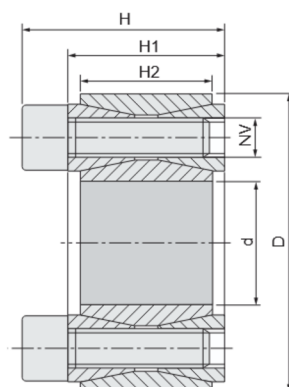

BK40 nierdzewna

kod	d x D mm	H mm	H1 mm	H2 mm	przenoszony moment Mt Nm	siła osiowa F os. kN	nacisk powierzchniowy między		śruby zaciskające		[kg]
							wałem pw N/mm ²	piastą pn N/mm ²	DIN 912 ilość	12.9 typ	
T0232X	20 x 47	26	20	17	110	11	133	57	8	M6x18	0,24
T0233X	22 x 47	26	20	17	120	11	131	57	8	M6x18	0,23
T0234X	24 x 50	26	20	17	150	12	125	60	9	M6x18	0,26
T0235X	25 x 50	26	20	17	155	12	120	60	9	M6x18	0,25
T0236X	28 x 55	26	20	17	170	12	107	55	9	M6x18	0,30
T0237X	30 x 55	26	20	17	185	12	100	55	9	M6x18	0,29
T0238X	32 x 60	26	20	17	265	16	125	66	12	M6x18	0,30
T0239X	35 x 60	26	20	17	290	16	114	67	12	M6x18	0,32
T0240X	38 x 65	26	20	17	390	20	131	77	15	M6x18	0,36
T0241X	40 x 65	26	20	17	410	20	125	77	15	M6x18	0,34
T0242X	42 x 75	32	24	20	595	20	138	78	12	M8x22	0,48
T0243X	45 x 75	32	24	20	635	28	129	78	12	M8x22	0,57
T0244X	48 x 80	32	24	20	680	28	121	73	12	M8x22	0,59
T0245X	50 x 80	32	24	20	700	28	116	73	12	M8x22	0,60