


# Koła pod pasy klinowe

Koła pod pasy klinowe pod tuleję TAPER LOCK

SPA/6

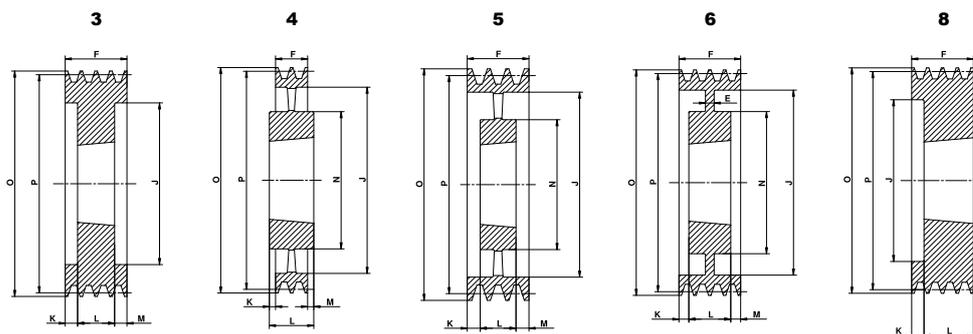

Materiał: żeliwo EN-GJL-200 UNI EN1561

kod	typ	ilość rowków	P	O	rodzaj wykonania	tuleja TAPER LOCK	otwór mac	E	F	J	K	L	M	N
K0411	SPA 100/6	6	100	105,5	3	1610	42	-	95	66	30	25	40	-
K0412	SPA 106/6	6	106	111,5	8	2012	50	-	95	72	63	32	-	-
K0413	SPA 112/6	6	112	117,5	8	2012	50	-	95	78	63	32	-	-
K0414	SPA 118/6	6	118	123,5	8	2012	50	-	95	84	63	32	-	-
K0415	SPA 125/6	6	125	130,5	3	2012	50	-	95	91	31,5	32	31,5	-
K0416	SPA 132/6	6	132	137,5	3	2517	60	-	95	98	25	45	25	-
K0417	SPA 140/6	6	140	145,5	3	2517	60	-	95	106	25	45	25	-
K0418	SPA 150/6	6	150	155,5	3	2517	60	-	95	116	25	45	25	-
K0419	SPA 160/6	6	160	165,5	3	2517	60	-	95	125	25	45	25	-
K0420	SPA 180/6	6	180	185,5	3	3020	75	-	95	146	22	51	22	-
K0421	SPA 200/6	6	200	205,5	3	3020	75	-	95	165	22	51	22	-
K0422	SPA 224/6	6	224	229,5	3	3020	75	-	95	189	22	51	22	-
K0423	SPA 236/6	6	236	241,5	3	3020	75	-	95	202	22	51	22	-
K0424	SPA 250/6	6	250	255,5	6	3020	75	20	95	215	22	51	22	155
K0425	SPA 280/6	6	280	285,5	6	3535	90	25	95	245	3	89	3	175
K0426	SPA 300/6	6	300	305,5	6	3535	90	25	95	265	3	89	3	175
K0427	SPA 315/6	6	315	320,5	6	3535	90	25	95	280	3	89	3	175
K0428	SPA 355/6	6	355	360,5	5	3535	90	-	95	320	3	89	3	175
K0429	SPA 400/6	6	400	405,5	5	3535	90	-	95	365	3	89	3	175
K0430	SPA 450/6	6	450	455,5	5	3535	90	-	95	415	3	89	3	175
K0431	SPA 500/6	6	500	505,5	5	3535	90	-	95	465	3	89	3	175
K0432	SPA 560/6	6	560	565,5	5	3535	90	-	95	525	3	89	3	175
K0433	SPA 630/6	6	630	635,5	4	4040	100	-	95	595	3,5	102	3,5	210
K0434	SPA 800/6	6	800	805,5	4	4040	100	-	95	765	3,5	102	3,5	210
K0435	SPA 1000/6	6	1000	1005,5	4	4545	110	-	95	965	9,5	114	9,5	242