

2022



齒輪減速機 GEAR MOTOR

直交軸
RIGHT ANGLE
平行軸
PARALLEL



SK SGW



SLF



SLH



SNF



SV




SH

<60W> 0.1kW ~ 2.2kW

LIMING REDUCERS

小型齒輪減速機系列 SMALL GEAR REDUCER

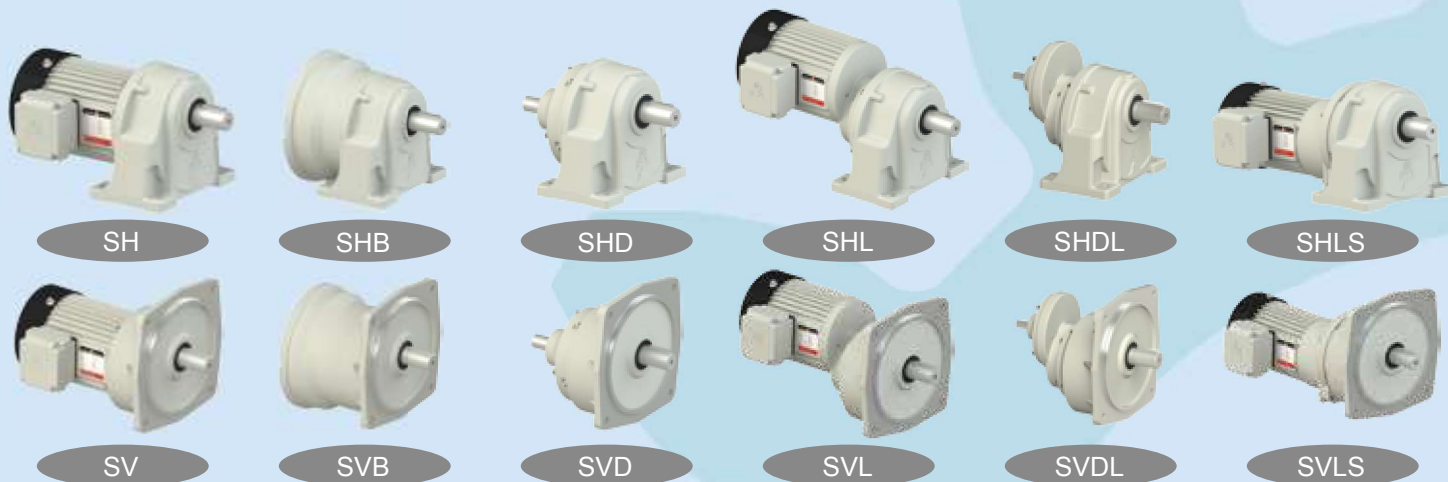

小型戟齒輪減速機系列 SMALL HYPOID GEAR REDUCER



小型同心軸戟齒輪減速機系列 SMALL HYPOID GEAR REDUCER(Concentric Shaft)



註：另有實心軸系列 (SK-D)

NOTE: There are also solid shaft series (SK-D)


小型蝸輪減速機系列 SMALL WORM REDUCER



■ 中空軸蝸輪減速機

Hollow Output Shaft Worm Gear Reducer

■ MODEL : SEOM

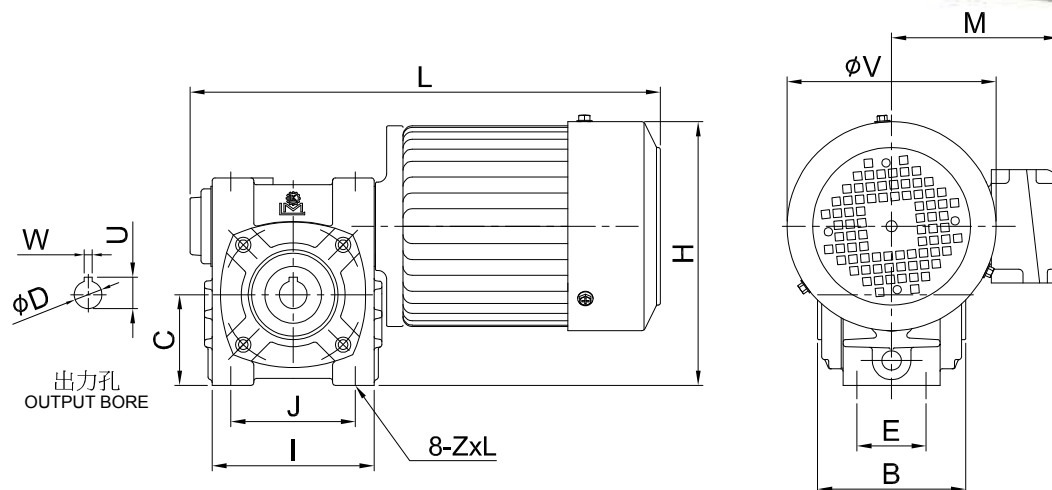


unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	E	B	J	I	C	H	L	M	V	ZxL	出力孔 Output Bore			重量 Weight (KG)
													W	D	U	
1/4HP (0.2kW)	50	1/5~1/60	50	98	90	115	65	185	335	115	137	M8x16	6	20	22.8	13
1/2HP (0.4kW)	50	1/5~1/40(1/50~1/60)	50	98	90	115	65	195	340	121	151	M8x16	6	20	22.8	15
	60	1/5~1/60	55	108	100	125	75	215	355	121	151	M10x18	8	25	28.3	18
1HP (0.75kW)	60	(1/5~1/30)	55	108	100	125	75	220	370	128	163	M10x18	8	25	28.3	20
	70	1/5~1/40(1/50~1/60)	65	128	125	158	85	240	405	128	163	M10x18	8	30	33.3	24

■ 防水型蝸輪減速機

Waterproof Worm Gear Reducer

■ MODEL : SEOM


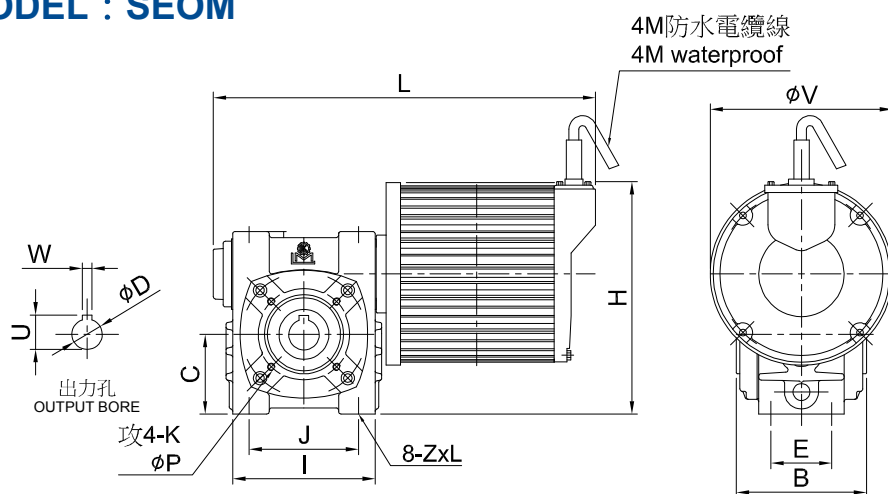


unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	E	B	J	I	C	H	L	V	K	P	ZxL	出力孔 Output Bore			重量 Weight (KG)
														W	D	U	
1/2HP (0.4kW)	50	1/5~1/40(1/50~1/60)	50	107	90	115	65	190	315	150	M6	76	M8x16	8	25	28.5	15
1HP (0.75kW)	60	(1/5~1/30)	50	110	100	125	75	210	350	150	M8	92	M10x18	8	30	33.5	20

■ 小型蝸輪減速機 Hollow Output Shaft Worm Gear Reducer

■ MODEL : SNEOM

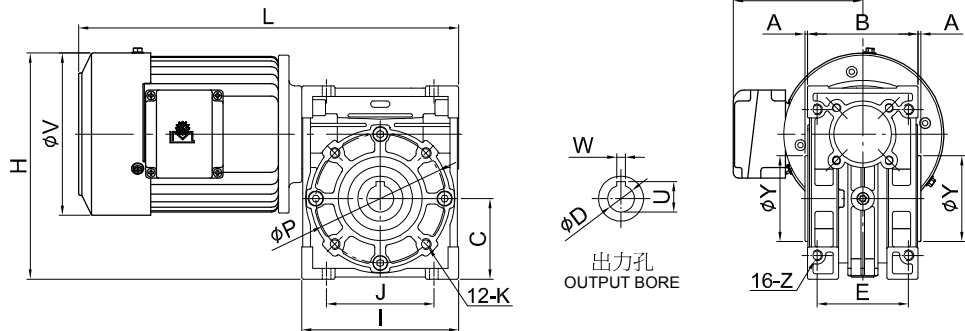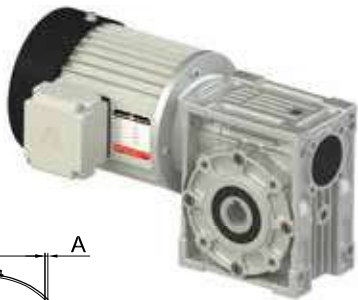

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	A	E	B	J	I	C	H	Y	L	M	V	K	P	Z	出力孔 Output Bore			重量 Weight (KG)
																	W	D	U	
1/8HP (0.1kW)	30	1/5~1/40(1/50~1/60)	2	45	60	55	80	40	132	55	265	108	123	M6	65	M6	5	14	16.3	5
1/4HP (0.2kW)	30	1/5~1/20(1/30~1/60)	2	45	60	55	80	40	139	55	275	115	137	M6	65	M6	5	14	16.3	5.5
1/8HP (0.1kW)	40	1/5~1/60	2	60	80	70	102	50	155	60	295	108	123	M6	77	M8	6	20	22.8	6.5
1/4HP (0.2kW)	40	1/5~1/40(1/50~1/60)	2	60	80	70	102	50	160	60	305	115	137	M6	77	M8	6	20	22.8	8
1/2HP (0.4kW)	40	1/5~1/10(1/20~1/30)	2	60	80	70	102	50	170	60	310	121	151	M6	77	M8	6	20	22.8	9
1/4HP (0.2kW)	50	1/5~1/40(1/50~1/60)	3	70	94	80	120	60	180	70	325	115	137	M6	95	M10	8	25	28.3	9.5
1/2HP (0.4kW)	50	1/5~1/30(1/40~1/60)	3	70	94	80	120	60	190	70	330	121	151	M6	95	M10	8	25	28.3	10.5
1HP (0.75kW)	50	1/5(1/10~1/20)	3	70	94	80	120	60	195	70	350	128	163	M6	95	M10	8	25	28.3	13.5
1/2HP (0.4kW)	60	1/5~1/60	3	85	102	100	146	75	215	80	355	121	151	M8	120	M10	8	25	28.3	12.5
1HP (0.75kW)	60	(1/5~1/40)	3	85	102	100	146	75	220	80	375	128	163	M8	120	M10	8	25	28.3	15.5
1/2HP (0.4kW)	70	1/5~1/60	3	90	118	120	170	85	235	90	385	121	151	M10	140	M10	8	30	33.3	17
1HP (0.75kW)	70	1/5~1/40(1/50~1/60)	3	90	118	120	170	85	240	90	405	128	163	M10	140	M10	8	30	33.3	20
2HP (1.5kW)	70	1/5~1/10(1/15~1/30)	3	90	118	120	170	85	250	90	440	138	181	M10	140	M10	8	30	33.3	25

注：
1. 表中 () 內數字系表示輕荷重使用。
2. 表中重量以配合三相 4P 馬達為主，其它單相、剎車、直流、特殊等馬達重量另訂。
3. 表中 L 內數字以三相馬達為主，其它特殊馬達另訂。
4. 如需特殊馬達規格，請洽本公司業務。
5. 以上數值若有變更，恕不另行通知。

NOTE：
1.Values shown in paranthesis () are used for light loading.
2.Weights shown in the above chart are based on 3-phase 4P motors, weights for single phase, brake, DC, or special motor shall be referred to specific values.
3.Values shown in 'L' column are based on 3-phase motor, other special motor Refer to specific motor refer to specific values.
4.For special motor specifications, please contact our business.
5.Above specifications are subject to change without prior notice.