

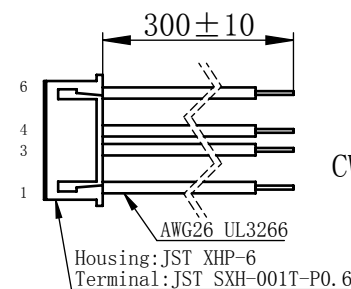
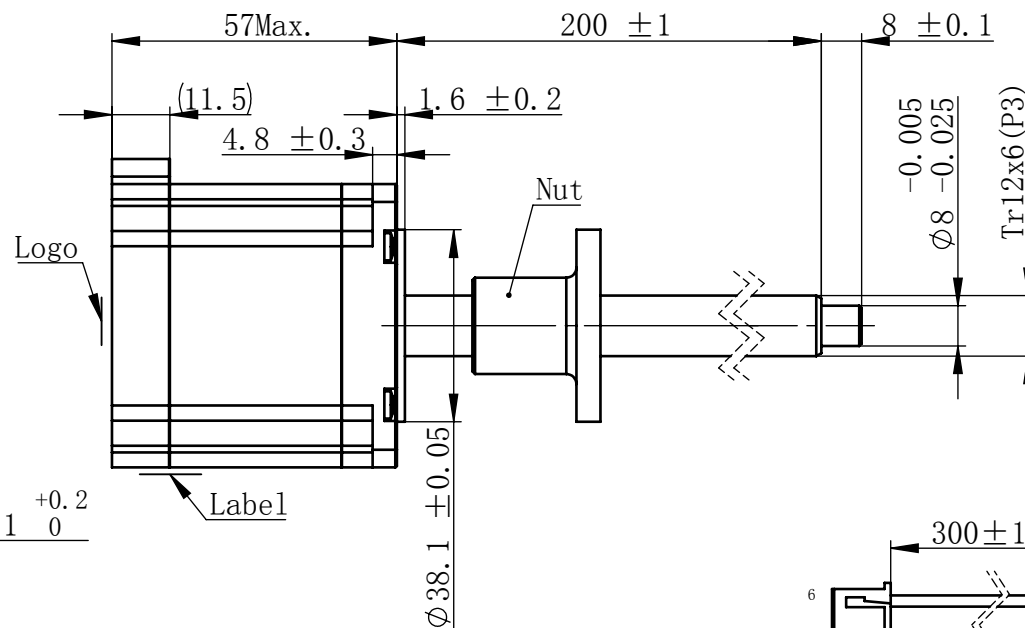


Material NO.

Unit: mm

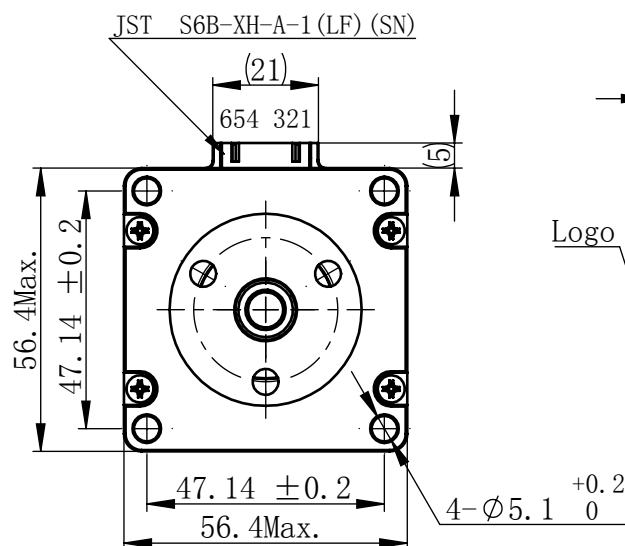

### 励磁顺序 vs. 旋转方向 Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

从安装面看为顺时针方向  
Clockwise view from  
mounting side

电机标签  
Motor label


LEAD SCREW MOTOR  
LE238S-T1206-200-AR6-S-220  
XXXXXXXX


批次号


连接器针位vs. 引线颜色  
Pin No. vs. Lead Wire Colour

Pin No.	颜色 Colour
1	黑 BLA
3	绿 GRN
4	红 RED
6	蓝 BLU

1	相数 Number Of Phase	2
2	步长 Linear Travel/Step	0.03 mm (1.8° )
3	额定电压Rated Voltage	3.5 V DC
4	额定电流 Rated Current	2.2 Amp
5	额定推力 Rated Thrust	135 N(@300rpm, rated current)
6	相电阻 Phase Resistance	1.6 ohm±10% (20℃)
7	相电感 Phase Inductance	7.2 mH±20% (1kHz 1V rms)
8	转子惯量 Rotor Inertia	215 gcm <sup>2</sup>
9	重量 Weight	0.6 Kg
10	绝缘等级 Insulation Class	B(130℃)
11	丝杠直径 Screw Diameter	12 mm
12	丝杠导程 Lead	6 mm

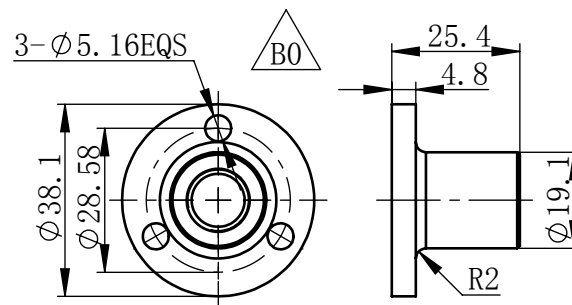

<p>未标注线性尺寸和公差 Tolerance for linear dimensions without individual tolerance indications GB/T 1804-M eqv ISO 2768-1:M</p> <p>未标注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2:K</p>	设计 Design	杨淑娟	2018/1/11
	校核 Check		
	工艺 Process		
	标准化 Standard		
<div></div> <p>I. 请避免螺母脱离丝杠 Keep nut on screw.</p> <p>II. 非专业人士请勿拆解电机 Avoid disassembly without qualification.</p>	批准 Approve		



☐ First Angle Method



材料 Material	总图
----------------	----

Page 1 of 1

**PBC+MOONS'** 上海市闵行区  
鸣嘉路168号  
上海鸣志派博思自动化技术有限公司 (021) 52634688

比例 Scale	零件名 Part Name	直线步进电机
2:3	型号 Model NO.	LE238S-T1206-200-AR6-S-220
B0	物料号 Material NO.	4611110029931

## 规格 Specifications